### ARCHITECTURAL DETAILS

of

## CURTIS WOODWORK

Wausau, Wis. Chicago, III. Sioux City, Iowa Curtis Companies Incorporated
Clinton, Iowa

Lincoln, Nebr. Topeka, Kans. Minneapolis, Minn.



### When You Specify Curtis Woodwork

### This Trademark



### Is Your Guarantee of Woodwork Satisfaction

These Architectural Woodwork Detail Sheets are revised only when a substantial number of changes, eliminations or additions are made in Curtis products.

We reserve the right to make changes in either construction or design, without notice to all holders of Detail Sheets, prior to the publication of a new edition.

Dimensions shown on the Details take precedence over scale measurements.



WOODWORK ITEMS	PLATE NOS.
Blinds	
-	
Basement Sash Unit	
	Kitchen: Section Units
Cabinet Units	Construction Details
	Construction Details
Cabinet Units	Assembly 68
	C-6503, C-6515, C-652057
	C-6505, C-6508, C-6510, C-6511,
9.1114	C-6522, C-6523, C-6526, C-6527 58
China Closets	C (EEO C (EE) C (EEA
	C-6555, C-6556, C-6557 59
China Closets	C-6558, C-6559, C-6562, C-6563,
	C-6564, C-656560
China Closets	C-6560, C-6561, C-6570, C-6571,
	C-6552, C-655361
	C-6979, C-5885, C-5886, C-5888 48
Doors Combination	C-1454, C-1455, C-1460, C-1462,
	C-1465, C-1468, C-1469, C-1471,
	C-1473, C-1485
Doors Exterior	C-1024, C-102721
Danie Enterior	C-1025, C-1028, C-1030, C-1026 22
	C-1029, C-1033, C-1040
	C-1029, C-1033, C-1040
Doors Exterior	C-1150, C-1154
Doors Exterior	C-1130, C-1160, C-1165, C-1210,
Doors Exterior	C-1211, C-1200
Doors Exterior	C-1230, C-1233, C-1239, C-1240 27
	C-1244, C-1246, C-1250
	C-3200, C-3201, C-3210, C-3211 43
Doors Garage	C-1446, C-1445
	C-3020, C-3025, C-3045
	C-3030, C-3040, C-3050, C-3070 41
	C-3090, C-3100, C-3170, C-3095 42
	C-1490, C-1491, C-1492, C-1493 31
Doors Screen	9-14/0/ 6-14/1/ 6-14/2/ 6-14/0 01

WOODWORK ITEMS		LATE NOS.
Doors Slab & Slat	C-3530, C-3300	44
Entrance Frame	C-1701	1
Entrance Frame	C-1726 & C-1737	2
Entrance Frame	C-1745	3
Entrance Frame	C-1707 & C-1742	4
Entrance Frame	C-1721	5
Entrance Frame	C-1731	6
Entrance Frame	C-1735	7
Entrance Frame	C-1724	8
Entrance Frame	C-1740	9
Entrance Frame	C-1743	10
Entrance Frame	C-1709	11
Entrance Frame	C-1730	12
Entrance Frame	C-1733	13
Entrance Frames	C-1719 & C-172014 -	14A
Entrance Frame	C-1748 & C-1755	15
Entrance Frame	C-1750 & C-1764	16
Entrance Frame	C-1754 & C-1756	17
Entrance Frame	C-1761 & C-1765	18
Entrance Frame	C-1767	19
Entrance Frame	C-1768	20
Exterior Moldings	Crown and Bed Molds	45
Exterior Moldings	Drip Caps, Square Edge Material	46
Frames, Silentite	Basement Unit C-2792 & C-279	3 35
Frames, Silentite Case	C-1600, C-1612, C-1624	36
Frames, Silentite Case	C-1648, C-1636	37
Frames, Silentite Case	C-1660	38
A commence of a commence of the commence of th	C-1914, C-1915, C-1916	
	C-1917, C-1917-B, C-1918	
	C-1919, C-1920, C-1921	
	C-1921A, C-1922, C-1922A	
	C-1923, C-1924	
rrames, Silentite Wind.	C-1923, C-1924, C-1928	62

WOODWORK ITEMS		ATE OS.
	C-1980, C-1981, C-1982,	99.
	C-1983, C-1984	83
Frames, Door	C-1985, C-1986, C-1987	84
Frames, Quarter and		
Half Circle Sash	C-1691, C-1692, C-1693, C-1694,	
	C-1802, C-1804	
	Bayside and Brewster	
	Haddon, Plainfield and Harris	
	Mitertite	
	C-6771, C-6773	
	C-4473	
Louvres	C-1806, C-1812	32
Mantels	C-6040, C-6046, C-6061, C-6065	. 51
Mantels	C-6056, C-6059, C-6063, C-6076	52
	C-6043, C-6049, C-6067, C-6074	
	C-6055	
	C-6057	
	C-6072	-
	C-6927, C-6931	
	C-5024	
	Baluster, Railing, Columns, etc.	
	C-2750	
	See Curtis Design Book	
	3	33
	Suggestion Assemblies	-
	Suggestion Assemblies	
	Miscellaneous Parts	
	Miscellaneous Parts	-
	C-6914, C-6916	
Urn	C-2475	34


### PLATE A ENTRANCE FRAMES FRAME C-1737 DOOR C-1033 FRAME C-1745 DOOR C-1033 FRAME C-1707 DOOR C-1023 FRAME C-1742 DOOR C-1033 FRAME C-170I DOOR C-1033 FRAME C-1726 DOOR C-1023 FRAME C-1740 DOOR C-1020 FRAME C-1743 DOOR C-1024 FRAME C-1731 DOOR C-1026 FRAME G-1724 DOOR G-1024 FRAME G-1721 DOOR G-1029 To Help You Select theRightEntrance This sheet illustrates the various Curtis frames drawn to a scale of onequarter inch to the foot. The one-quarter inch scale drawings placed under the sketch will enable the designer to determine which one of the


### many entrance frames would best suit his prob-lem, thereby saving him the time required in reducing the scale of the various details to determine their adaptability. FRAME C-1720 DOOR C-1023


FRAME C-1719 DOOR C-1020 FRAME C-1709 DOOR C-1040 FRAME C-1730 DOOR C-1040 FRAME C-1733 DOOR C-1027


### **ENTRANCE FRAMES**














To Help You Select the Right Entrance


The architectural details of Curtis Standardized Architectural Woodwork have been prepared with the idea of making the details of the utmost value to the architect and designer.


In addition to the regular three-quarter inch scale details of the entrance frames, this sheet illustrates the various Curtis frames drawn to a scale of one-quarter inch to the foot.


The one-quarter inch scale drawings placed under the sketch will enable the designer to determine which one of the many entrance frames would best suit his problem, thereby saving him the time required in reducing the scale of the various details to determine their adaptability.

The three-quarter inch scale drawings of the various entrances will give the detailed information as to scale, size, and construction of the various entrances and frames.


SCALE 1/4" = 1'-0"









FRAME C-1764 DOOR C-1028



FRAME C-1765 DOOR C-1025




FRAME C-1767 DOOR C-1026




FRAME C-1768 DOOR C-1030

tock Sizes	and	Desi	gns-S	Silent	ite P	re-Fi	t Gla	zed W	/indow	/s					·					PLATE
2-21	2'-0"	2'-6'	2'-6'E" 2'-4" 2'-0"	2'-6'	2'-10 8"	2'-8"	2'-8" 2'-4"	3-2 fg " 3-0" 2-8"	3'-2 #"	3'-0"	3'-6 8"	3-68"	3'-6'8"	3'-6"	3'-6# 3'-4" 3'-0"	3-10 8"	3'-108"	4'-2 #"	4-2 #" 4'-0" 3'-8"	MASONRY OPENING ROUGH STUD OPENING SASH OPENING
5'-0//6" 4'-8//6" 4'-4//6" 3'-8//6" 3'-	4 ¢-2768	C-2754  C-2754  C-2768	G-2772  G 3   G 3	\$\frac{\partial \text{\$\frac{20}{7}\$}}{\text{\$\curlet{\curlet{\curlet}{\curlet{\curlet}{\curlet{\curlet}{\curlet{\curlet}{\curlet{\cur	\$\frac{2-4"}{\begin{array}{cccccccccccccccccccccccccccccccccccc	2- 4"	C-2764  24  7  C-2764	G-2769  G-2769	2'- 8"  2'- 8"  3'	C-2764  28  6-2764  28  7  C-2764  28  7  C-2764  28  7  C-2764  28  7  C-2764	C-2772    (2)   (3)   (3)   (4	3'- 0'	3'- 0"  32- 8	SINGLE SAY TO MULLIG TC TRIPLE TO TO HEIGHT	ROUGH ST FRAME W SH OPENIN. TAL GLASS IN FRAME W ITAL SASH ITAL SASH ITAL SASH ITAL GLASS	FUD OPENING PLUS — SPLUS — SPL	LUS——	4" TRIF 8 1F 8 20" HEIO 10" IF 3/2	MA GÉE FRAME SASH OPENIM TOTAL GLAS LION FRAME TOTAL SASH TOTAL GLAS PLE FRAME W TOTAL SASH AND MOLD IS WIDTH SHOW GHT ALL FRA SASH OPENI TOTAL GLAS	SASH OPENING  SOURY OPENING  WIDTH-WITH BAND MOLD  SEPLUS  OF OR SEPLUS  SEPLU
6'-101/6'					C-2775			C-2775			C-2780	C-2775				C-2780		C-2780		CURTIS

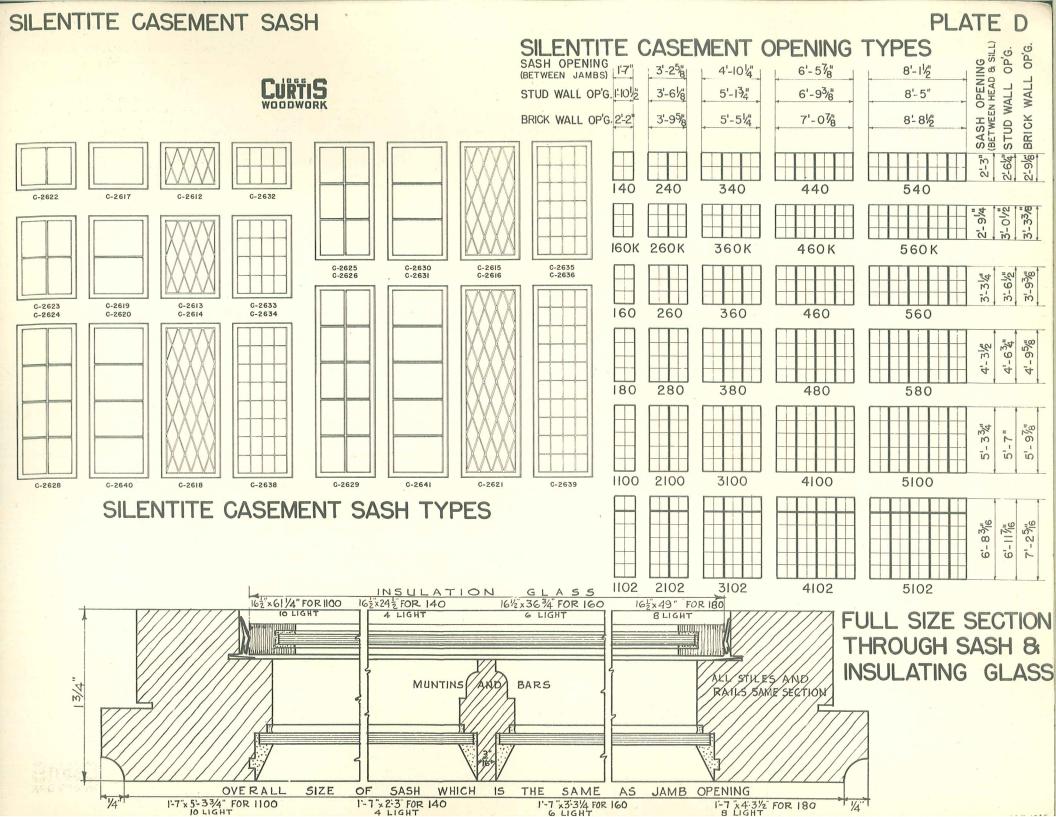

DETAIL OF BAY WINDOWS WITH 45 DEGREE ANGLES AT SIDES MADE FROM STANDARD SILENTITE FRAMES AND WINDOWS.

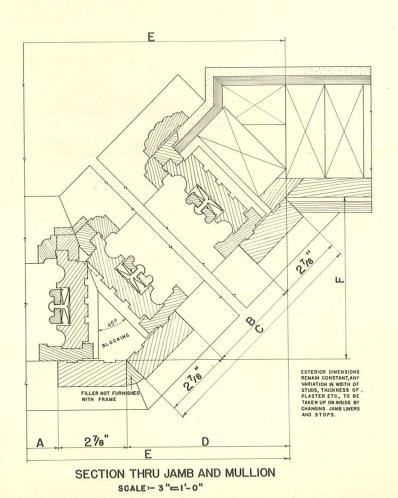

C-45 CEN. 9"X 12"-16 LT SDS 10" X12"-8 LT A-45
CENTER 9"X 12"- 16 LT.
S D S. 9% X 12"- 12 LT B-45 CEN. 9% X 12-12 LT SDS. 9% X 12-12 LT D-45 CEN. 95/6 X 12-12 UT E-45 CENTER (2) 95%" X 12"-12 LT SV5 10" X 12"-8 LT. H-45
CEN 10" X 12"- 16 LT.
SDS 10" X 12"- 8 LT 1-45 CEN. 1011/16 X 125 12 17 SDS. 107 X 127-8 LT. F-45 J-45 G-45 CENTER 10"X 12"- 16 LT5.


SIDES 10 1/6 X 12"- 12 LT

SIDES 10 1/6 X 12"- 12 LT CENTER 9"X 12"-20 LT. K-45 L-45 M-45 N-45 0-45 P-45 CEN. 8" X 12"- 12 LT. SDS. 8" X 12"- 12 LT. CEN. 8" X 12"- 15 LT. SDS. 8" X 12"- 15 LT. CENTER 8"X 12"-16 LT CEN. 8"X 12- 12 LT CEN.8"X 12"-16 LT. CEN. 8"X 12"- 20 LT. 5 D.S. 8" X 12"- 15 LT ELEVATIONS SCALE:-1/8"= 1'-0"


SCHEDULE OF VARIABLE DIMENSIONS												
Design No.	Center Opening	Side Openings	A	В	С	D	E	F				
A-45	3-4x4-6	2-8x4-6	3-4	2-8	3-1 3/4	2-2 3/4	8-3 1/4	2-2 3/4				
B-45	2-8x4-6	2-8x4-6	2-8	2-8	3-1 3/4	2-2 3/4	7-7 1/4	2-2 3/4				
C-45	3-4x4-6	2-0x4-6	3-4	2-0	2-5 3/4	1-9 1/32	7-3 13/16	1-9 1/32				
D-45	2-8x4-6	1-8x4-6	2-8	1-8	2-1 3/4	1-6 3/16	6-2 1/8	1-6 3/16				
E-45	5-6x4-6	2-0x4-6	5-6	2-0	2-5 3/4	1-9 1/32	9-5 13/16	1-9 1/32				
F-45	3-8x4-6	3-0x4-6	3-8	3-0	3-5 3/4	2-5 3/4	9-1 1/4	2-5 3/4				
G-45	3-0x4-6	3-0x4-6	3-0	3-0	3-5 3/4	2-5 3/4	8-5 1/4	2-5 3/4				
H-45	3-8x4-6	2-0x4-6	3-8	2-0	2-5 3/4	1-9 1/32	7-7 13/16	1-9 1/32				
I-45	3-0x4-6	2-0x4-6	3-0	2-0	2-5 3/4	1-9 1/32	6-11 13/16	1-9 1/32				
J-45	3-4x5-6	2-8x5-6	3-4	2-8	3-1 3/4	2-2 3/4	8-3 1/4	2-2 3/4				
K-45	3-0x4-6	2-4x4-6	3-0	2-4	2-9 3/4	1-11 7/8	7-5 1/2	1-11 7/8				
L-45	2-4x4-6	2-4x4-6	2-4	2-4	2-9 3/4	1-11 7/8	6-9 1/2	1-11 7/8				
M-45	3-0x4-6	1-8x4-6	3-0	1-8	2-1 3/4	1-6 3/16	6-6 1/8	1-6 3/16				
N-45	2-l <sub>4</sub> x <sub>1</sub> 4-6	1-8x4-6	2-4	1-8	2-1 3/4	1-6 3/16	5-10 1/8	1-6 3/16				
0-45	3-0x5-6	2-4x5-6	3-0	2-4	2-9 3/4	1-11 7/8	7-5 1/2	1-11 7/8				
P-45	2-4x5-6	2-4x5-6	2-4	2-4	2-9 3/4	1-11 7/8	6-9 1/2	1-11 7/8				

DETAIL OF BAY WINDOWS WITH 30 DEGREE ANGLES AT SIDES MADE FROM STANDARD SILEN— TITE FRAMES AND WINDOWS

### CURTIS WOODWORK

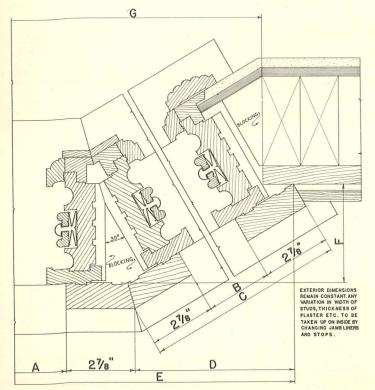

SECTION THRU JAMB AND MULLION
Scale:- 3"=1'-0"

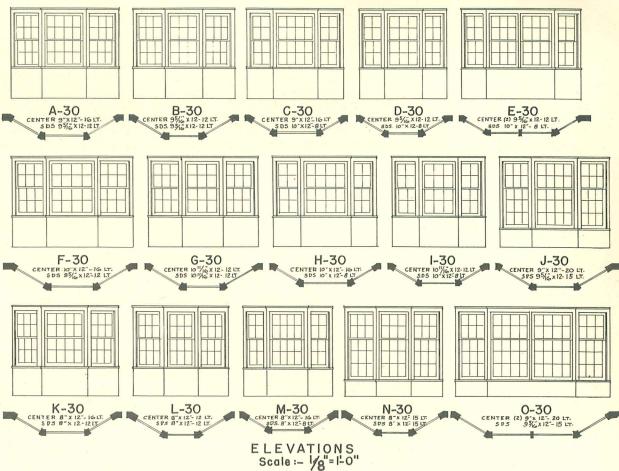

		SCHEDUL	.E 0	F VA	RIABLE	DIMENSIONS					
Design No.	Center Opening	Side Openings	A	В	С	D	E	F	G		
A-30	3-4x4-6	2-8x4-6	3-4	2-8	3-1 3/4	2-8 11/16	9-3 1/8	1-6 7/8	9-0 1/2		
B-30	2-8x4-6	2-8x4-6	2-8	2-8	3-1 3/4	2-8 11/16	8-7 1/8	1-6 7/8	8-4 1/2		
C-30	3-4x4-6	2-0x4-6	3-4	2-0	2-5 3/4	2-1 3/4	8-1 1/4	1-2 7/8	7-10 5/		
D-30	2-8x4-6	2-0x4-6	2-8	2-0	2-5 3/4	2-1 3/4	7-5 1/4	1-2 7/8	7-2 5/8		
E-30	5-6x4-6	2-0x4-6	5-6	2-0	2-5 3/4	2-1 3/4	10-3 1/4	1-2 7/8	10-0 5/		
F-30	3-8x4-6	2-8x4-6	3-8	2-8	3-1 3/4	2-8 11/16	9-7 1/8	1-6 7/8	9-4 1/2		
G-30	3-0x4-6	3-0x4-6	3-0	3-0	3-5 3/4	3-0 1/8	9-6	1-9	9-3 3/8		
H-30	3-8x4-6	2-0x4-6	3-8	2-0	2-5 3/4	2-1 3/4	8-5 1/4	1-2 7/8	8-2 5/8		
I-30	3-0x4-6	2-0x4-6	3-0	2-0	2-5 3/4	2-1 3/4	7-9 1/4	1-2 7/8	7-6 5/8		
J-30	3-4x5-6	2-8x5-6	3-4	2-8	3-1 3/4	2-8 11/16	9-3 1/8	1-6 7/8	9-0 1/2		
K-30	3-0x4-6	2-4x4-6	3-0	2-4	2-9 3/4	2-5 3/16	8-4 1/8	1-4 7/8	8-1 1/2		
L-30	2-4x4-6	2-4x4-6	2-4	2-4	2-9 3/4	2-5 3/16	7-8 1/8	1-4 7/8	7-5 1/2		
M-30	3-0x4-6	1-8x4-6	3-0	1-8	2-1 3/4	1-10	7-1 3/4	1-1	6-11 1,		
N-30	2-4x5-6	2-4x5-6	2-4	2-4	2-9 3/4	2-5 3/16	7-8 1/8	1-4 7/8	7-5 1/2		
0-30	6-10x5-6	2-8x5-6	6-10	2-8	3-1 3/4	2-8 11/16	12-9 1/8	1-6 7/8	12-6 1/		

JAN. 1946

## Woodwork Curtis for Specifications Standard

a schedule to appear at various specific items other necessary descriptive matter. positions in the specifications, listing the is to make to do this the head of the specification indicating the design numbers and convenient way be inserted in the proper that are to be furnished. Curtis Design Book, current edition. Paragraphs should Curtis Woodwork the

# Finished Woodwork:

All interior finish woodwork throughout shall be Curtis odwork of standard designs as shown in their Design Book as identified on drawings by numbers. I. All interior Woodwork of stan pur

Wherever the word "pine" is used it refers to Ponderosa Pine.

be of Architectural the Curtis trademark to various items of woodwork Numbers refer to the Curtis Design Book All woodwork shall bear the Woodwork, current edition. identification on located for

all Jo bottom rails ink trademark on the follows:

windows and doors. A black indelible sash, winder

-plom a steel die on all SILENTITE frame all Jo on the back steel die r An impression made by ings. trim and casings. An impression made by

no trademark blue and gold semi-metal on the inside of drawers. A blue

wider. pue A metal trademark on kitchen wall units 28 in.

### Doors:

All doors shall be of the size and thickness shown on plans. Solid doors shall be made of pine stiles and rails with solid or laminated panels. in accordance with design of doors.

be doors Stiles and rails of all doors, both veneered and solid, shall held together with hardwood dowels. Sash and paneled doc shall have the standard Curtis ovolo molding around edges stiles, rails and muntins.

insure strength at that particular point and contractors shall take care not to cut away all dowels of a cross member when cutting in a lock mortise. The correct position of the mortise will avoid this,

joints between Hardwood doors shall have built-up pine cores, well to prevent swelling or shrinkage. with the joints bet cores well staggered and well broken: cores to be cove veneer. made from 1/8," stock, applied to the core verade of water-resisting glue.

Exterior glazed and Exterior French doors shall have all glass set with wood stops: the glass to be bedded in putty to prevent rattling or leakage of water. No hammer marks shall appear on finished surfaces of stops or any other portions of the doors and all nails shall be set carefully.

and oil. Ilads bna top All hardwood doors shall be delivered in the white a ve a coat of filler as soon as received. When fitted, ttom edges of doors shall have a thick coat of lead have a coat of bottom

## Door Frames:

exposed of pine: all to be free from knots or other defects. made Door frames shall be

Frames shall be delivered to the job well bundled and fastened together to keep parts of the frame from being marred or bruised. Each member of the frame shall be carefully and accurately machined in order that it may be set up with a minimum of

## Screen Doors:

rurnish and install where shown or noted on drawings Curtis flush molded screen doors. Screen doors to be regular dowel construction. Black screen 12 mesh to inch: galvanized or bronze 16 mesh to the inch.

## Blinds and Shutters:

Blinds and shutters shall be made of clear pine, with mortise and tenon, set with barbed dowel pins: all parts to be accurately machined. Blinds and shutters to be 11%" thick.

## and Windows: Pre-Fit Frames SILENTITE

Furnish and install Silentite frames and windows for all window openings

Frames shall be made of Pine, dipped in a solution of Curtis toxic preservative oil dip. The jambs shall be provided with grooves for balancing springs and a plow running the full length of side jamb and mullion jambs to receive the double Z type bronze 'weatherstrip' and flexible sliding bar.

with All horizontal members of the sash shall be completelyweatherstripped with type bronze weatherstrips furnished by the manufacturer as part of unit.

jo Locking hardware shall be furnished as part of each sash unit consisting new bolt type action lock, finished brush brass.

Windows shall be made of Pine, toxic dipped, and completely pre-fitted to fit the frames. Windows shall include all necessary balancing springs, books, screws, and sliding bars and locking device. Complete instructions for installation shall accompany the frames and sash. Windows shall be glazed with flat drawn glass. Glass shall be beld by adequate tacking and best grade of putty. There shall be a back putty rabbet behind the glass providing for the insection of putty on the inside of the window. There shall be a putty groove in the bottom of the putty rabbet to hold outside putty firmly in place.

### Screen:

Furnish and install in all window openings Curris pre-fit screens. All screens to be made of clear pine and shall be pre-fitted to the Silentite frame. They shall have top ribs to enter a groove in head casing of frame. Through mortise and tenon construction must be used throughout. Screen wire shall be stretched tightly and held at all edges by rolling it into anchoring grooves. The mold shall be securely nailed over the screen screen wire to be 16-mesh. Hardware shall consist of the Curtise convenient safety catch type at the top and the hook type clips at the sides. Screens to be fully machined to receive the hardware than the holds shall be machined in bottom rails to facilitate casy adjustment.

## Storm Sash:

Furnish and install Curtis pre-fit storm sash for all window openings indicated on plans. Storm sash shall be of pine accurately machined and pre-fitted to the Silentite frame in the same manner and with the same hardware as the screen above mentioned. The following openings should have Curtis protectorvent storm sash. (Herein list the number or location of openings requiring protectorvent sash for ventilation.) Glazing shall be same as the windows.

# SILENTITE Pre-Fit Casement:

All casement windows indicated on plans shall be Silentite pre-fit casements. The frame shall be made of Pine, dipped in a solution of Curtis toxic preservative oil dip. The frame shall be furnished with the proper size jamb liners and shall be fit plumb and true in the opening: securely wedged and held in alignment during construction.

Stationary sash shall be securely screwed in place. Opening or floating sash: shall be supported with special designed Curtis hardware consisting of adjuster and supporting arms. Adjuster and chain complete with steel crank finished in statuary bronze. The floating sash shall be of the sizes and design as shown on plans and completely installed in frame with the metalane weather-stripping parts furnished and installed with each complete frame.

### Screen:

supplied ete with All openings for sash indicated to swing out shall be supplied with a pre-fitted reversible type Silentite screen complete with bullet catches and pendant pull handle furnished by manufac-

## Insulating Glass:

Unless otherwise specified furnish and install in each opening Silentite pre-fit insulating glass. The insulating glass to be inserted into the regular sash rabbet and held in place by metallane weatherstripping furnished by the manufacturer.

JAN. 1946

# Basement Unit:

All basement windows shall be Curtis units complete including frame. sash and screen. All wood parts shall be made of Pine. dipped in a solution of Curtis toxic preservative oil dip. Sash to be glazed with SSB glass: screen with 16 mesh bronze wire cloth. Units shall be completely factory assembled with sash and screen fitted into set-up frame and all hardware applied.

## Storm Sash:

storm sash for all basement units. accurately machined and pre-fitted Furnish and install pre-fit storm Storm sash shall be of Pine accurat to the Silentite basement unit.

## Sash): (Circle ROTOVENT

All circular windows indicated on plans shall be Curtis stand-id rotovent units. All wood parts shall be of Pine dipped in solution of Curtis toxic preservative oil dip. The sash shall glazed with SSB glass: screen with 16 mesh bronze wire oth. Units shall be completely factory assembled with sash ad screen fitted into set-up frame and all hardware applied. and screen ard

## Storm Sash:

Furnish and install pre-fit storm sash for all circular windows as indicated on plans.

# TRIM for Doors and Windows: MITERTITE

Mitertite Trim shall be of standard Curtis designs and sizes identified on the drawings by design book numbers.

The head casings to be accurately machined to exact length with patented joint (Pat. No. 1940000) at each end. The reverse joint to be machined on the upper end of each right and left side casing. Stool to be horned at both ends and the ends returned on the solid. Apron to be cut to exact length and returned on the solid. Window head stops to be cut to exact length and relength and mittered at both ends. Door side casings and stops to be furnished long enough with respect to allowance for plinth blocks and threshold.

Trim shall be delivered to the building, direct from protec-

Trim shall be delivered to the building, direct from protective cartons in which it is shipped by the manufacturer.

## Stairways:

(For factory built stairs). Stairways shall be finished and crected in accordance with awings. All material shall be fully machined at the factory d the complete stairway delivered to the contractor ready for drawings. and the

## Alternate:

(For stair parts to be assembled at building.)
All Curtis standard stair parts of the sizes and designs as shown on drawings and details to be furnished and used throughout. All cutting and fitting to be done on the job. A bolt shall be furnished with each volute, easing or gooseneck, to be used to fasten these members to the main hand rail.

## CABINET WORK:

All materials used in face of cabinet work shall be from 1-1/8" stock, all joints to be blind tenoned and glued. Rails must be carefully relished to fill mortise. All mantel shelves and similar moldings shall be made of solid stock and returned on the solid. Unless otherwise specified in design book all china cases shall be furnished knocked down complete with built-up fronts, shelves, and back corner or end boards dadoed to receive shelves.

## SLIND KITCHEN SECTIONAL

All units shall Kitchen units shall be selected from the Curtis design book. primed at the factory with two coats of white primer.

to be applied by contractor. Hinges, door and drawer pulls to be made of steel except the sockets and pins of the hinges which are of solid brass, finished polished Hardware shall be furnished by manufacturer of units, packed with each unit,

and tenoned together in such a manner as to make an extremely rigid assembly. The inside corners of the corner posts shall be cut on an angle eliminating square in-All doors shall be of flush construction with a lip overlapping the All drawers shall be of dovetail and lip construction. The corner posts and top and bottom rails shall be mortised rails of the units. side corners.

shall be made slightly narrower at back than at front and shall run on A metal button shall be placed on the back rail of drawer to permit of easy sliding. a birch or maple center guide so as to prevent binding. They

All materials used in face of unit shall be from 1-1/8" stock; all joints to be Rails must be carefully relished to fill mortise. blind tenoned and glued.

Toe space shall be provided by erecting the unit on strips three inches high, inset two inches from the front edge of the base units.

Curtis adjustable jambs shall be used throughout, all to be accurately machined with the head jamb cut to exact length and dadoed into the side jambs.

and sizes Interior trim shall be of standard Curtis designs identified on the drawings by design book numbers. It shall be made from well seasoned wood, free freets, accurately machined: where molded edge is us

pronsed

Яt at especially pur file to be sharp and clean cut.

All trim and molding to be made exact size a steel templet to insure uniformity of all moldings. miter corners.

All flat surfaces to be m
Casings, base, etc., to b

permit of tight to machine sanded. be backed out

fit

to cut against plaster wall. All trim to be delivered on building premises imate lengths.

# Exterior Woodwork:

All trim to be delivered on building premises cut free from all defects and all profiles cut clear and sharp according to details All exterior woodwork shall be delivered to the building clean


### General:


Hardware for doors, windows, screens, blinds and cabinet work to be included under another contract but shall be set by


the general contractor.


Woodwork shall not be delivered to the building until the building is thoroughly dry and care must be taken as far as possible to avoid wet or damp weather in transportation; when received at the building site it shall be stored in a place away from all moisture and dampness and shall be suitably protected against damage until set in place.


Face of all woodwork, both exterior and interior, which is to be painted and the back of all woodwork which is to be painted and the back of all woodwork which is to be painted shall be given one priming coat of lead and oil upon delivery to the building.

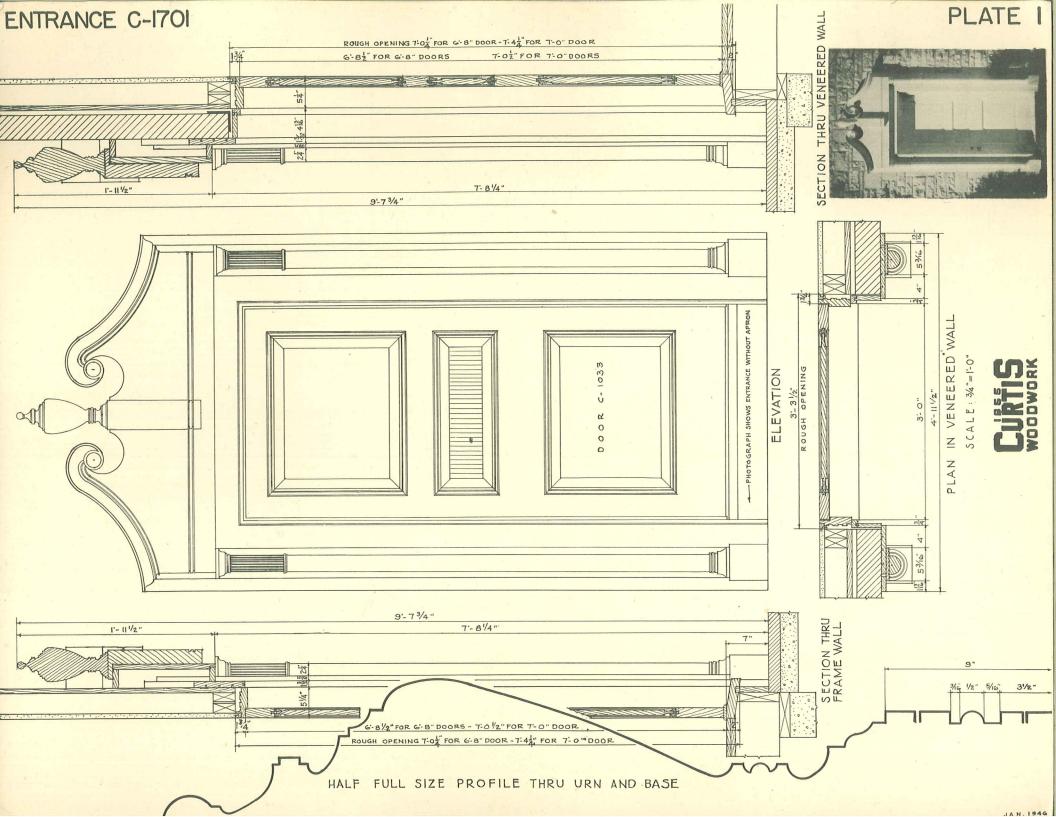


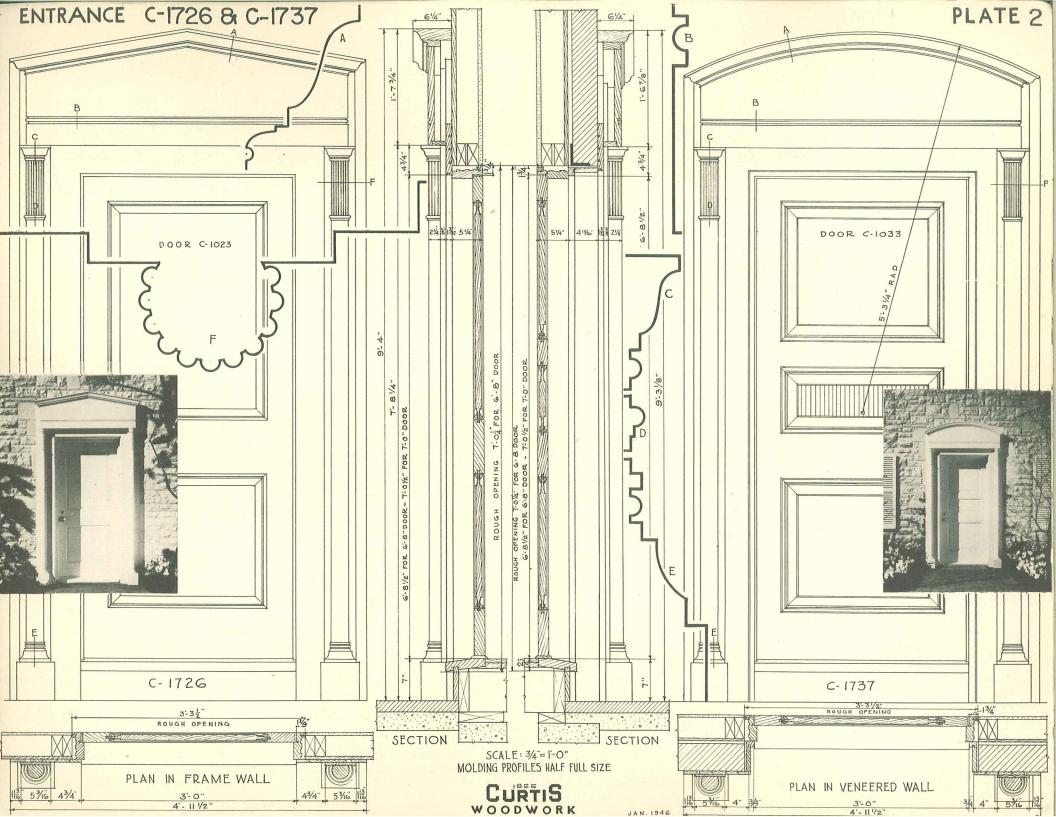


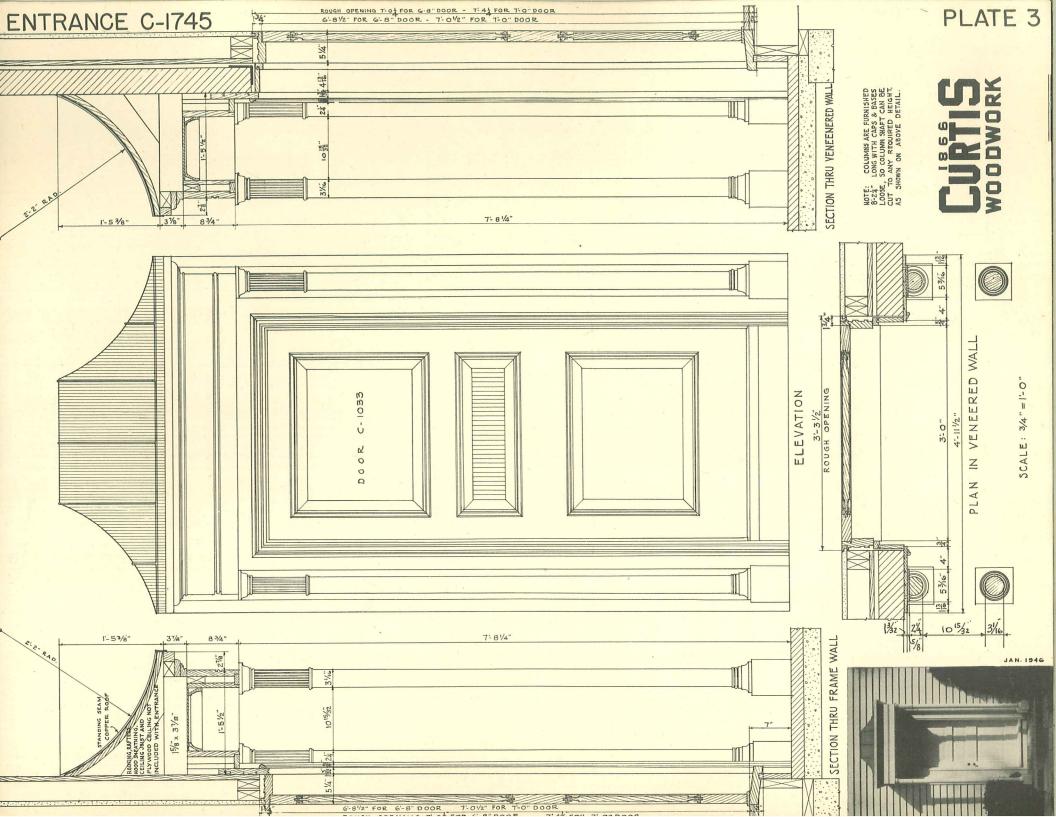


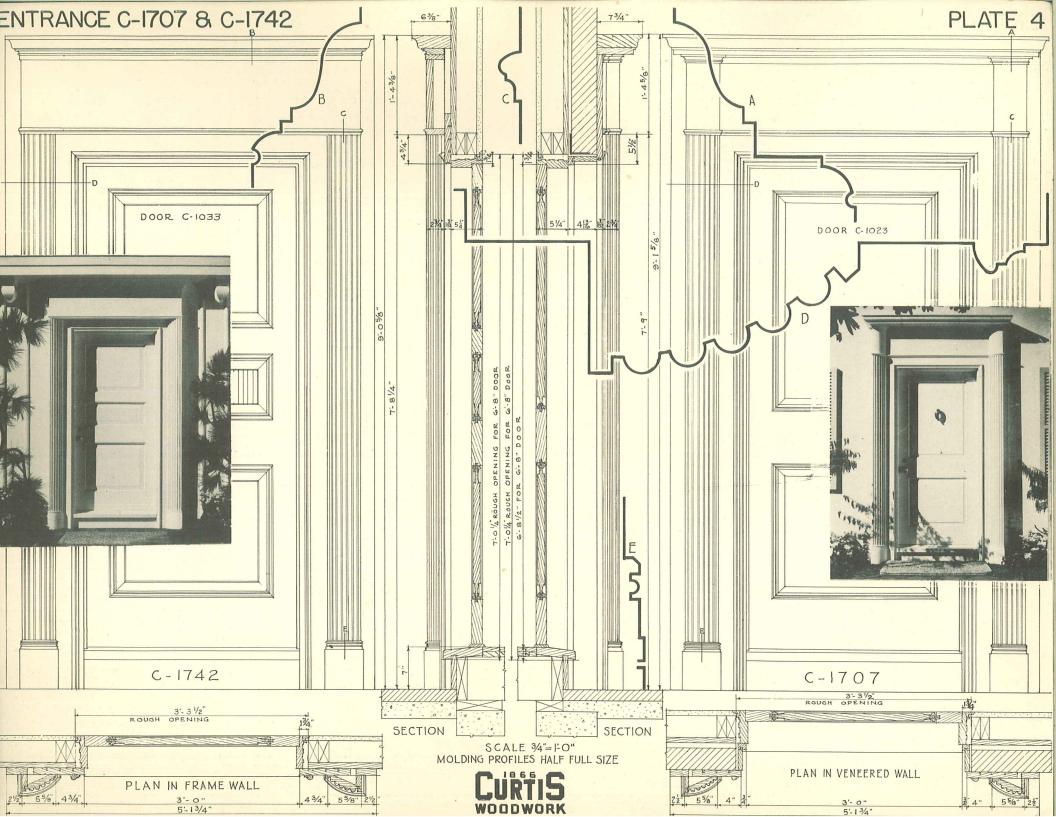


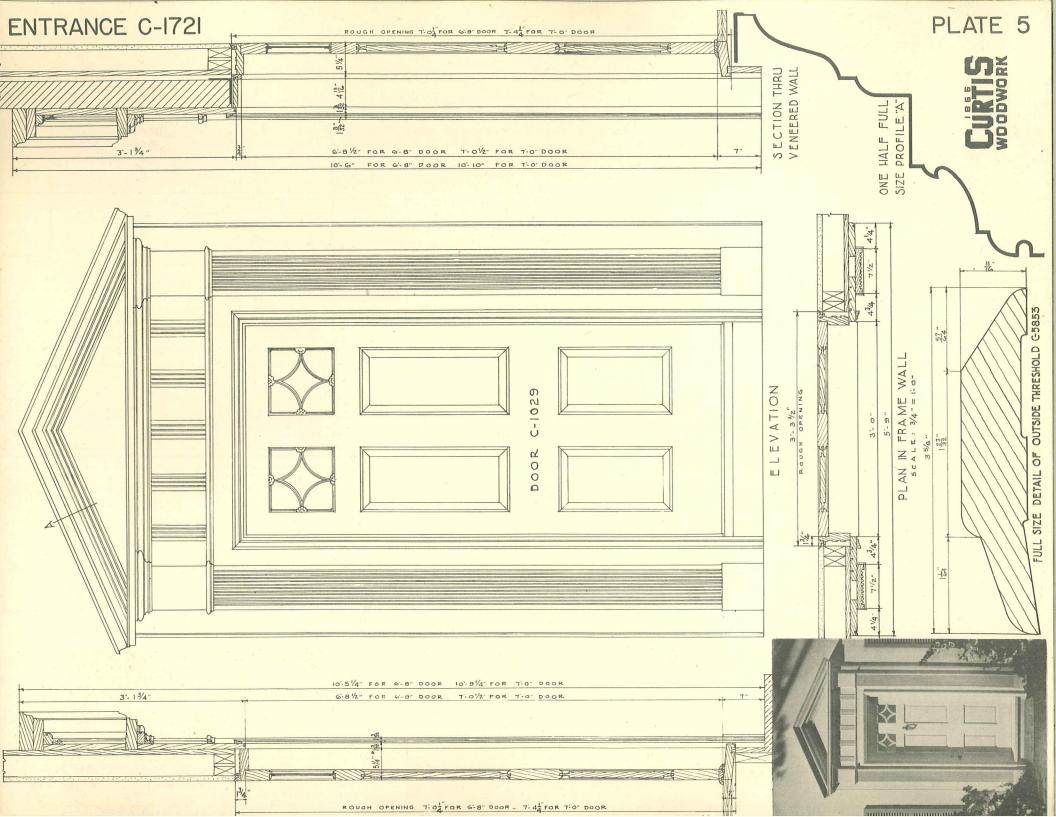


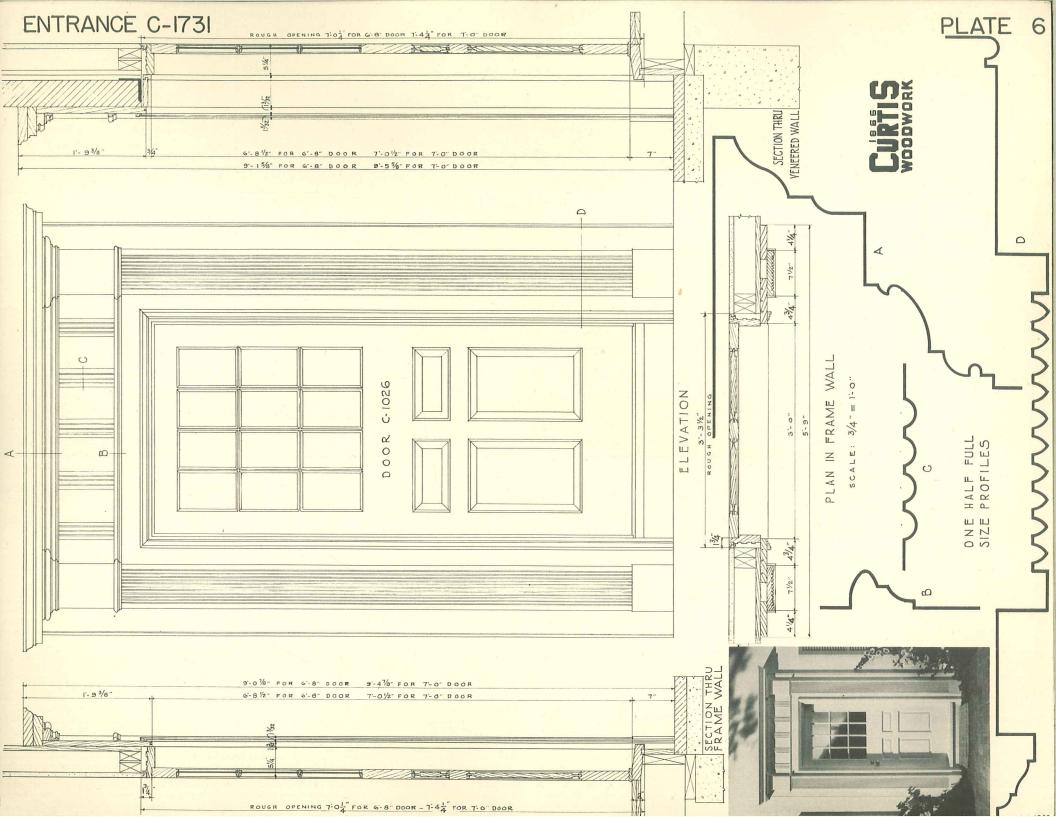


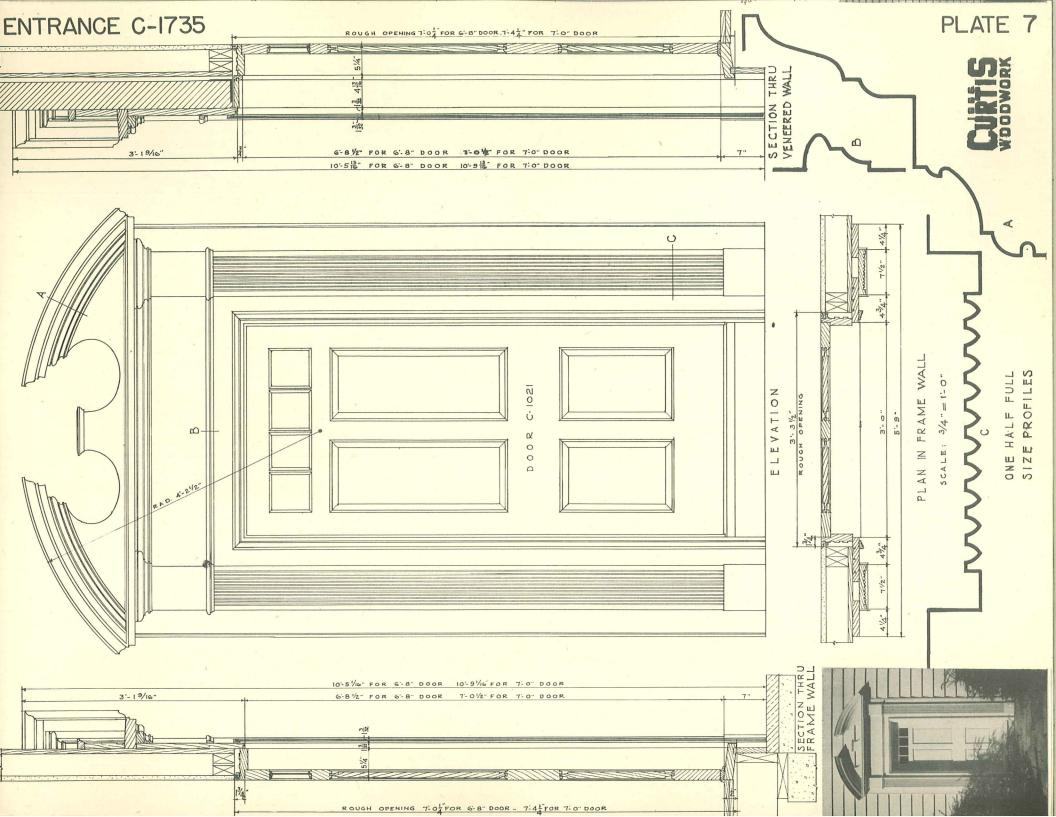


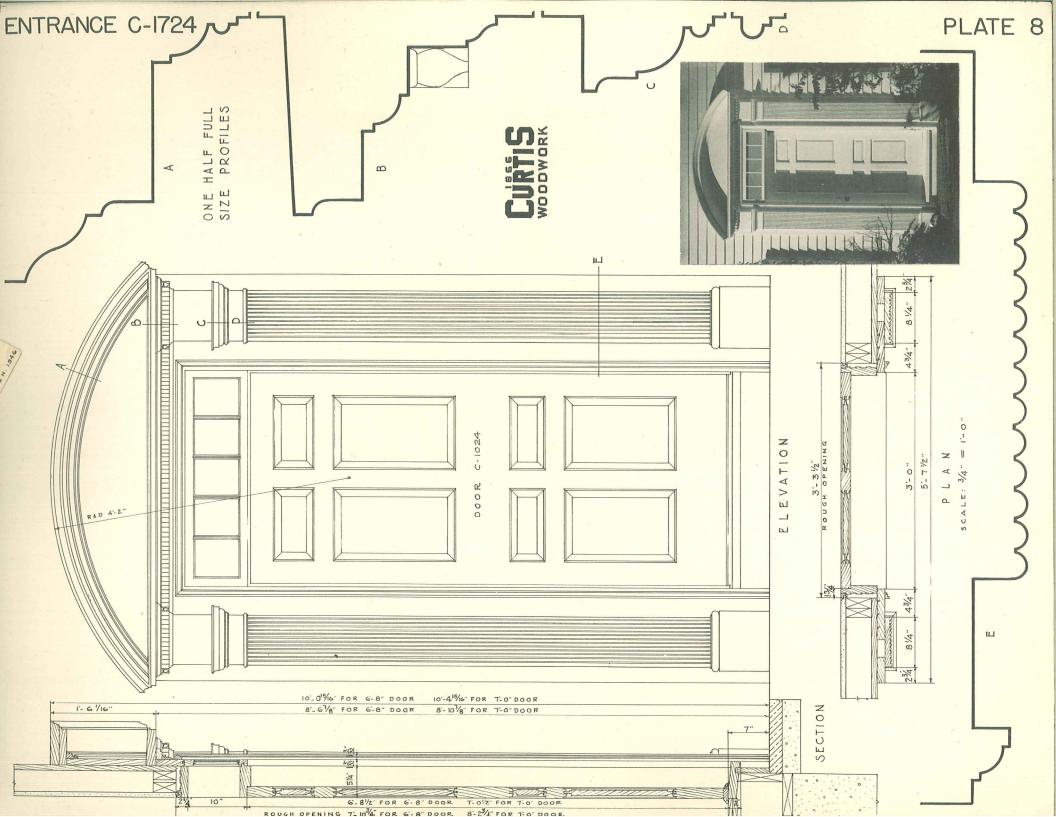


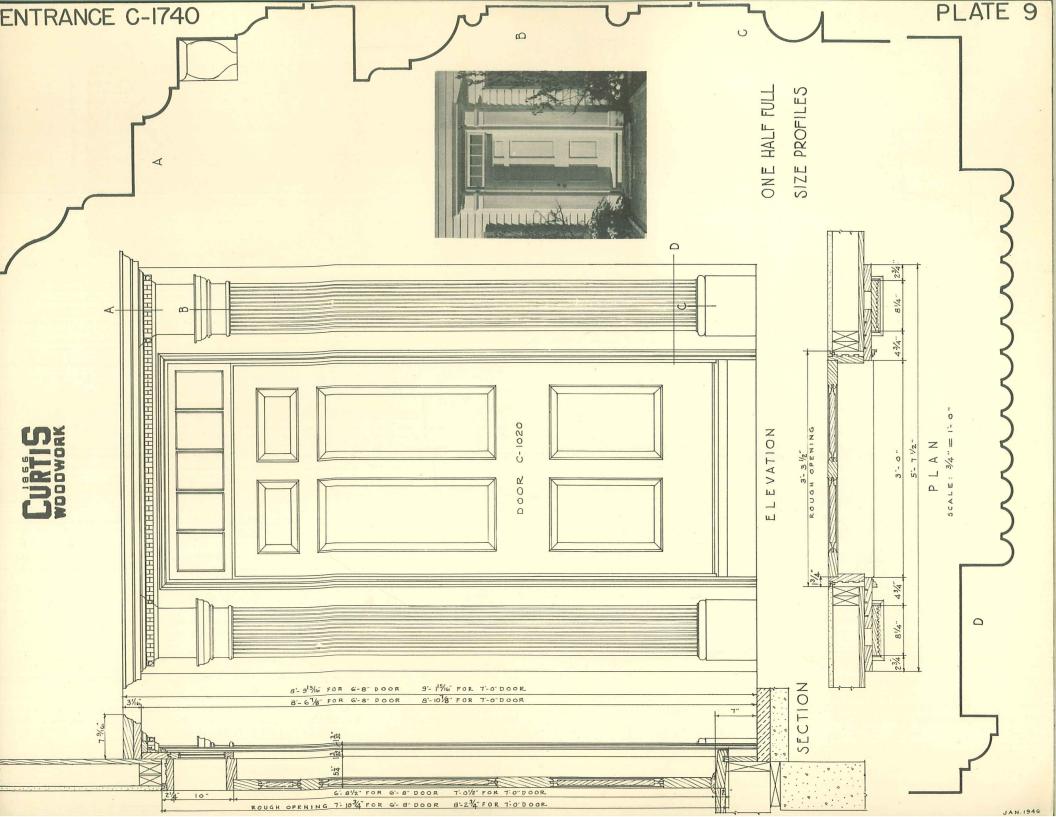


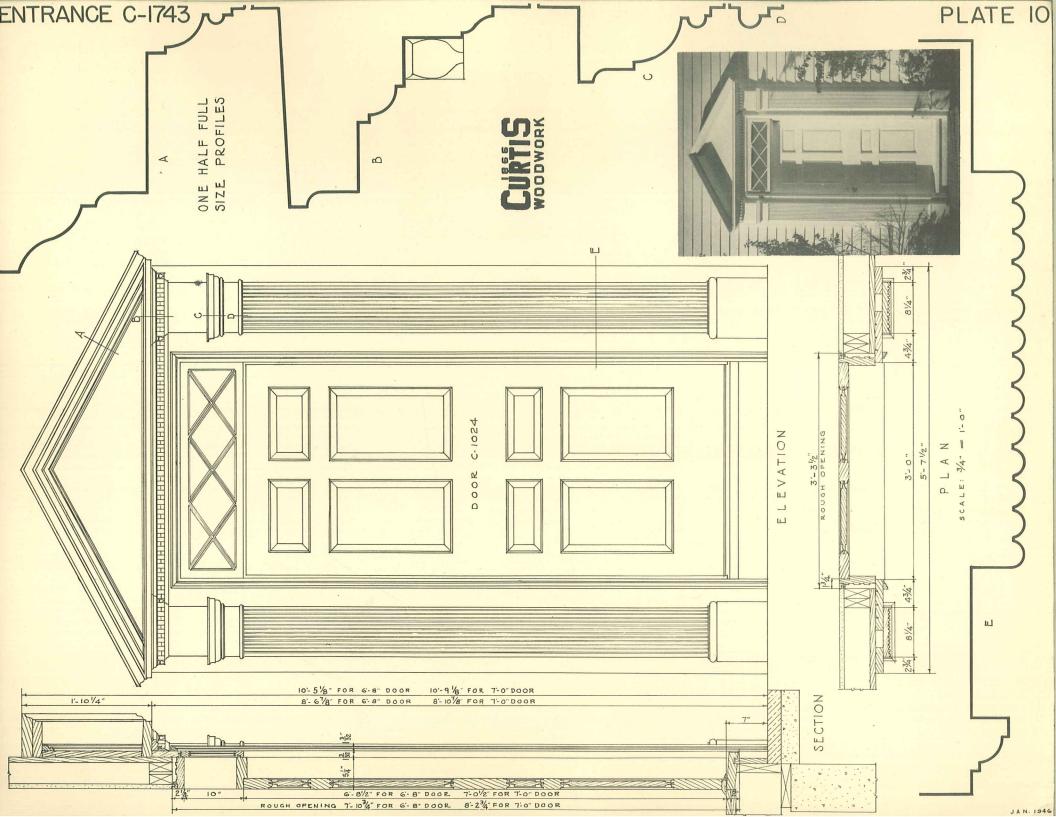


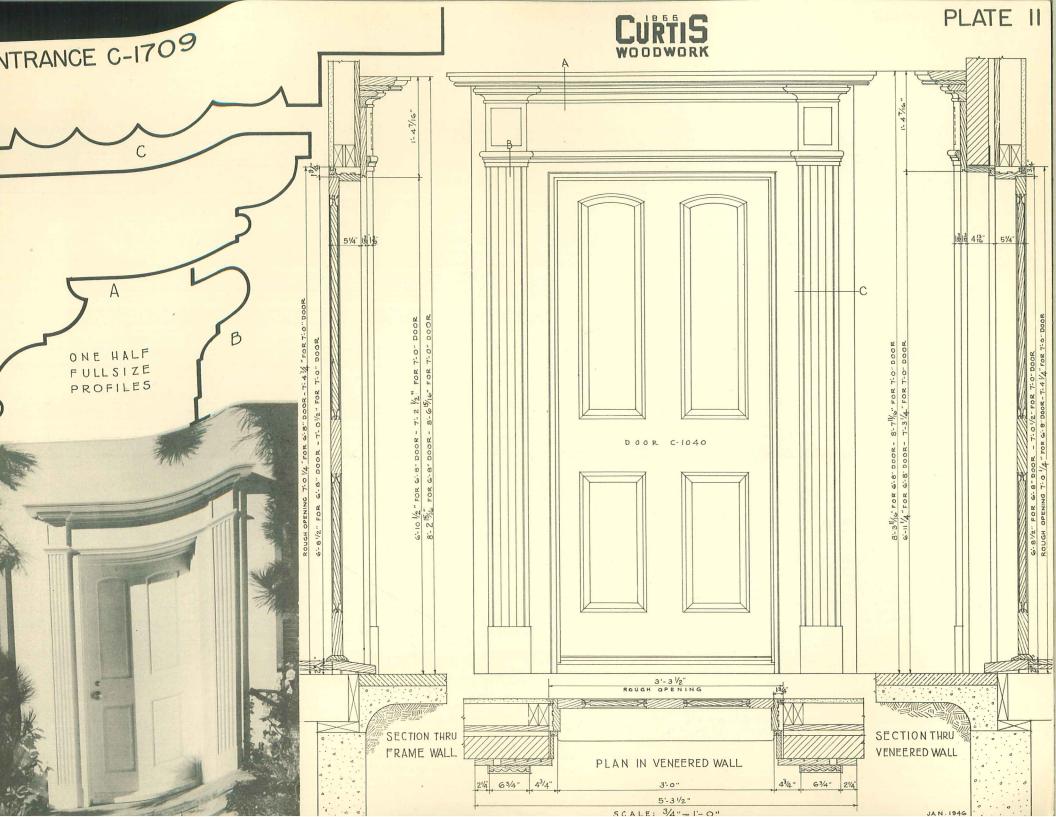

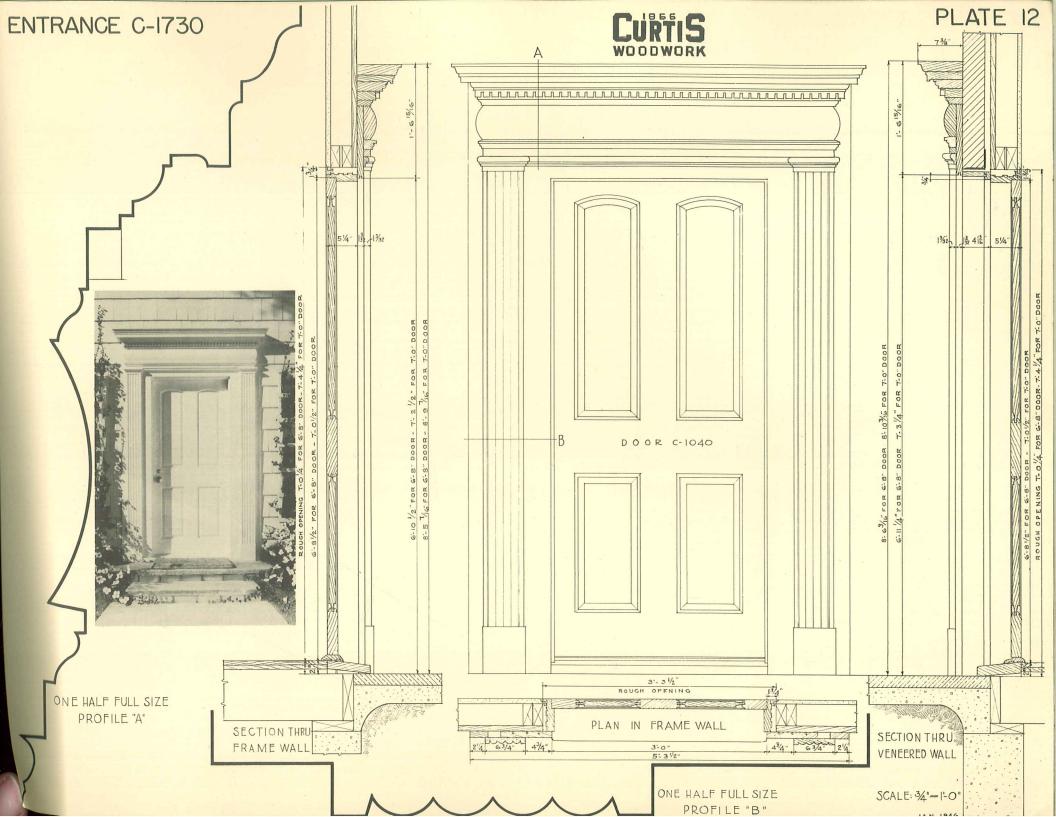


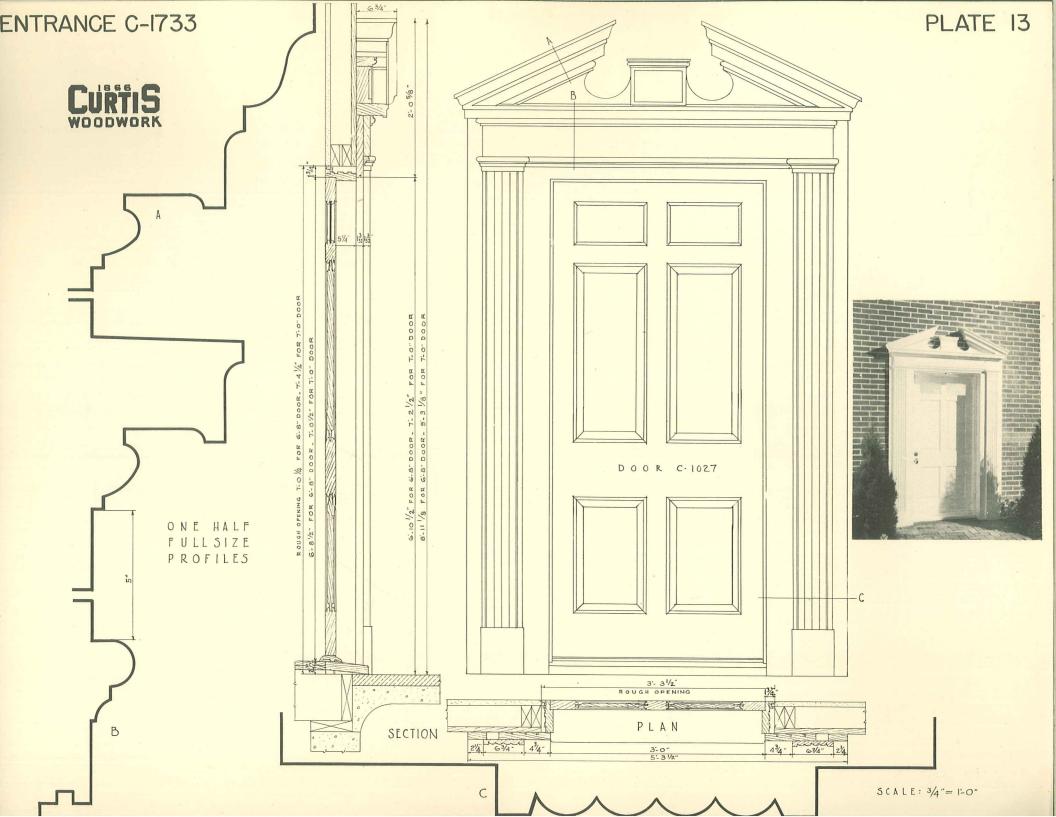


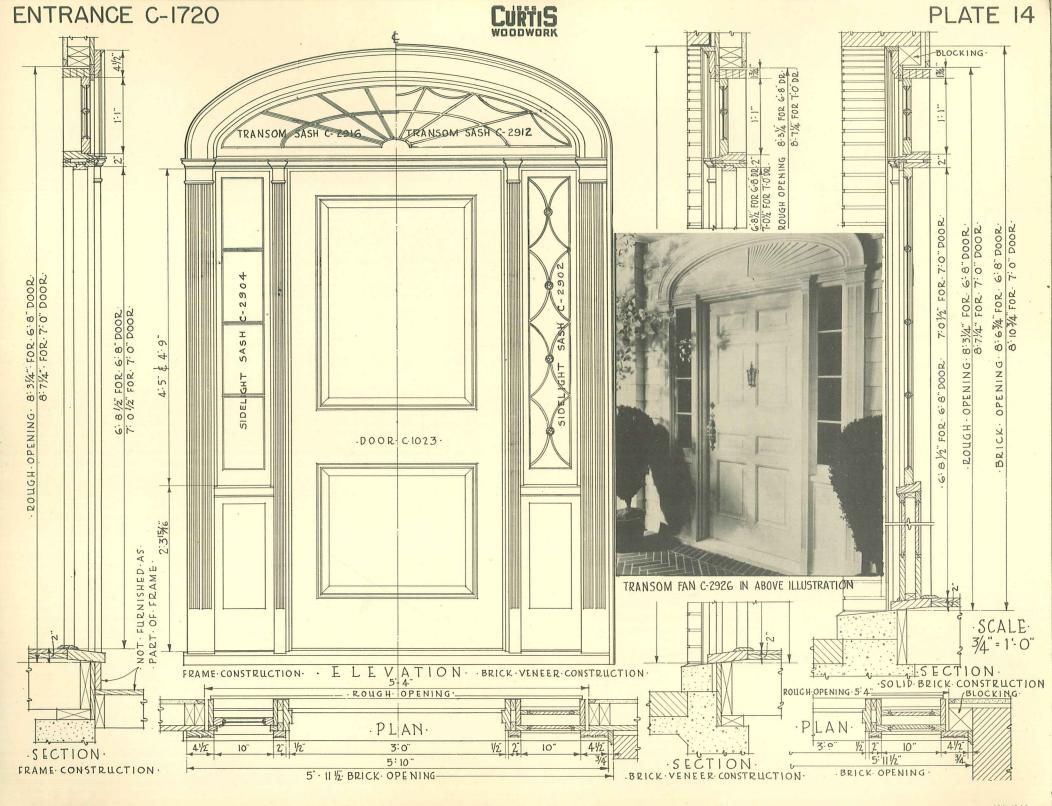


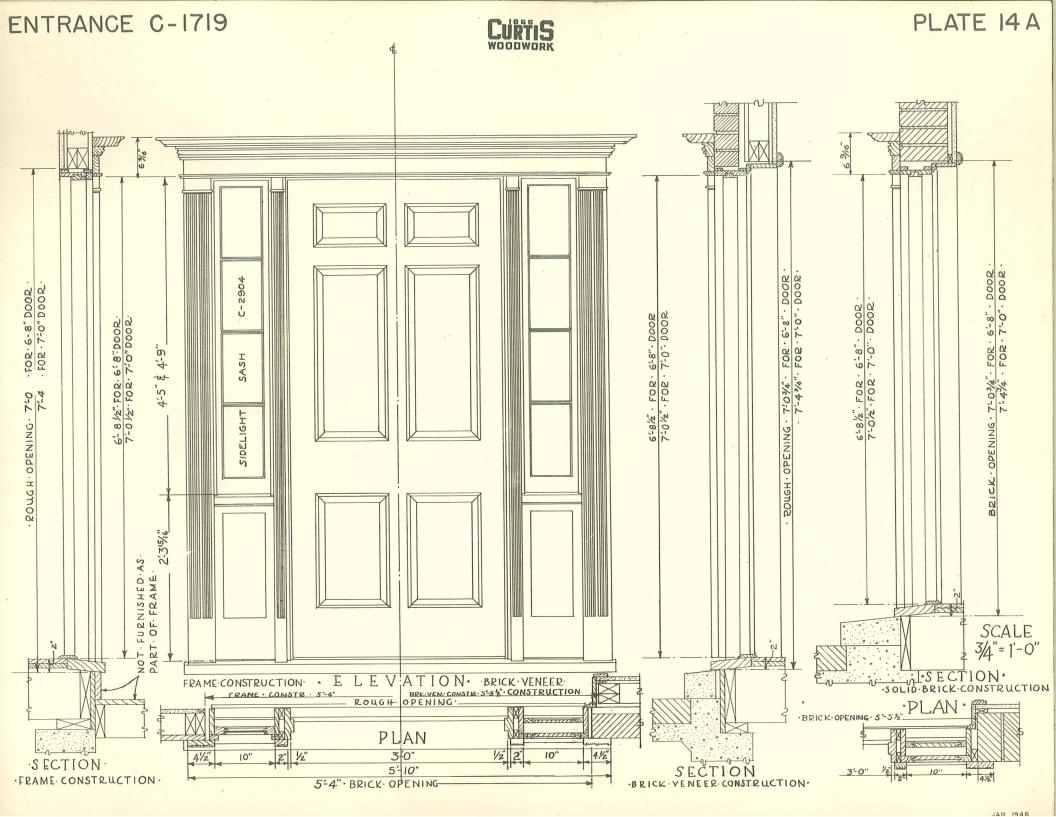





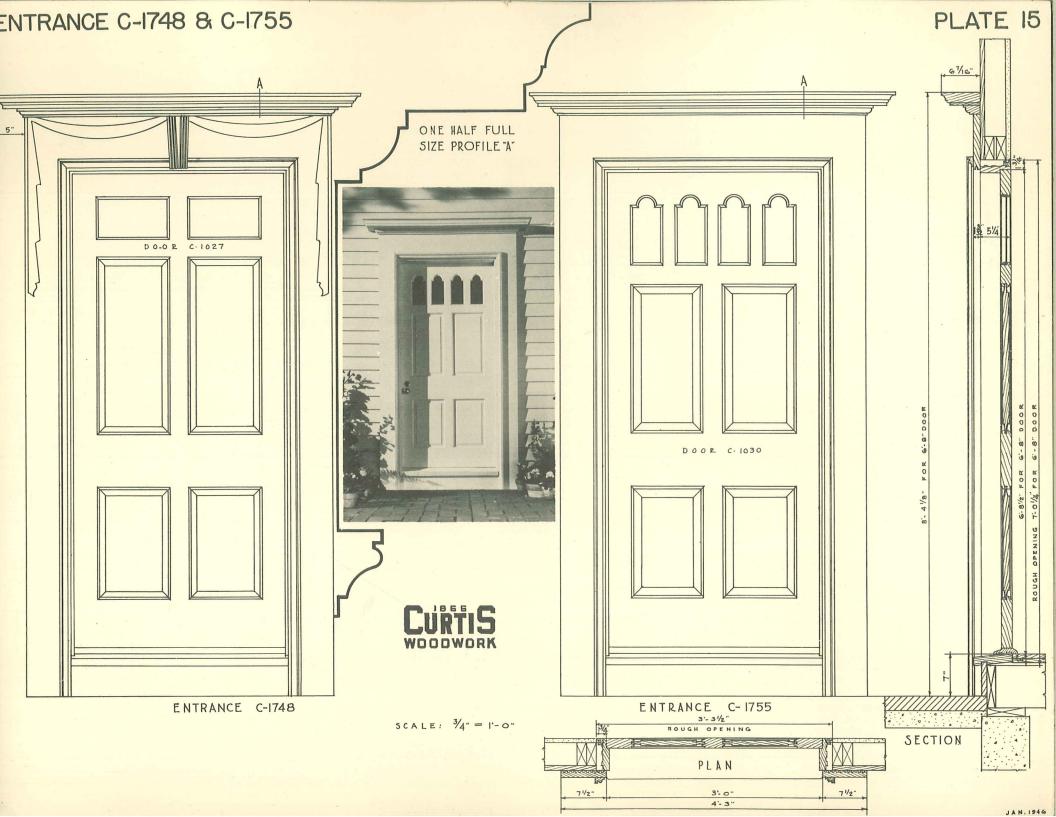


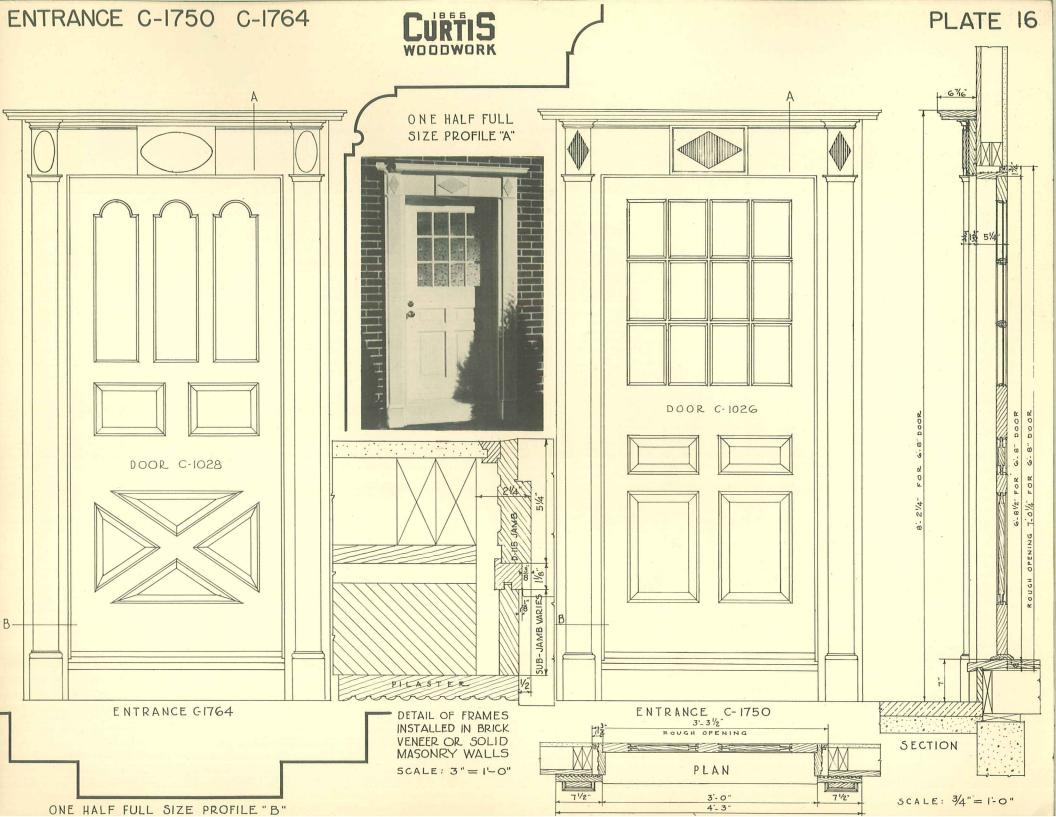


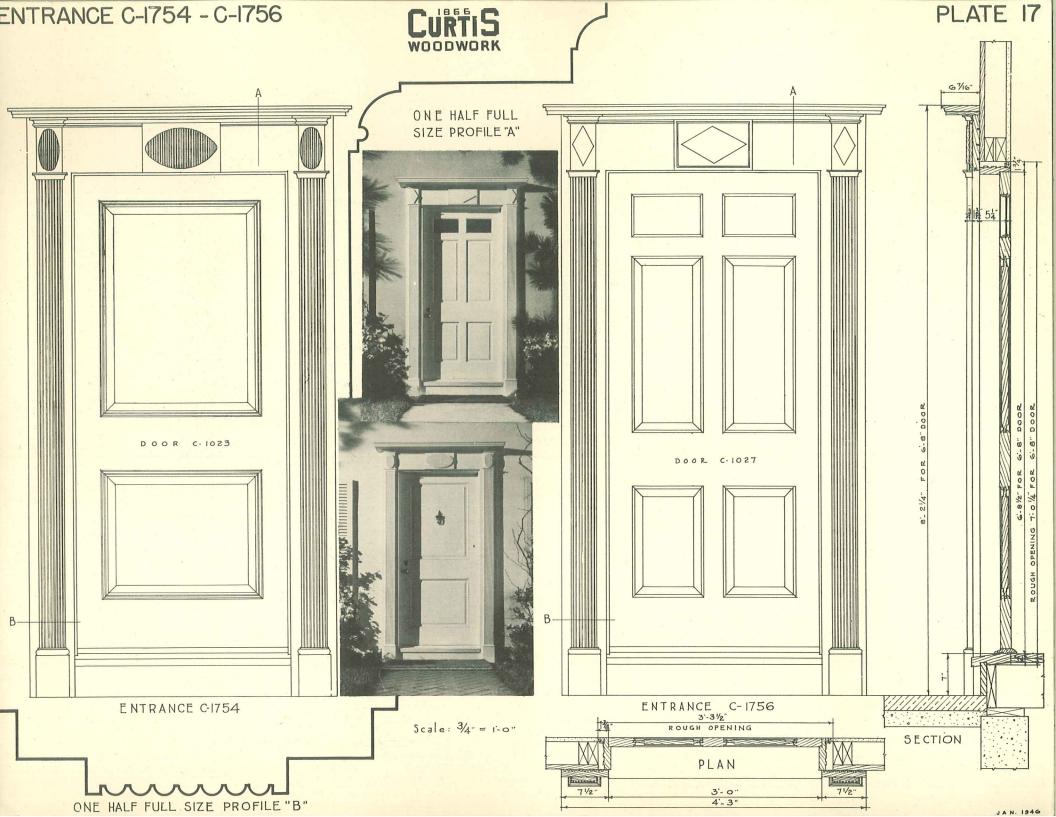


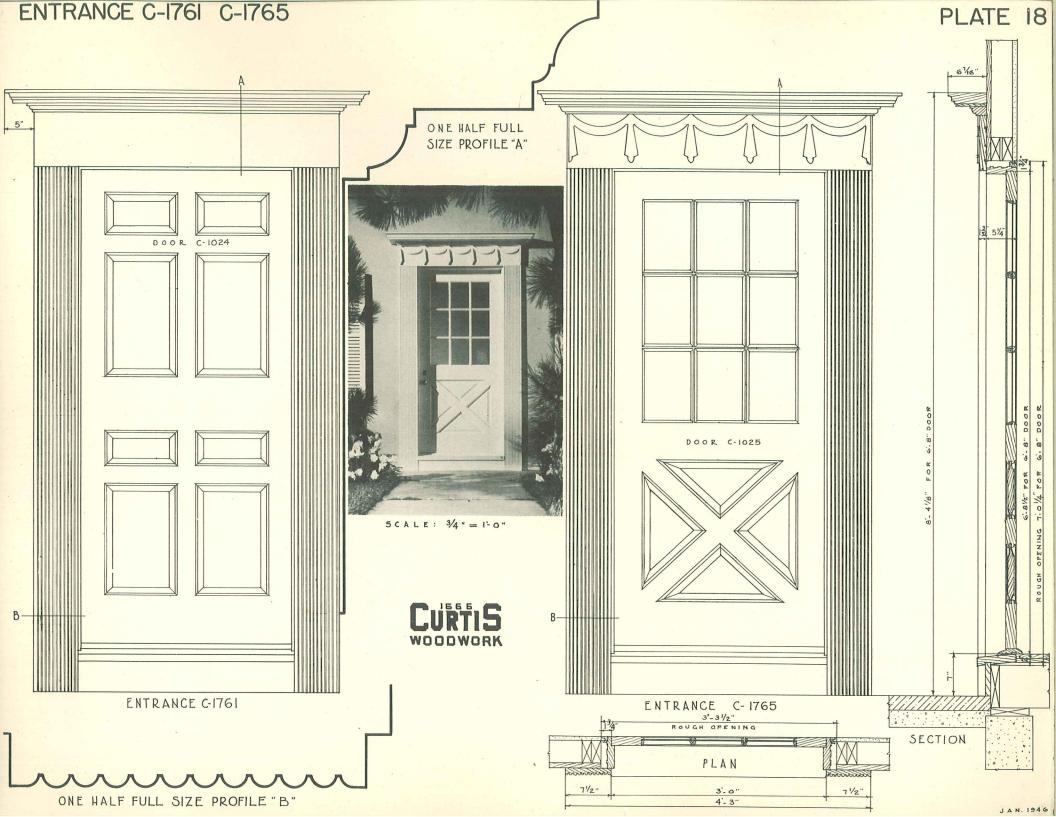


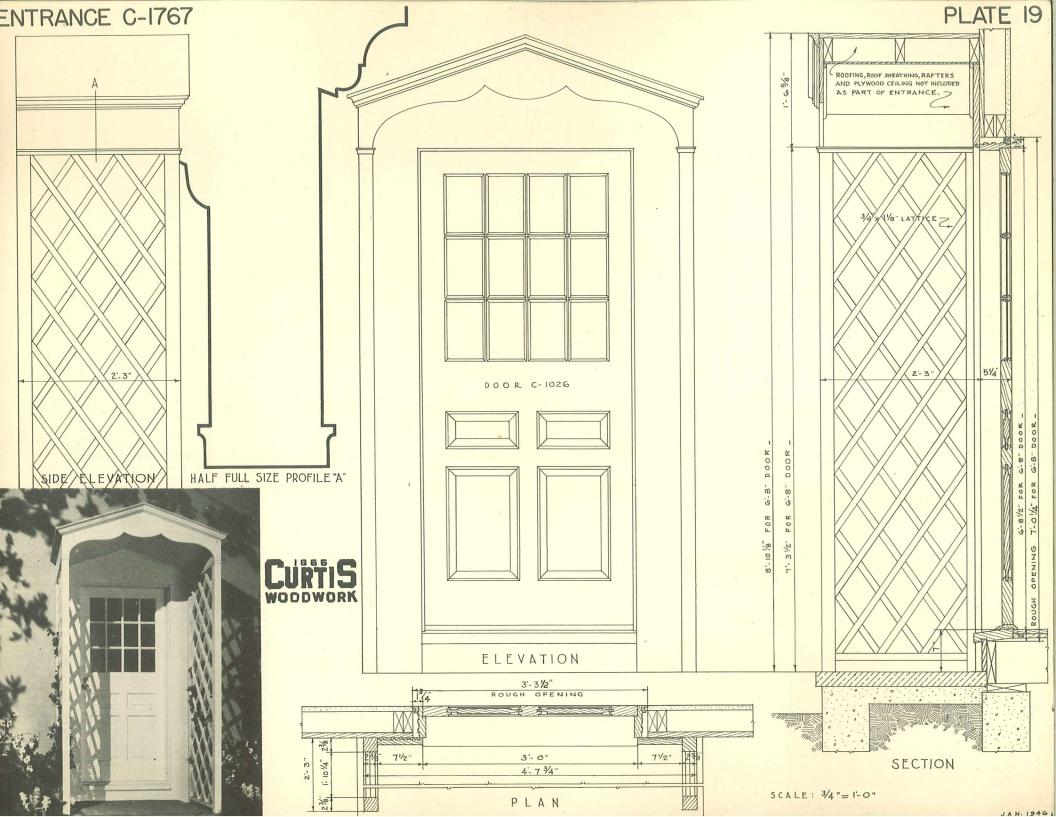


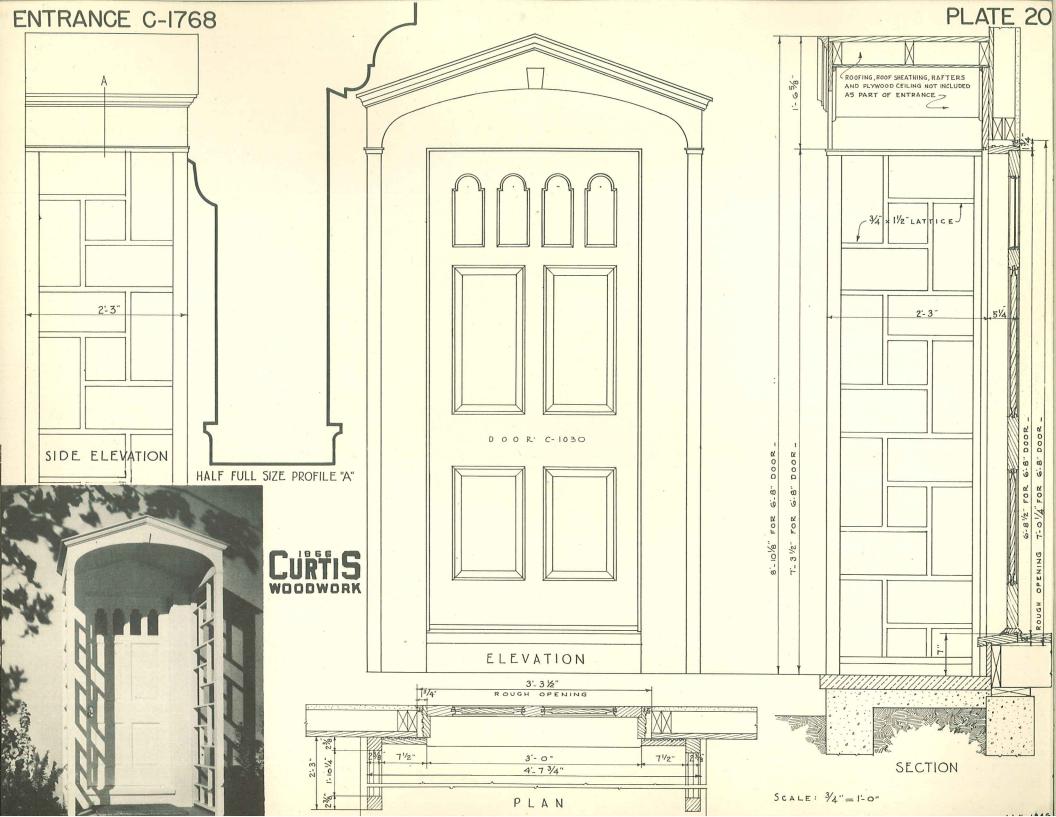

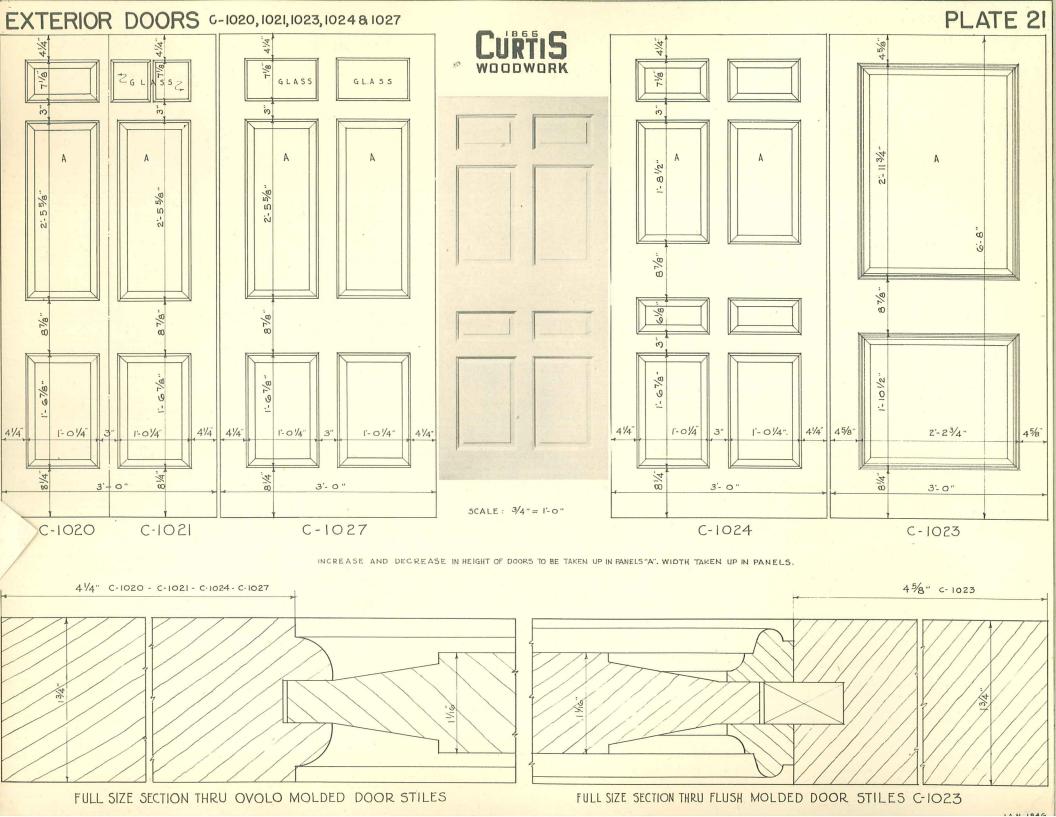


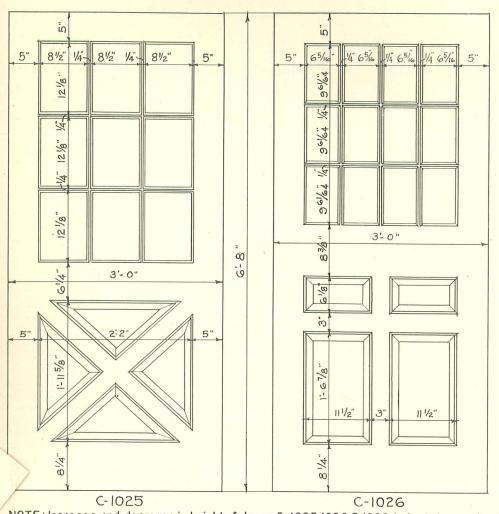

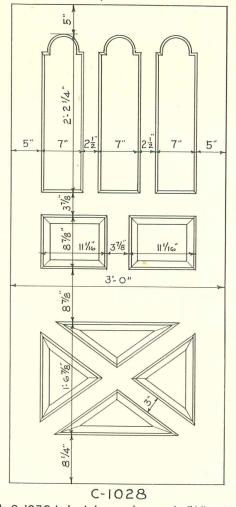


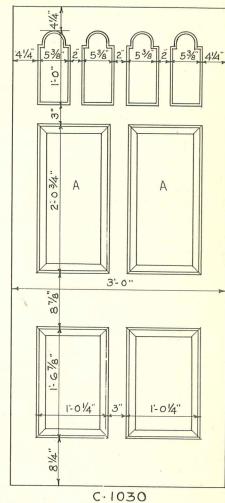


NOTE: Increase and decrease in height of doors C-1025,1026 & 1028 to be taken up in glass. In C-1030 to be taken up in panels "A". Width to be taken up in panels and glass.

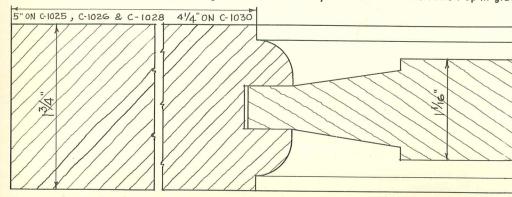

F. S. SECTION THROUGH DOOR STILES





F. S. MUNTIN C-1025 & C-1026




F. S. MUNTIN GIOZ8 & GIO30


SCALE: 3/4"=1-0"

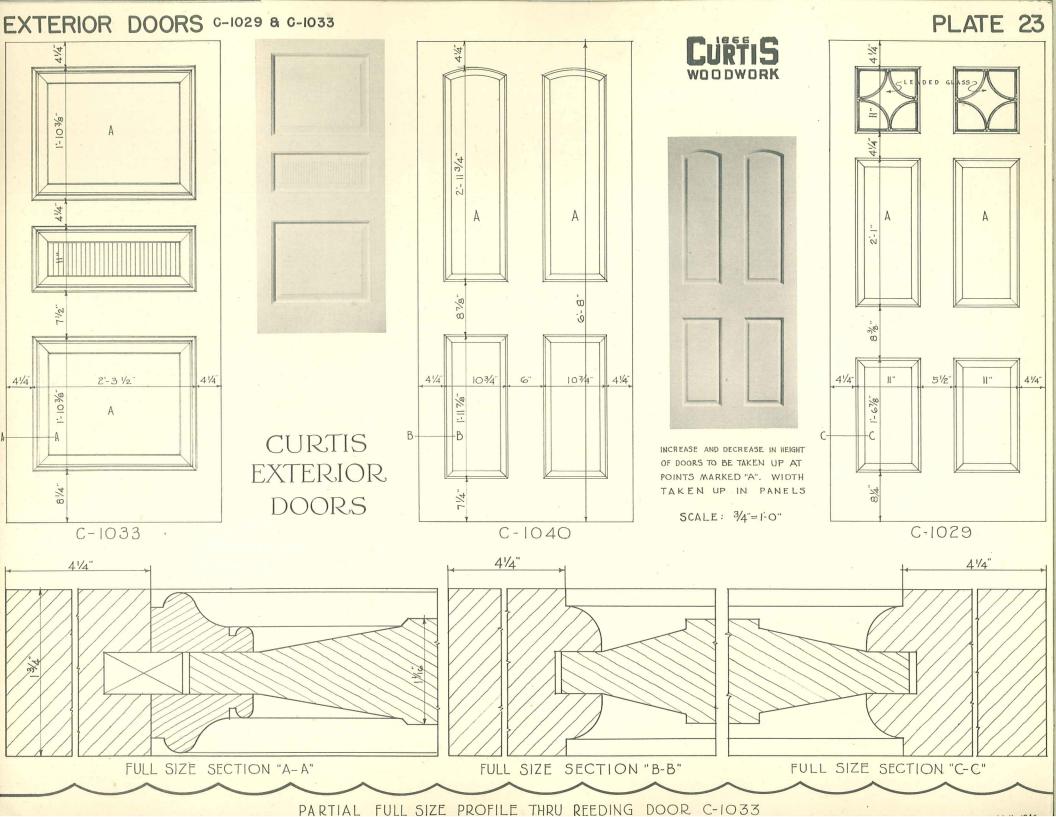

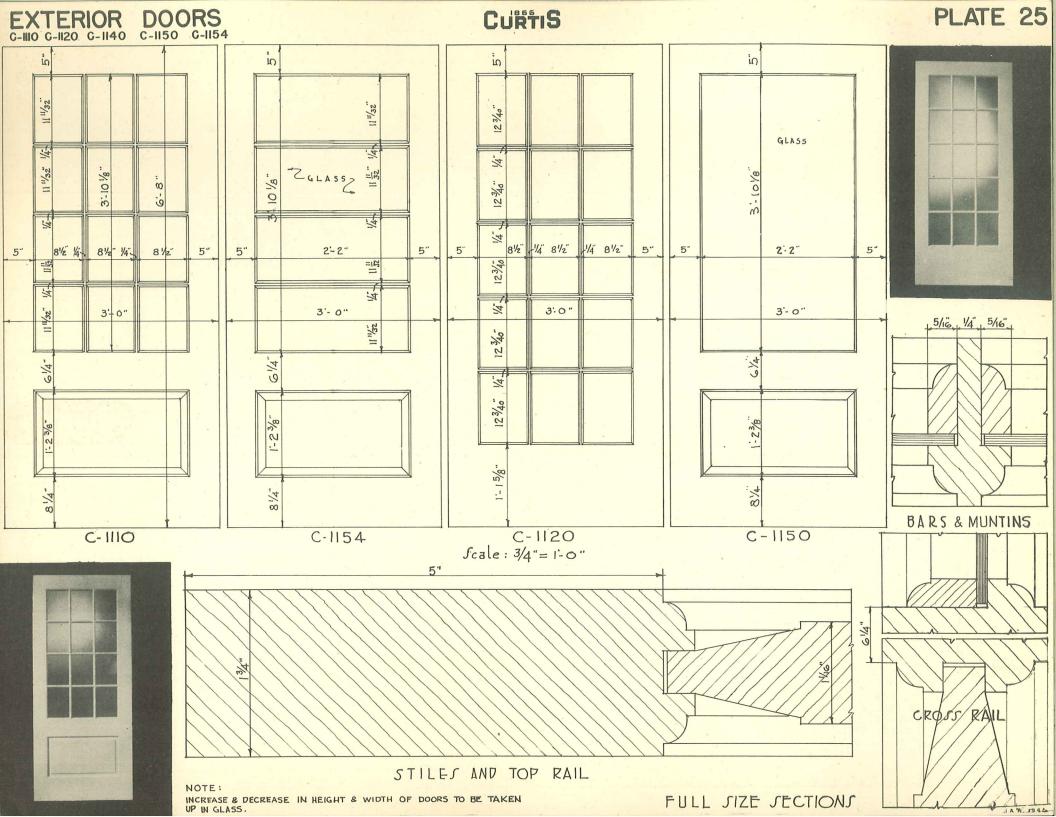

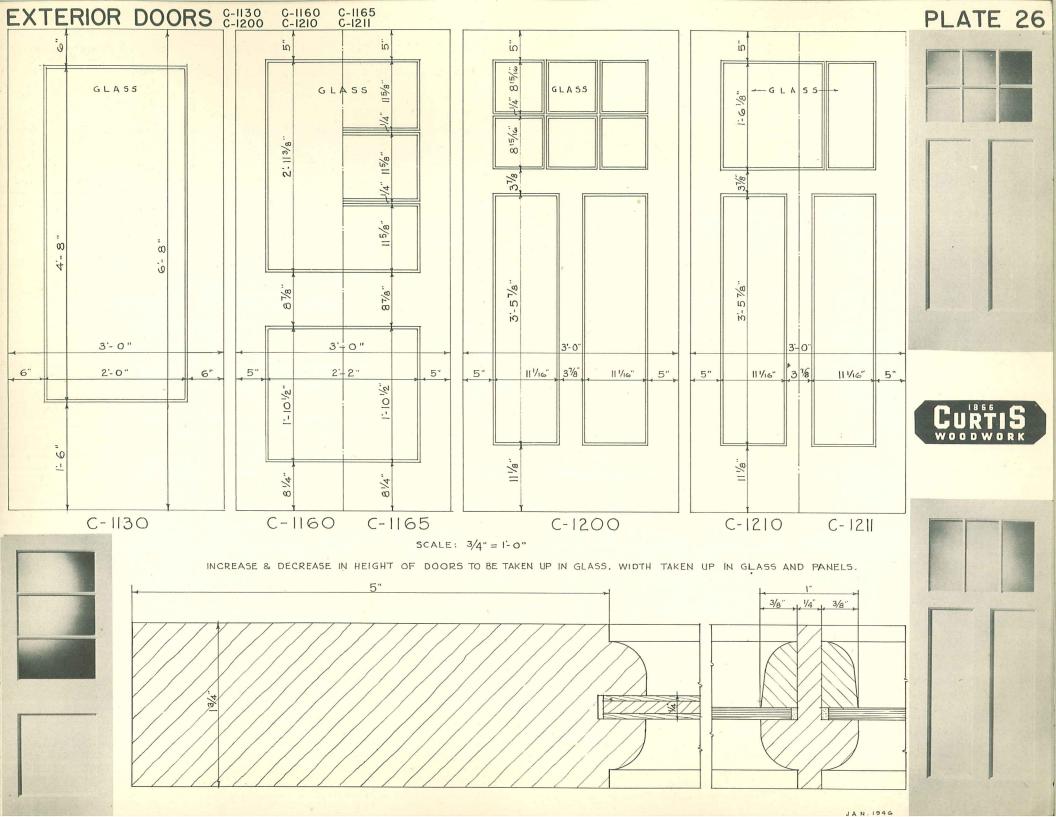



G-1230 G-1233 G-1239 G-1240

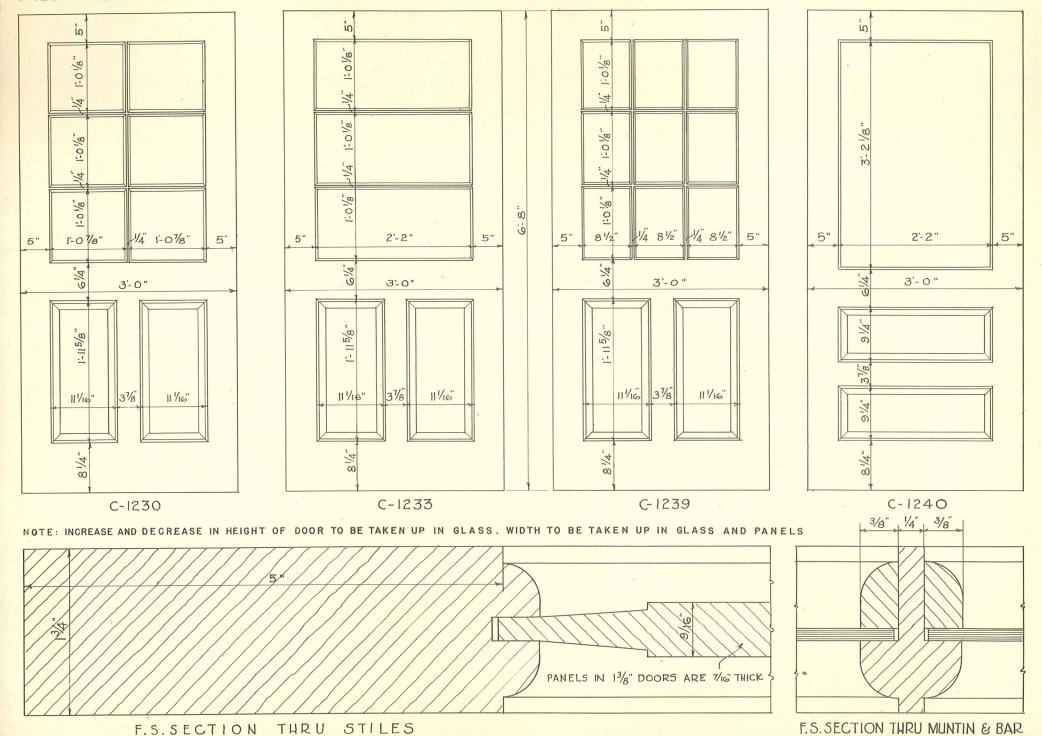



SCALE: 3/4" = 1-0"


JAN. 1946

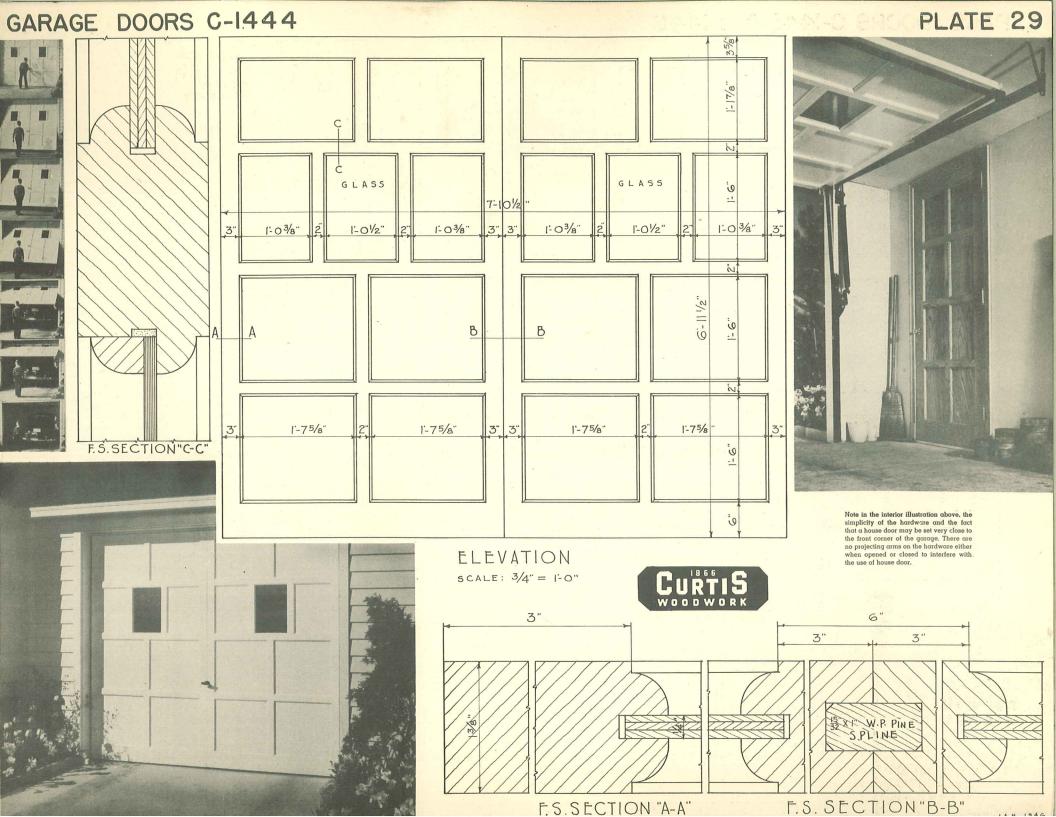


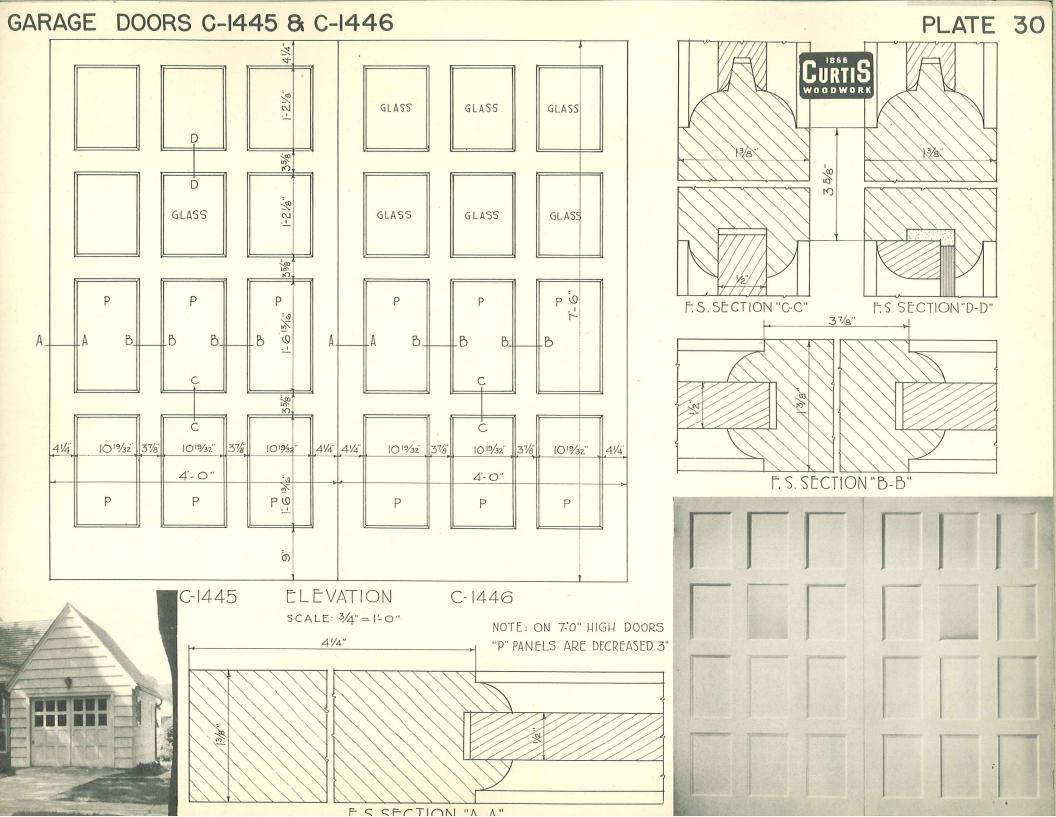

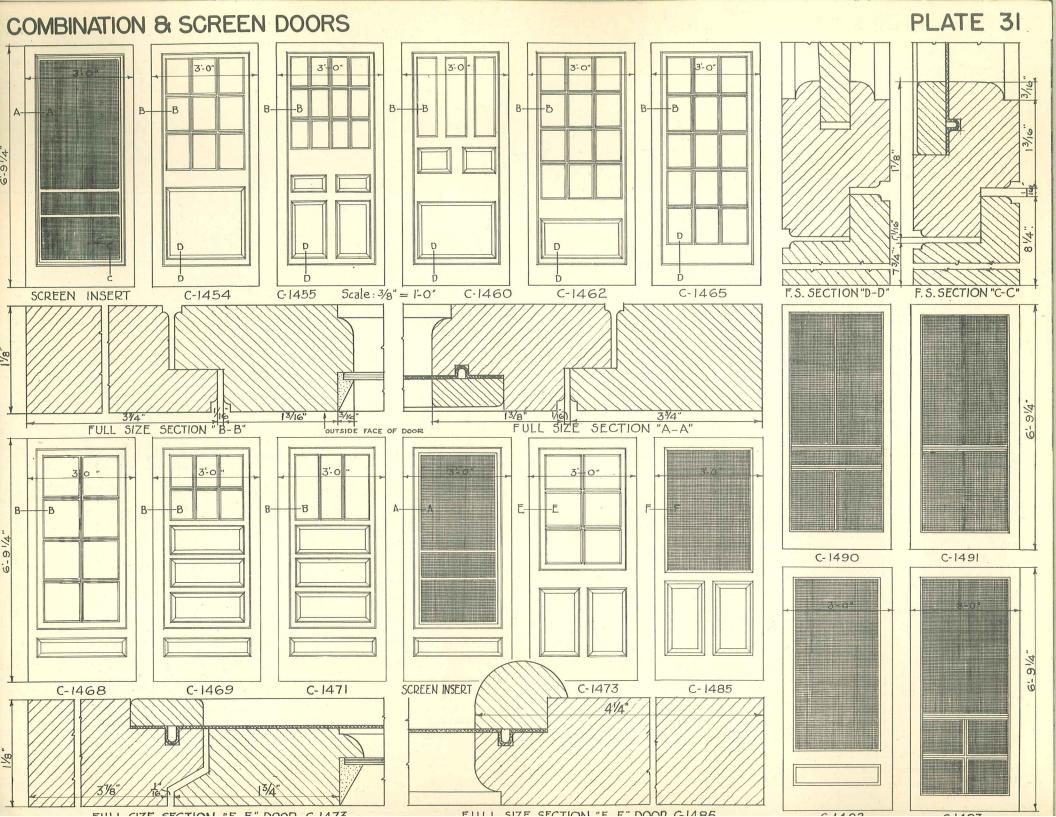

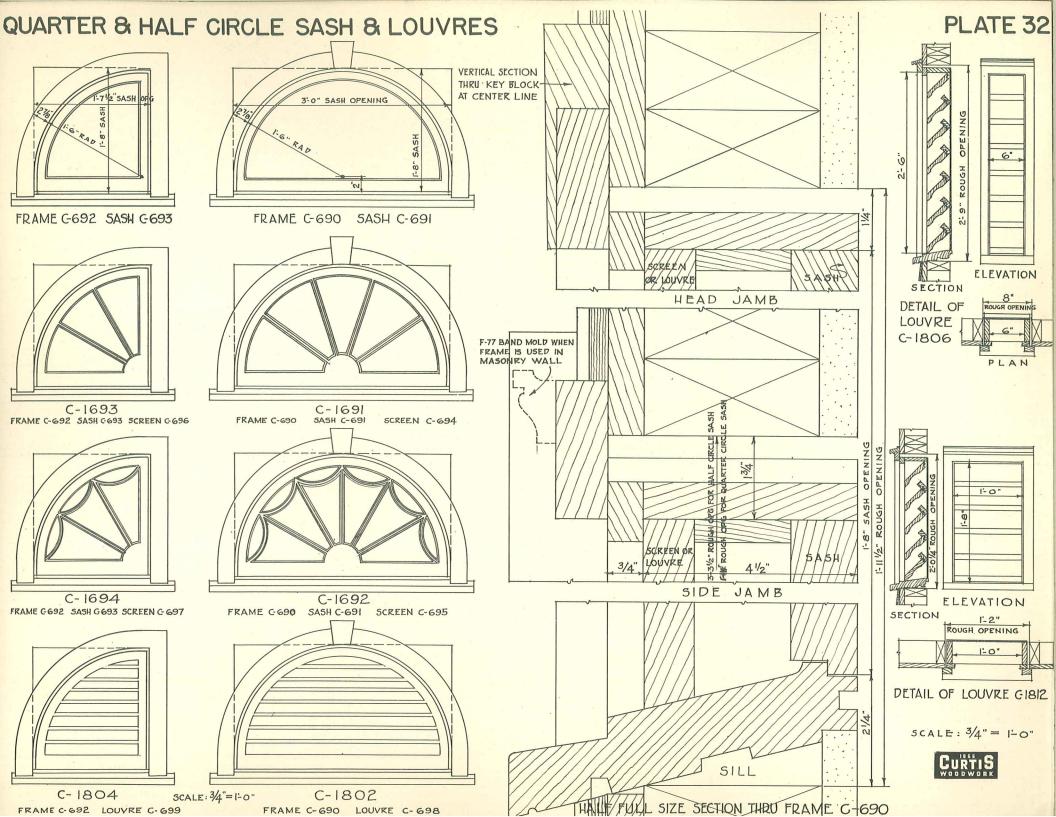

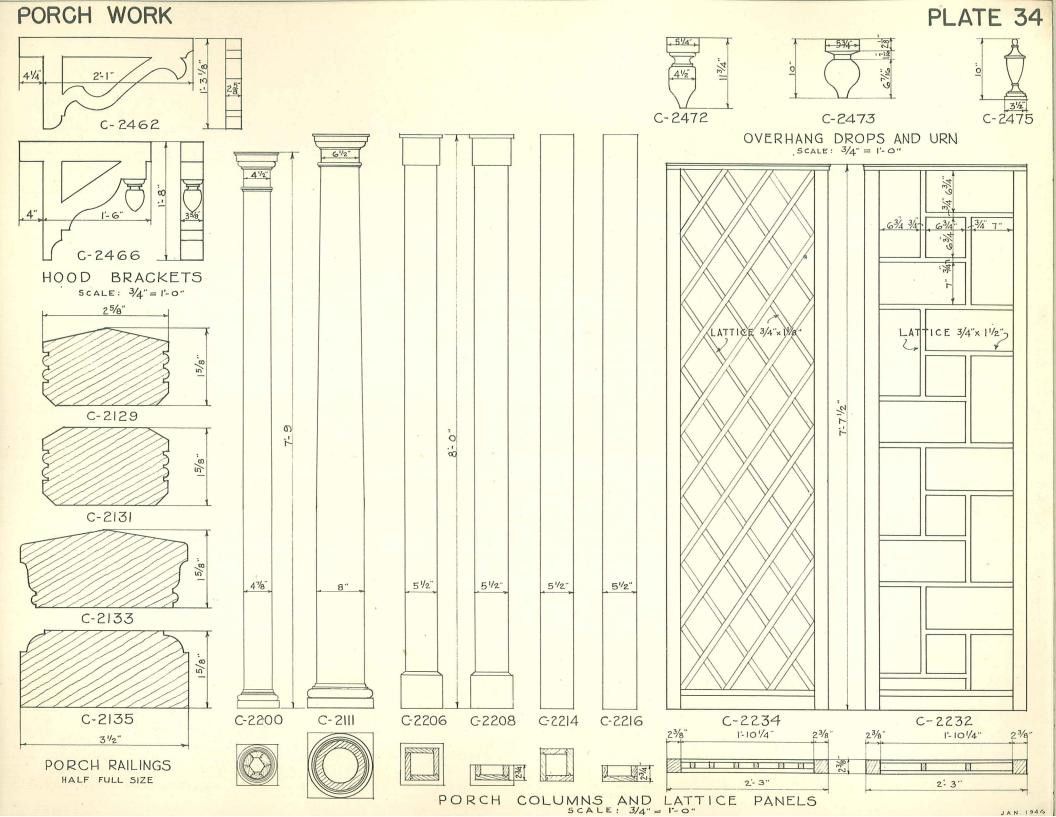

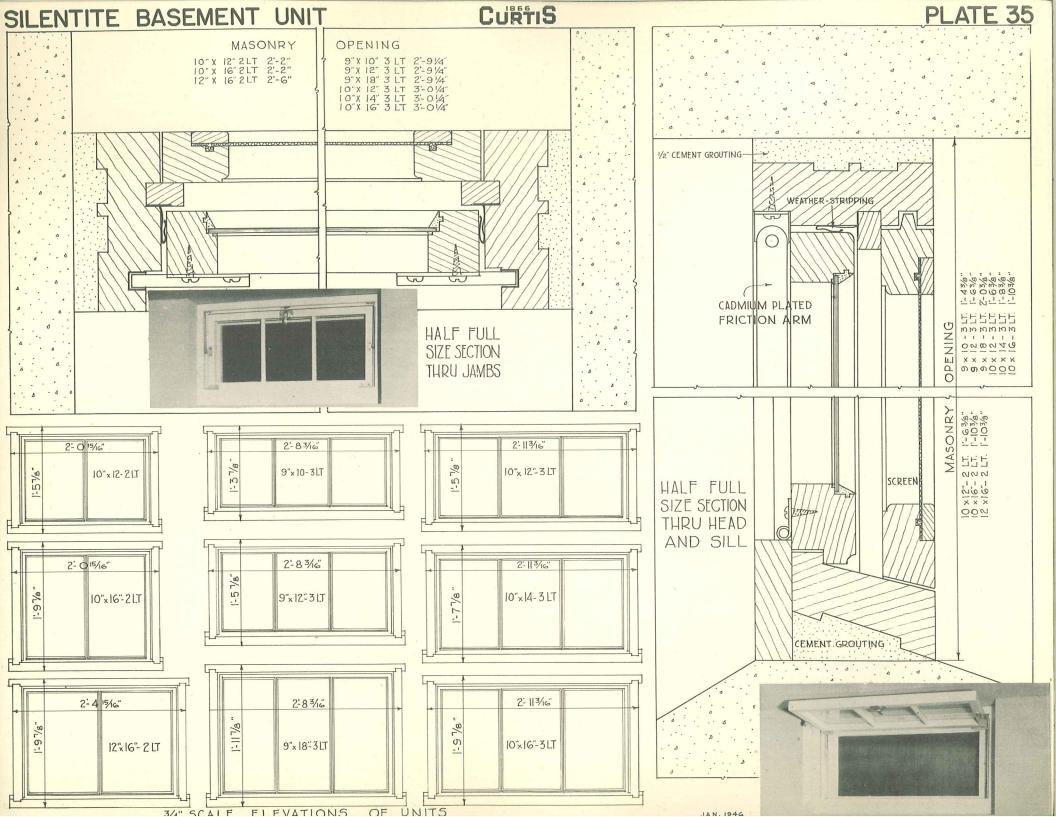





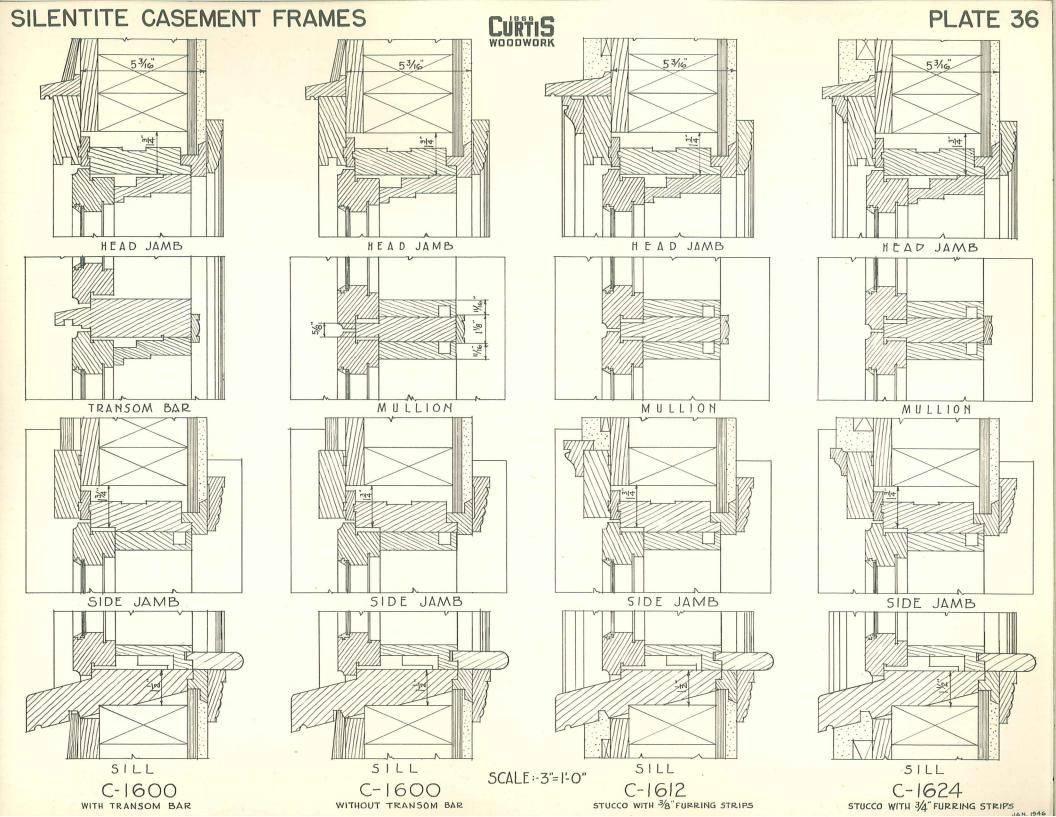


PLATE 37

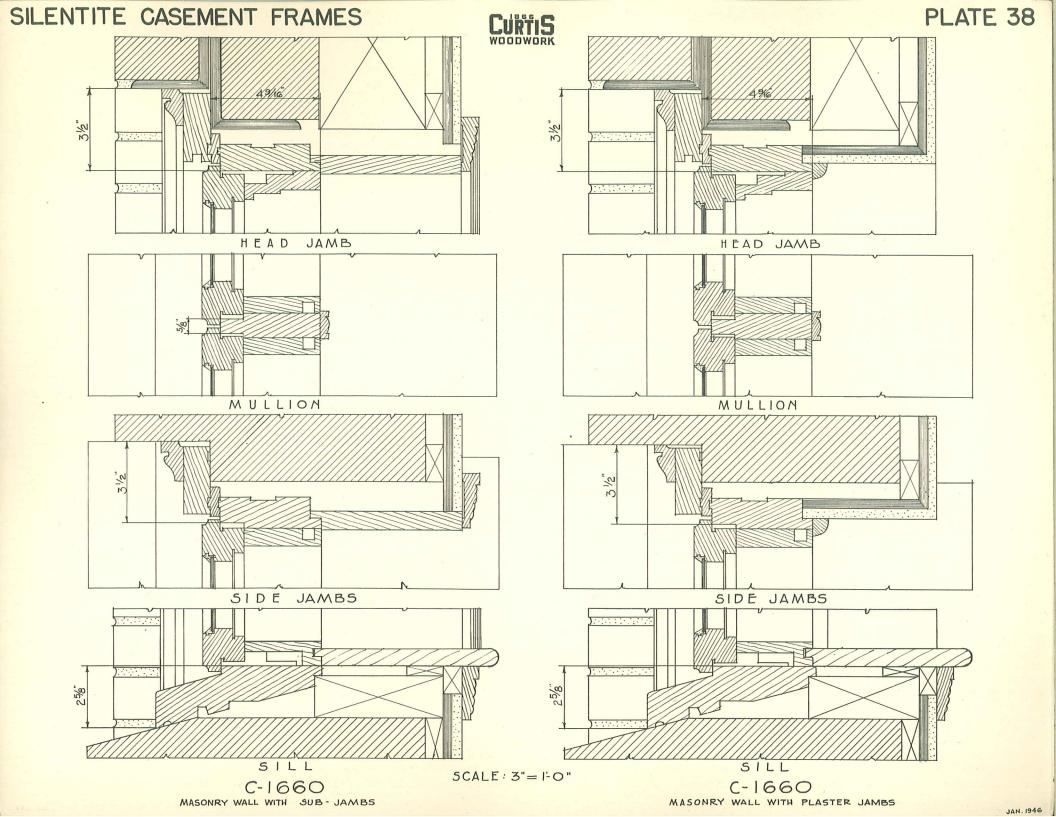


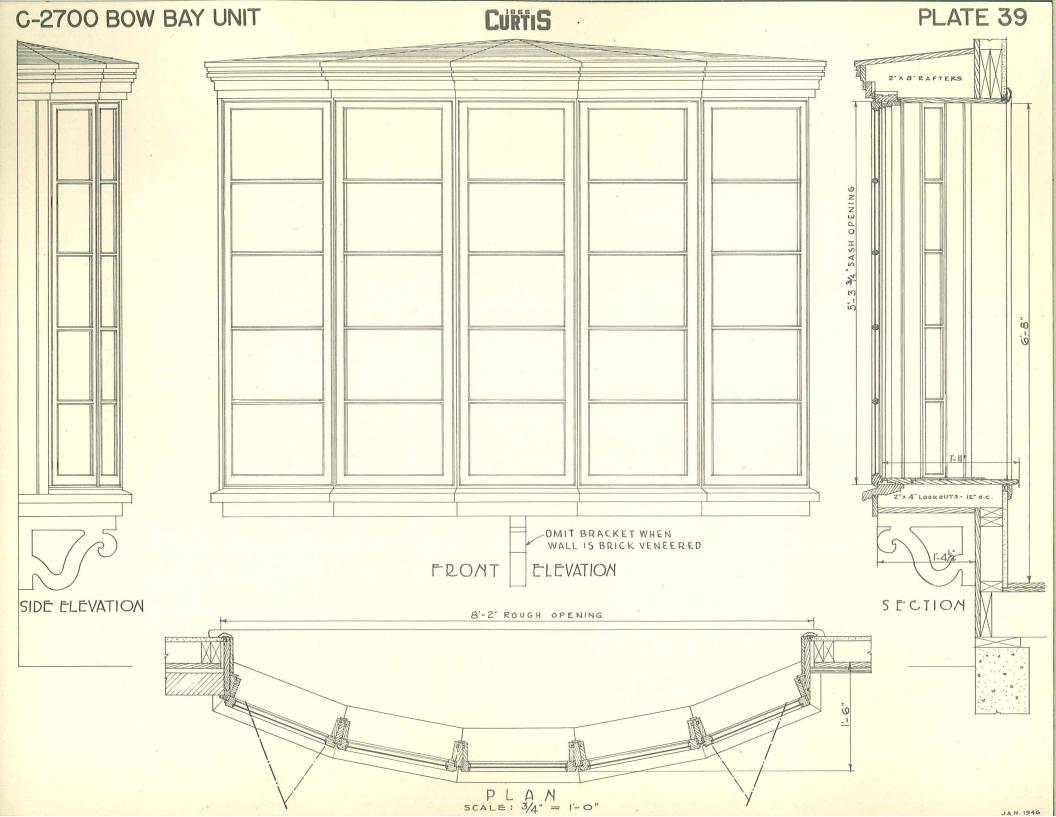


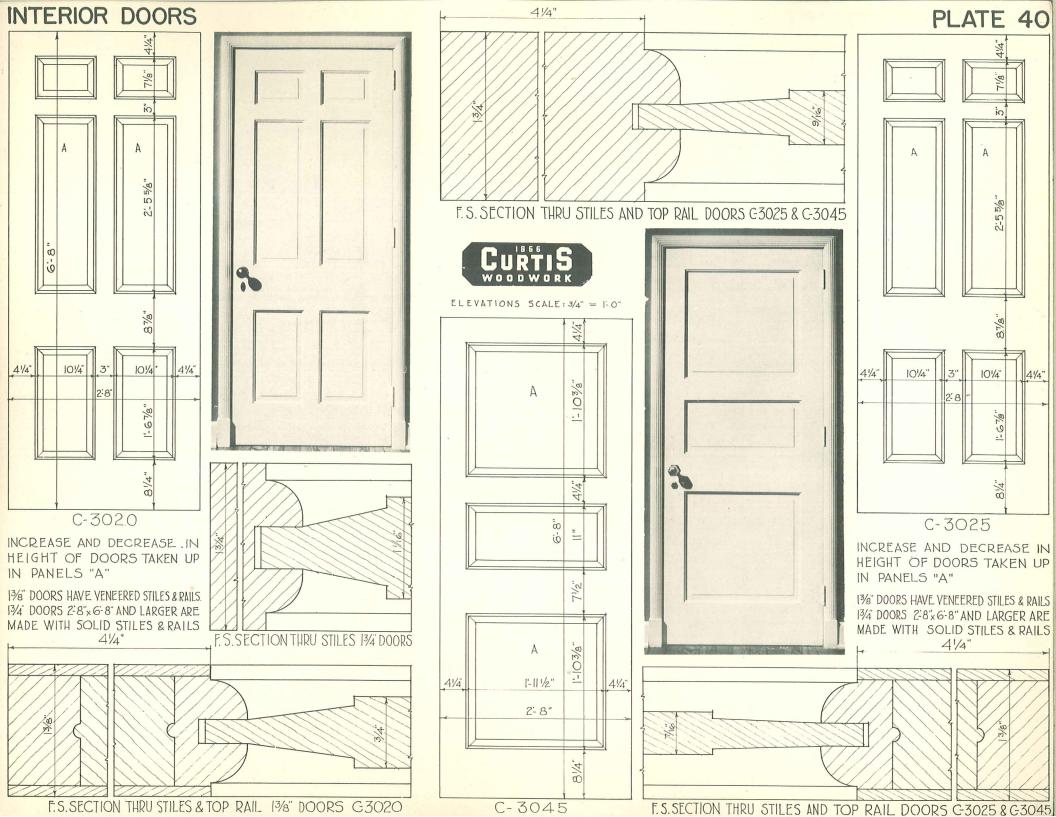


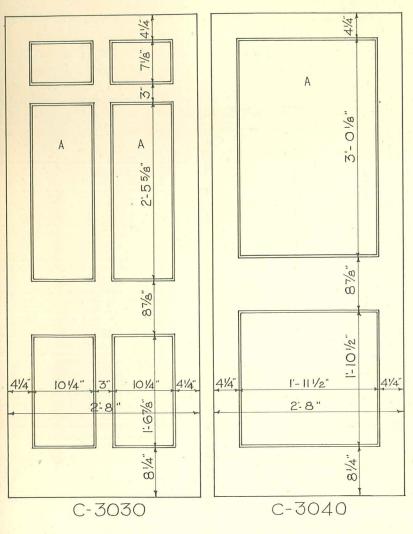


Cuintis

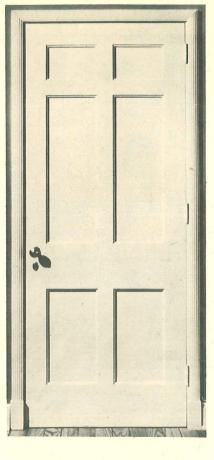

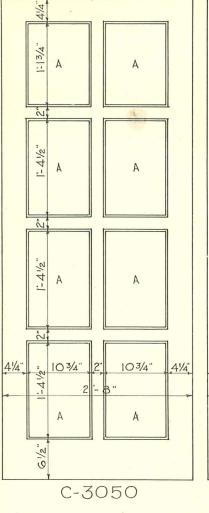

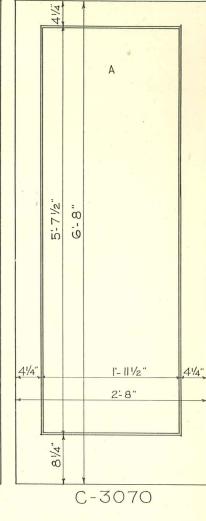


SCALE : 3/4" = 1'-0"

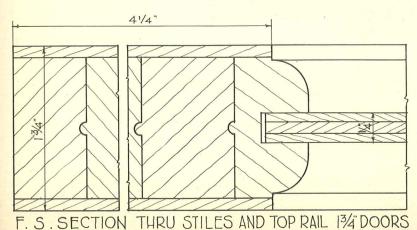

INCREASE AND DECREASE IN HEIGHT OF DOORS TAKEN UP IN PANELS MARKED "A"

13/4" DOORS HAVE VENEERED MUNTINS, STILES, TOP AND BOTTOM RAILS.


13/4" DOORS 2-8"x6-8" AND LARGER ARE MADE WITH SOLID STILES AND RAILS

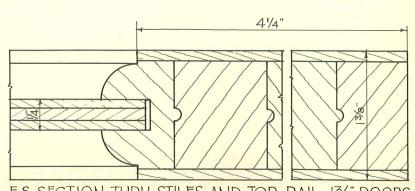



F.S. SECTION THRU STILES AND TOP RAIL 13/8" DOORS


## INTERIOR DOORS


## PLATE 42

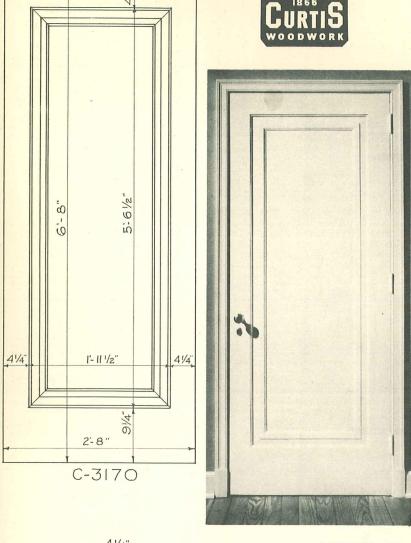


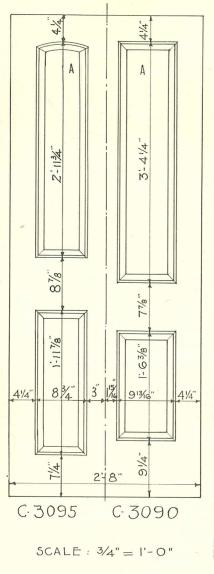


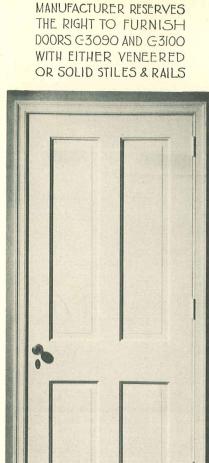

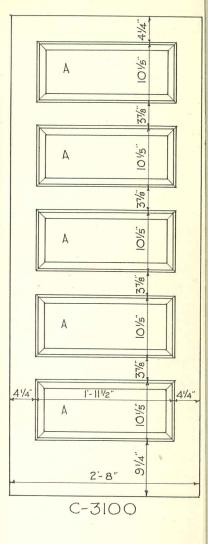


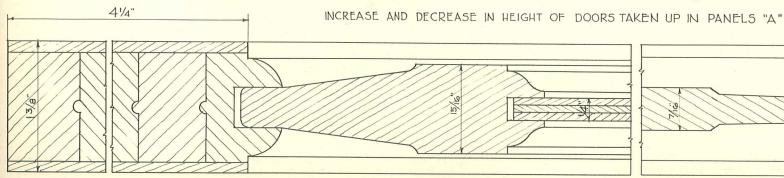





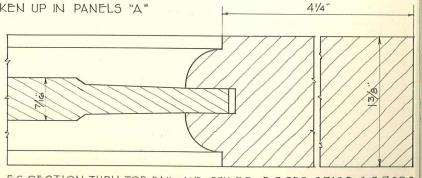



F.S.SECTION THRU TOP RAIL AND STILES DOORS G3100 & G3090 PANELS IN DOOR G3095 ARE 3/4" THICK.

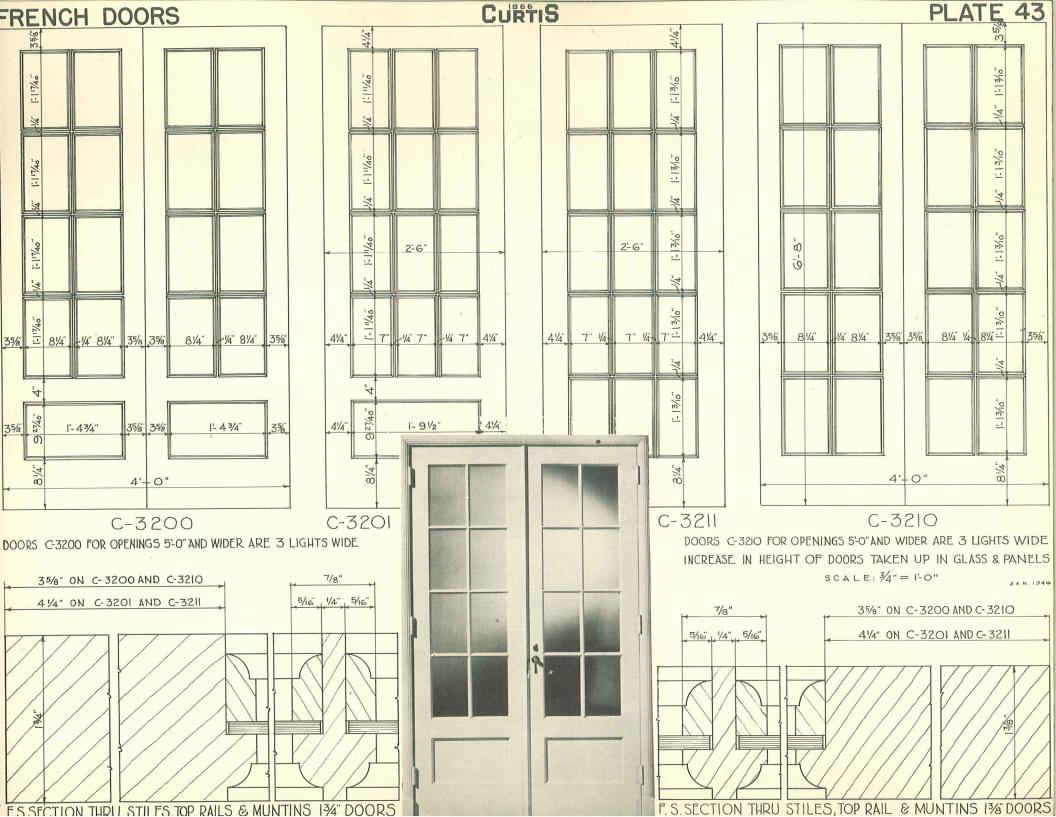


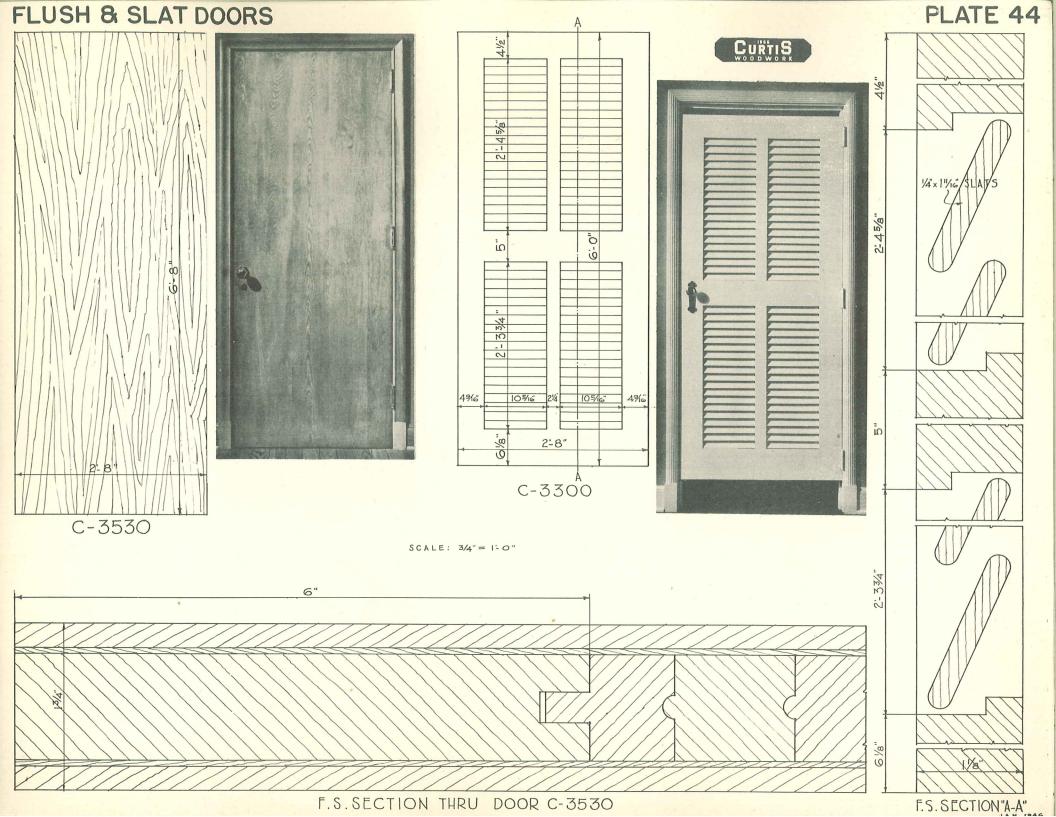


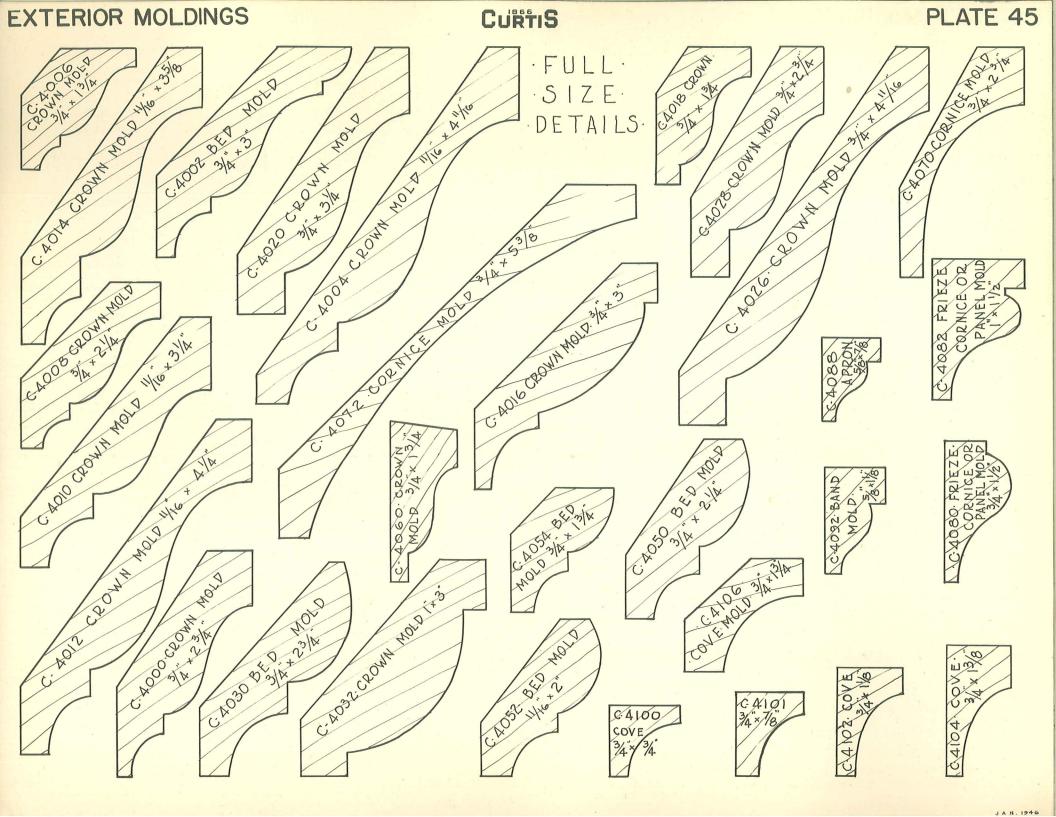


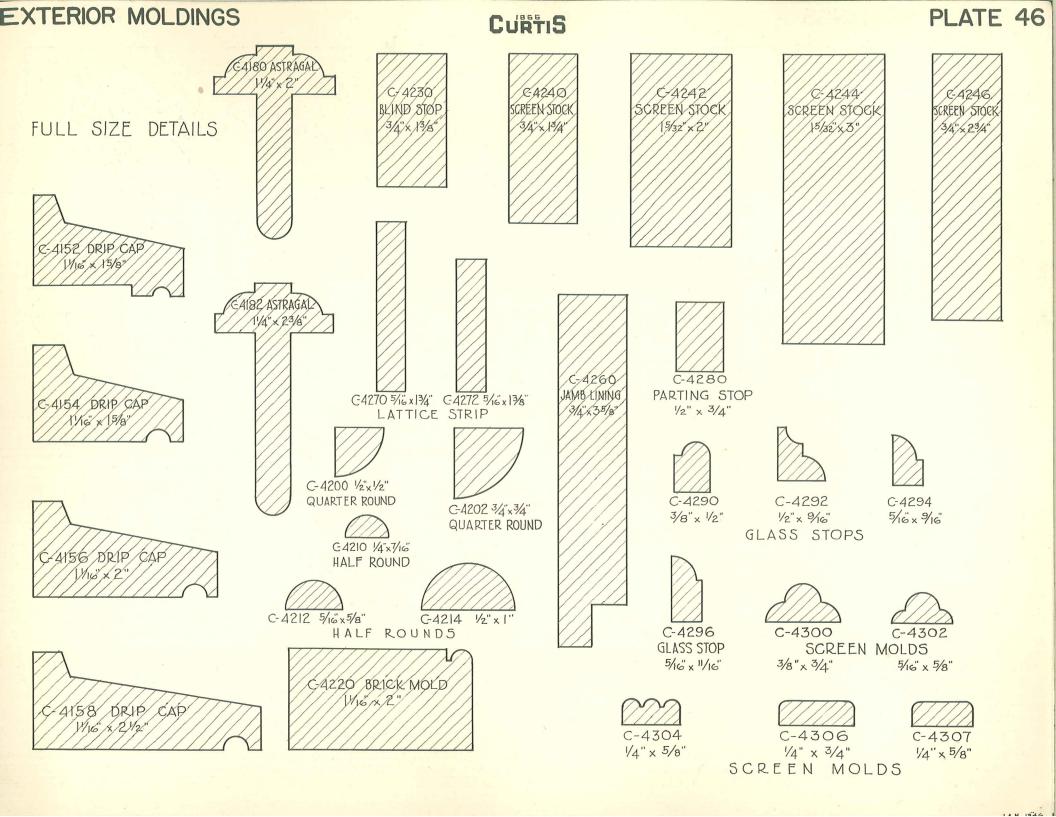


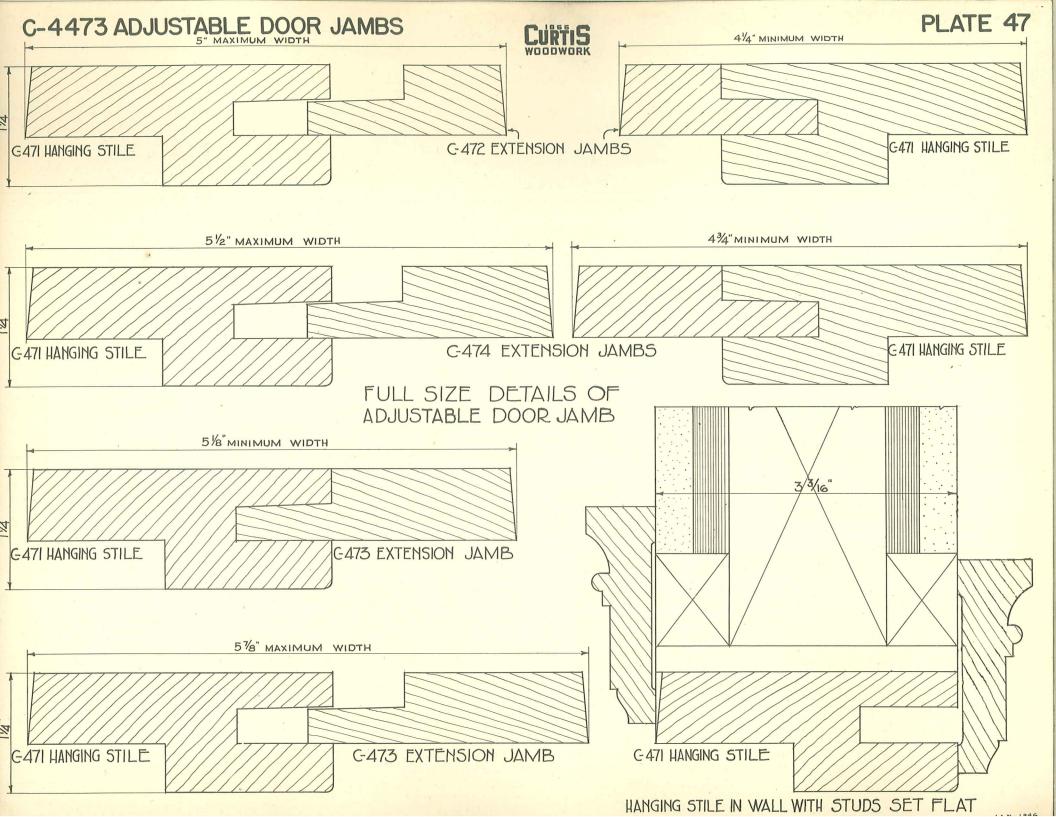


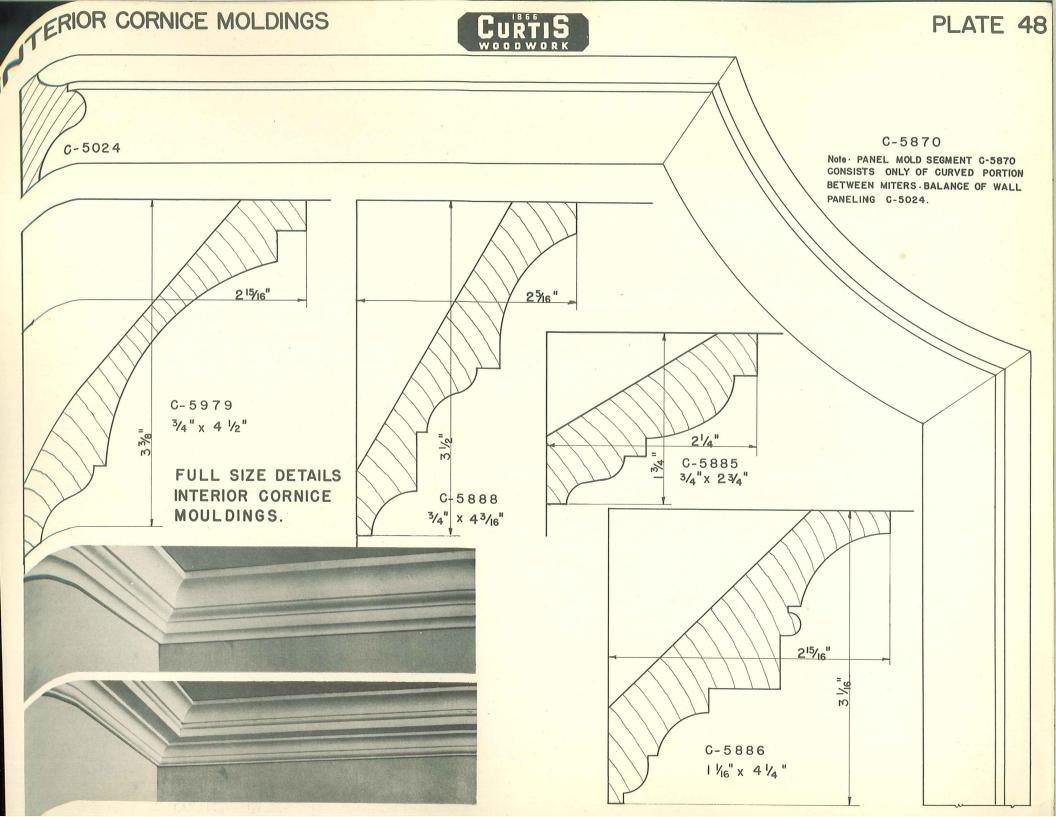


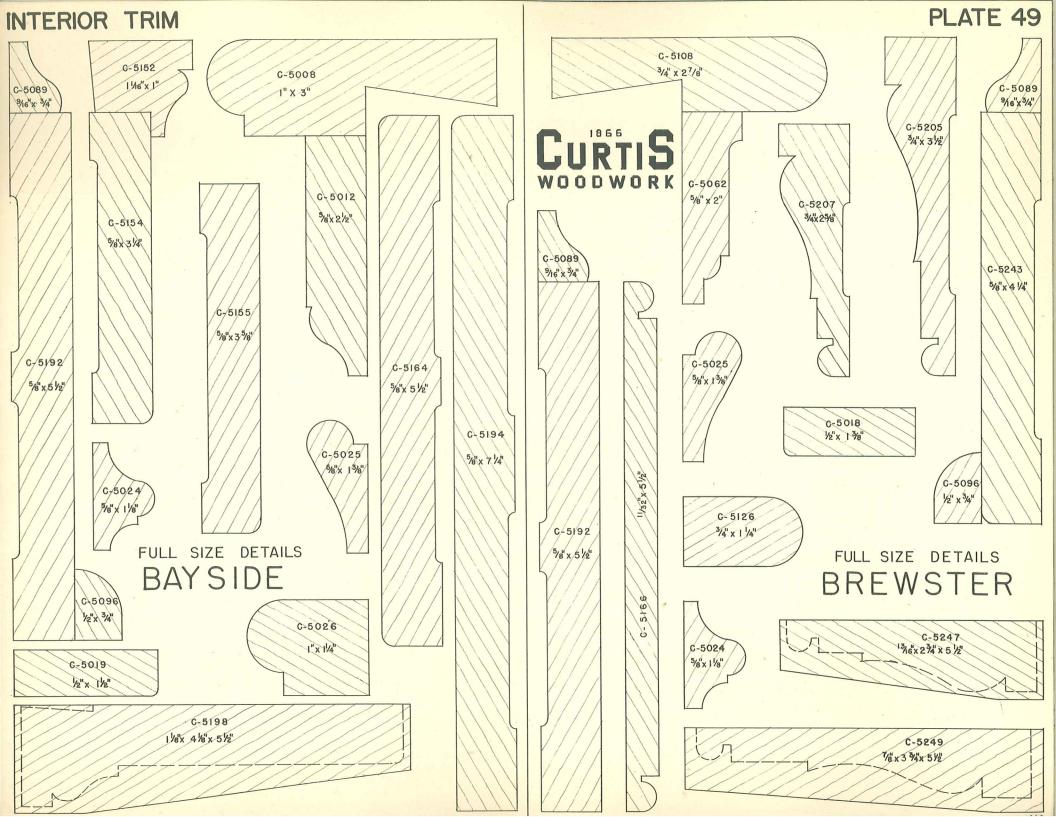


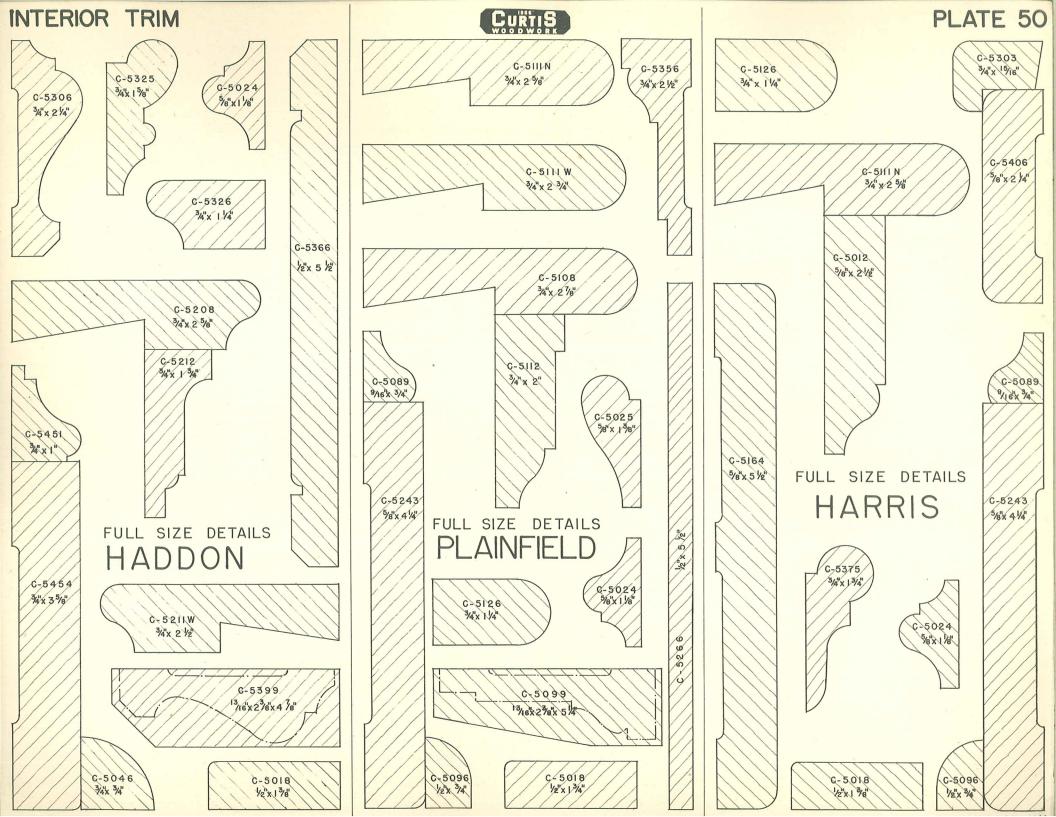


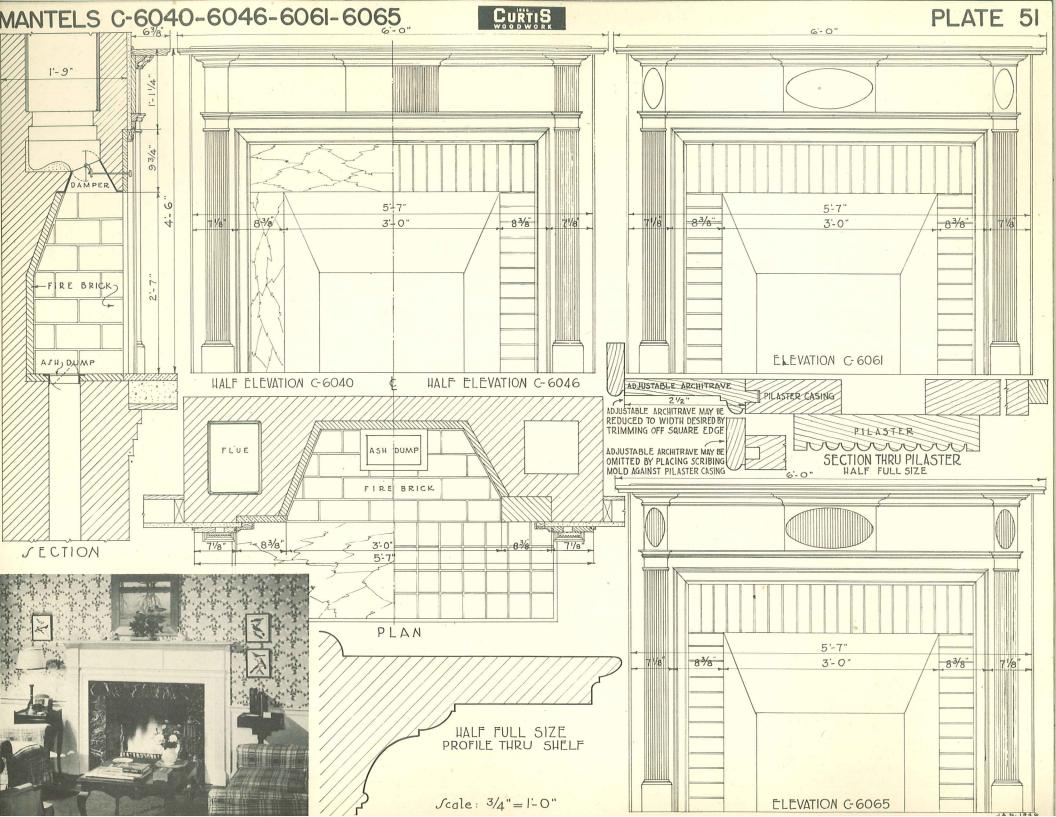


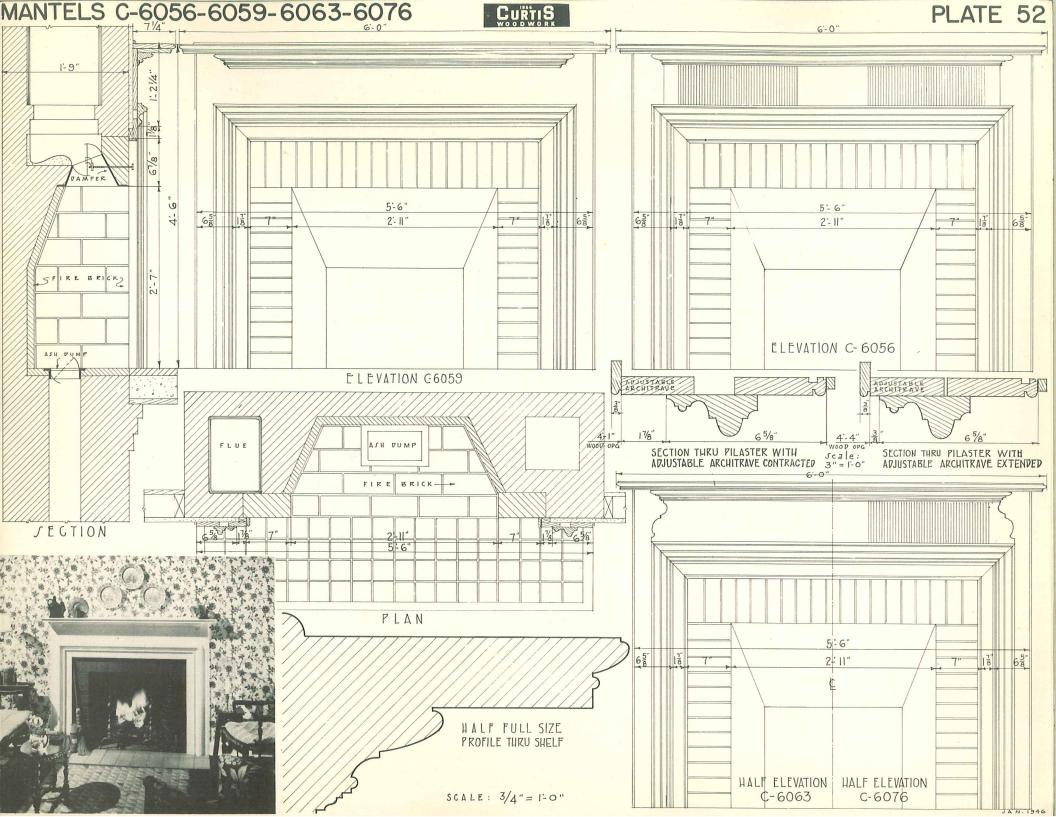


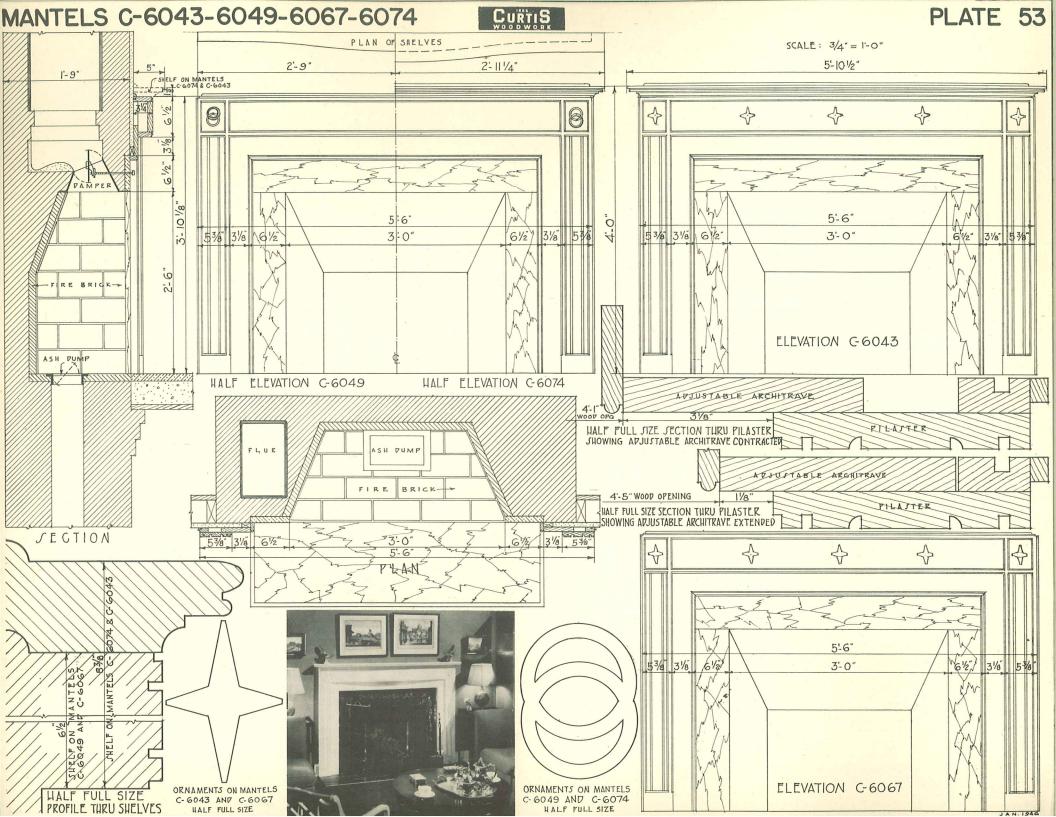


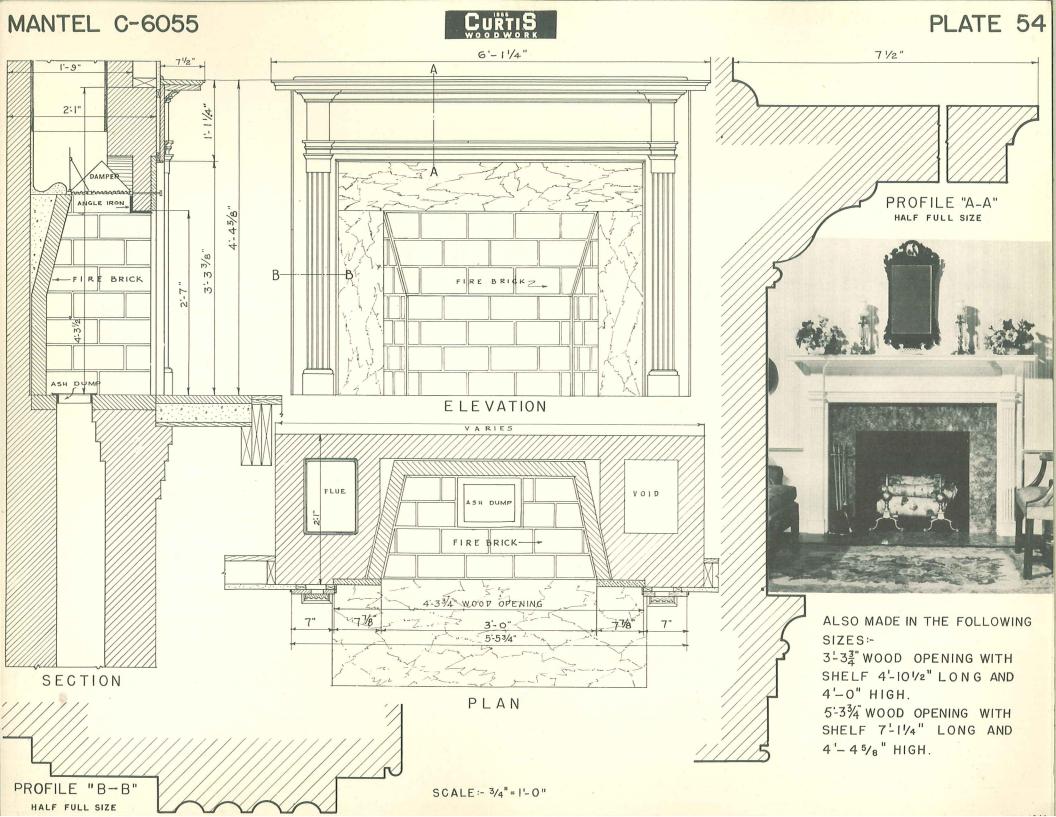


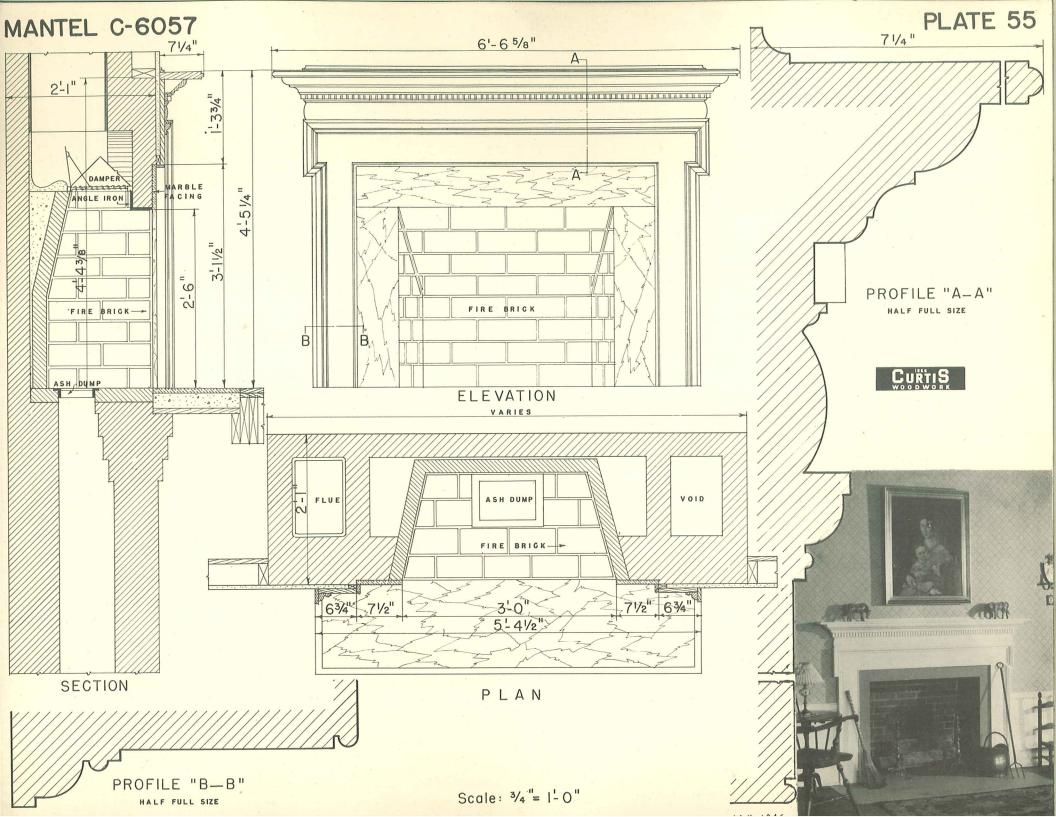


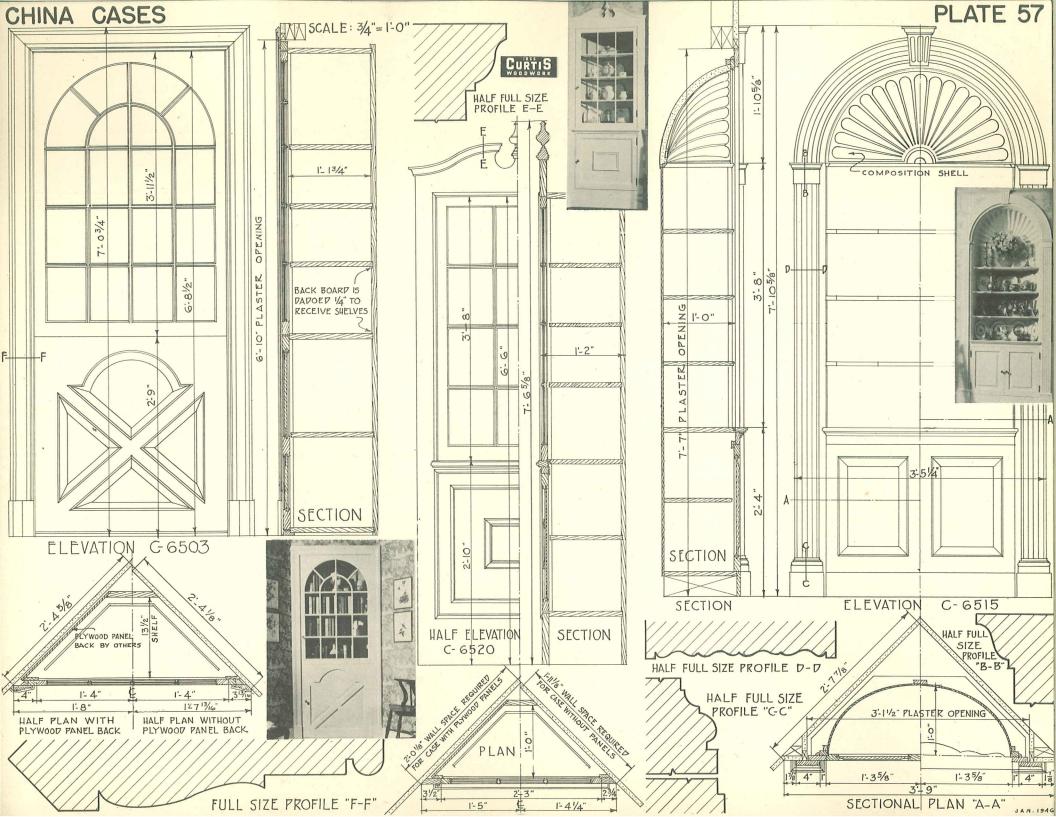


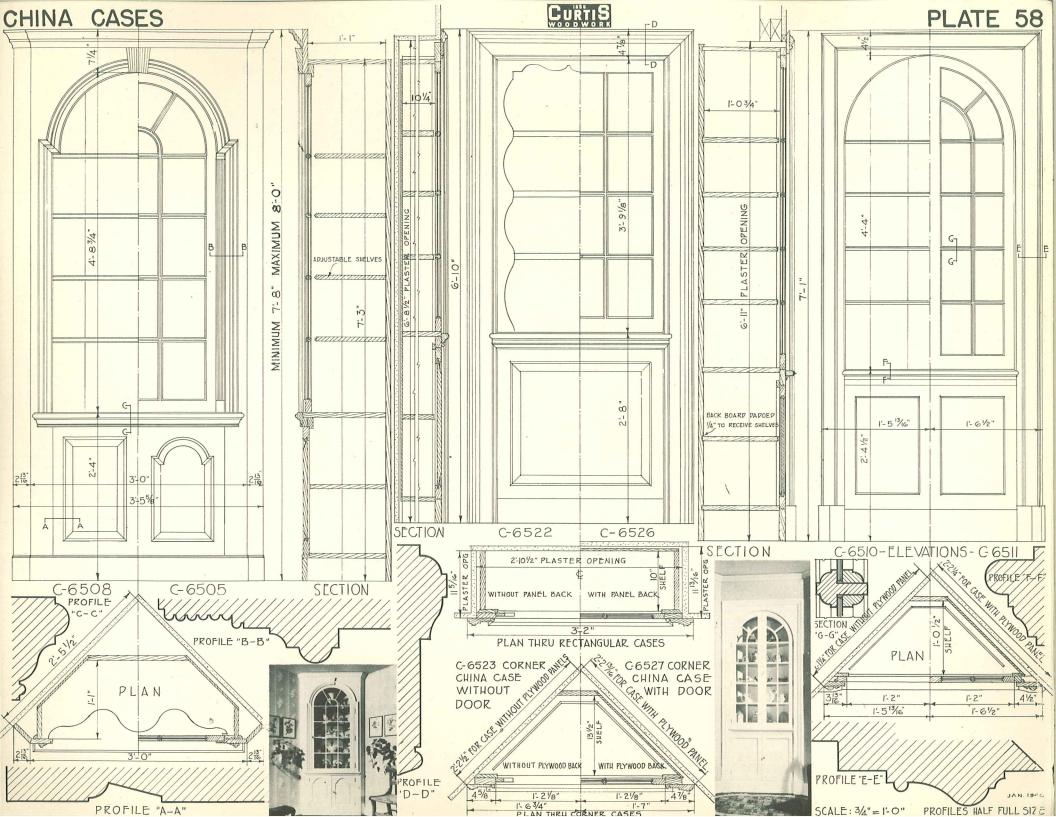


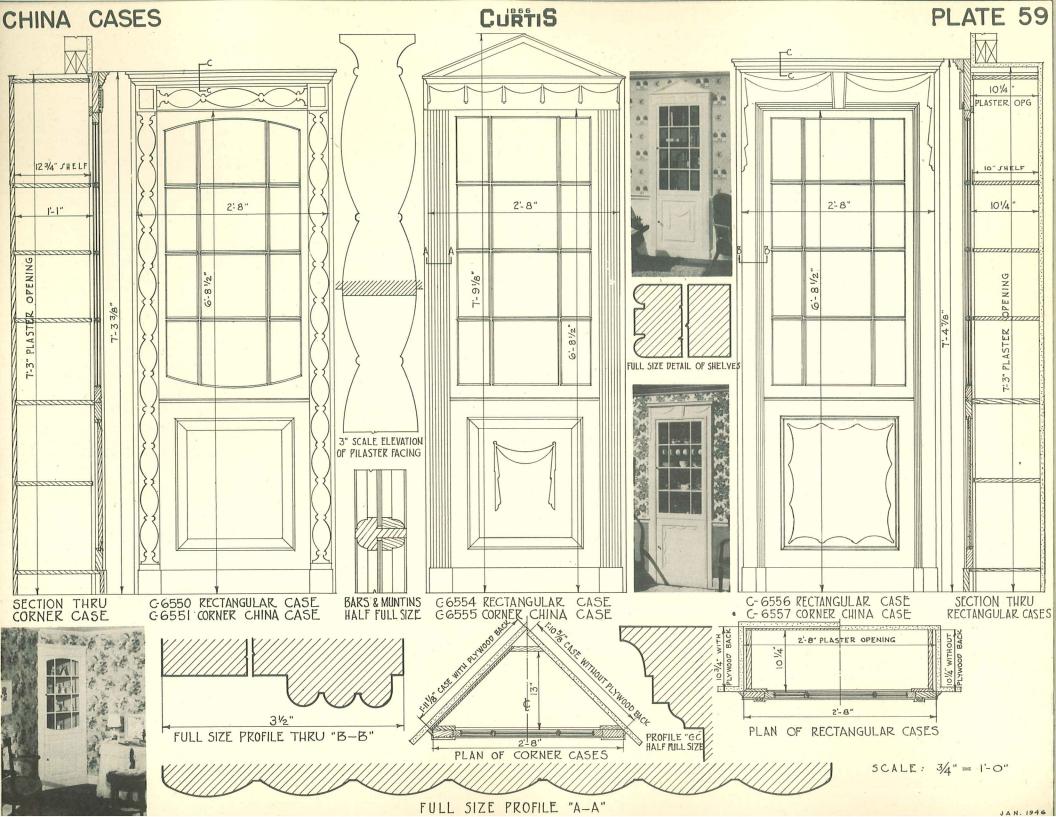


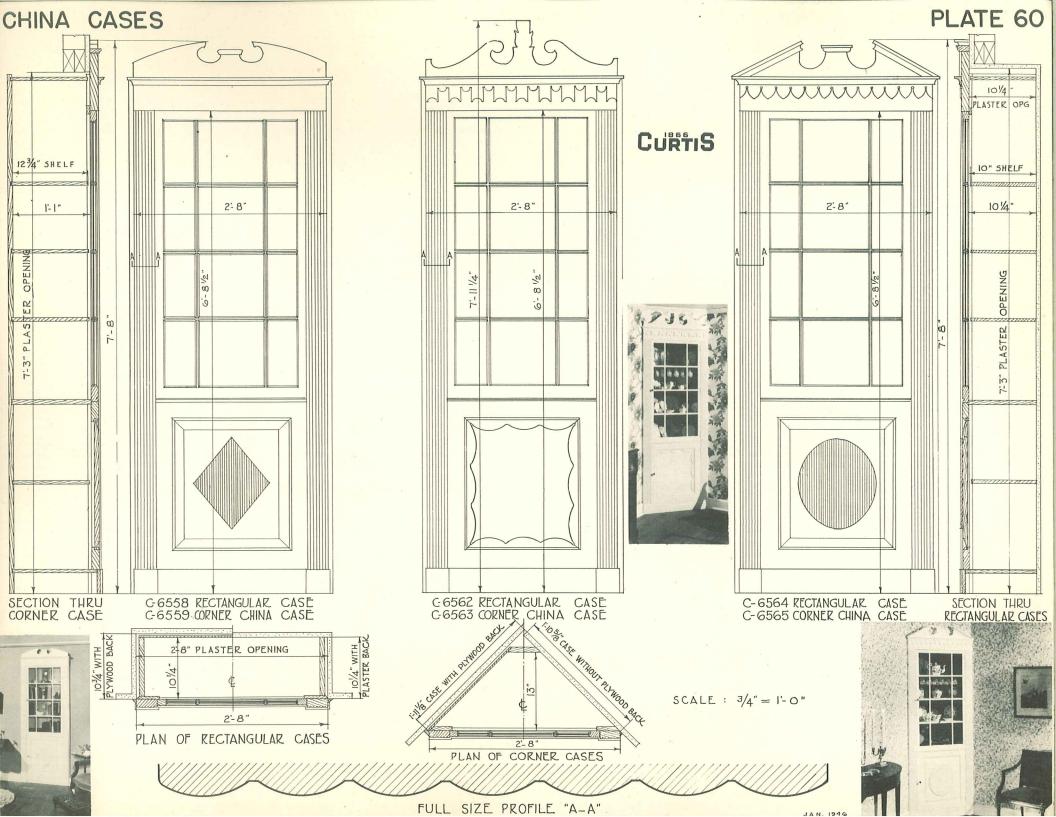

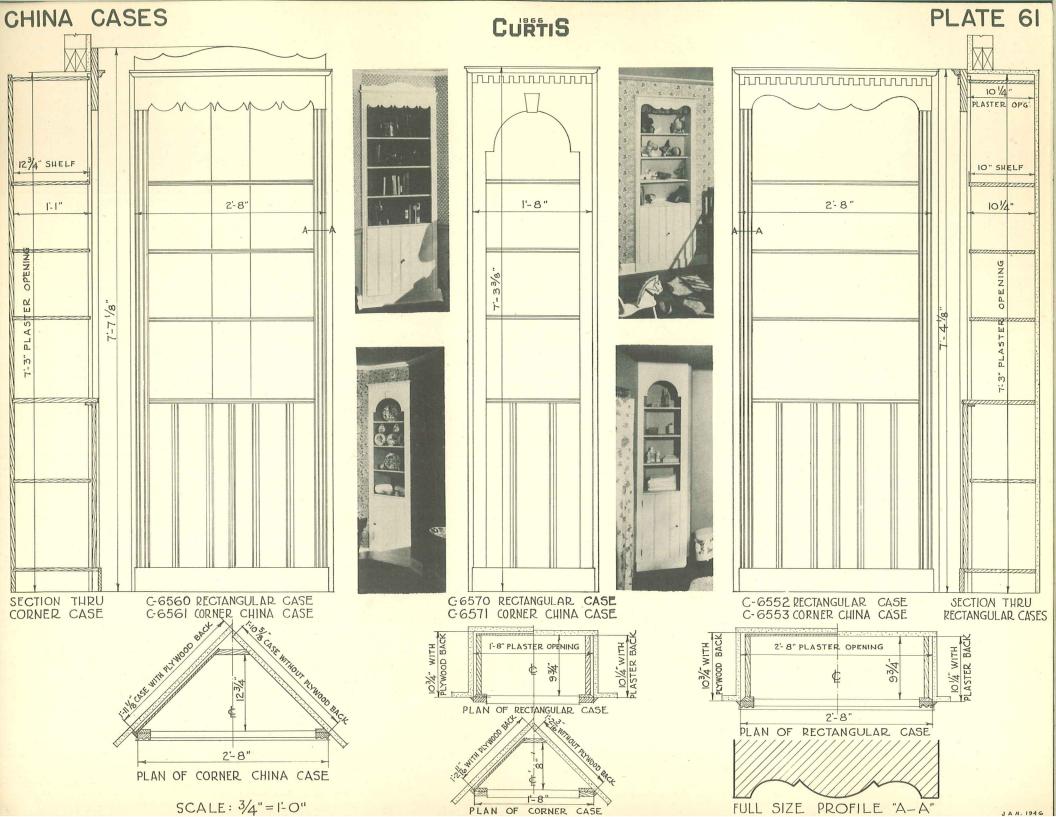

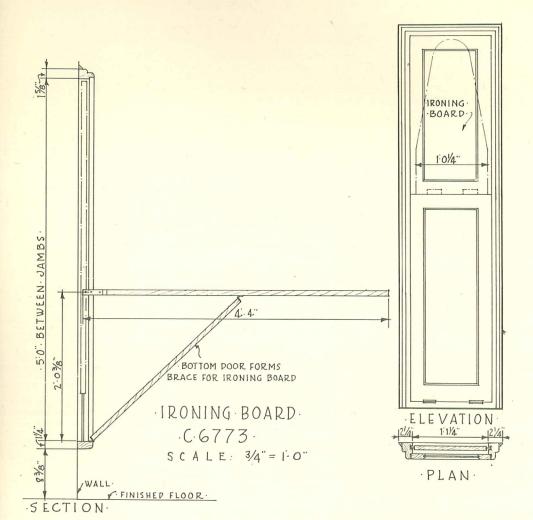


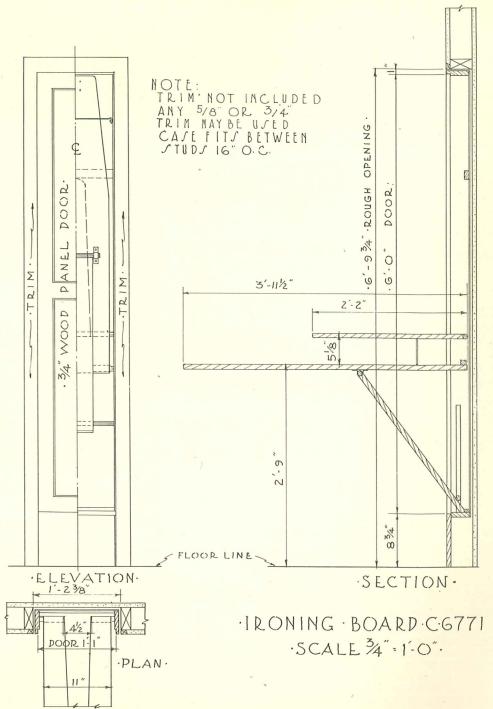

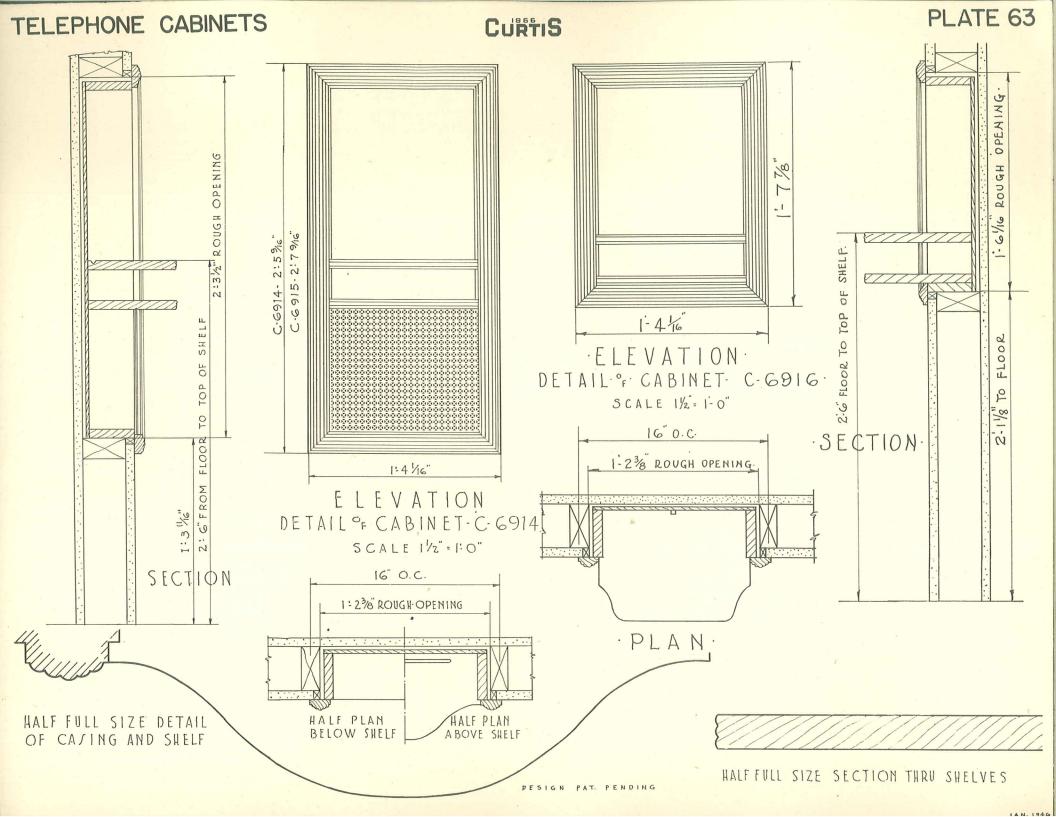





ELEVATION




MEDICINE CABINET G6931



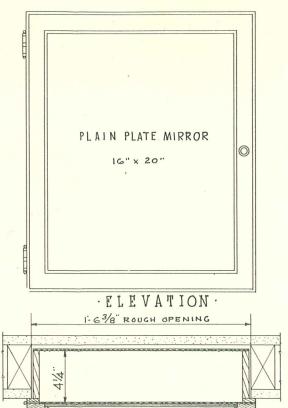

1-71/8" · PLAN·

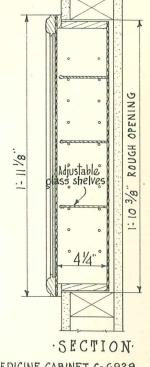



MEDICINE CABINET C-6929 SAME DETAIL EXCEPT MIRROR

SIZE 12" x 14", AND ROUGH OPENING SIZE 1-2 % x 1-4 %"

MEDICINE CABINET G6927

SCALE:  $|\frac{1}{2}| = |-0|$ 

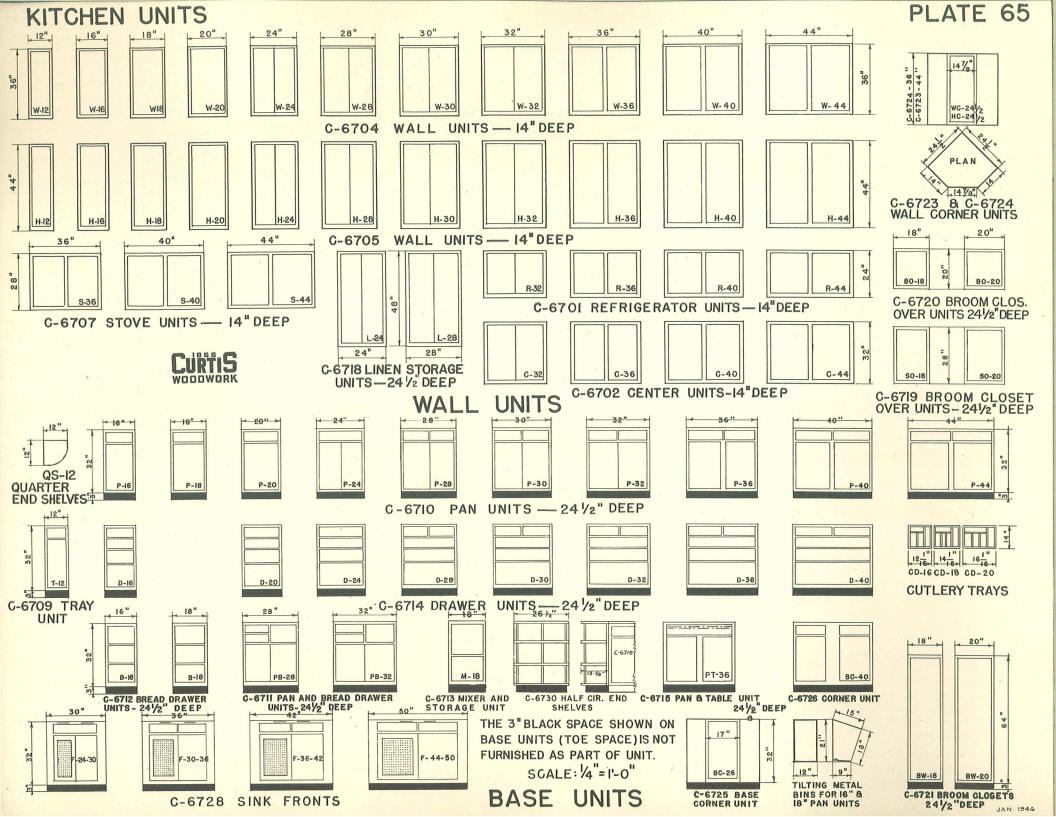


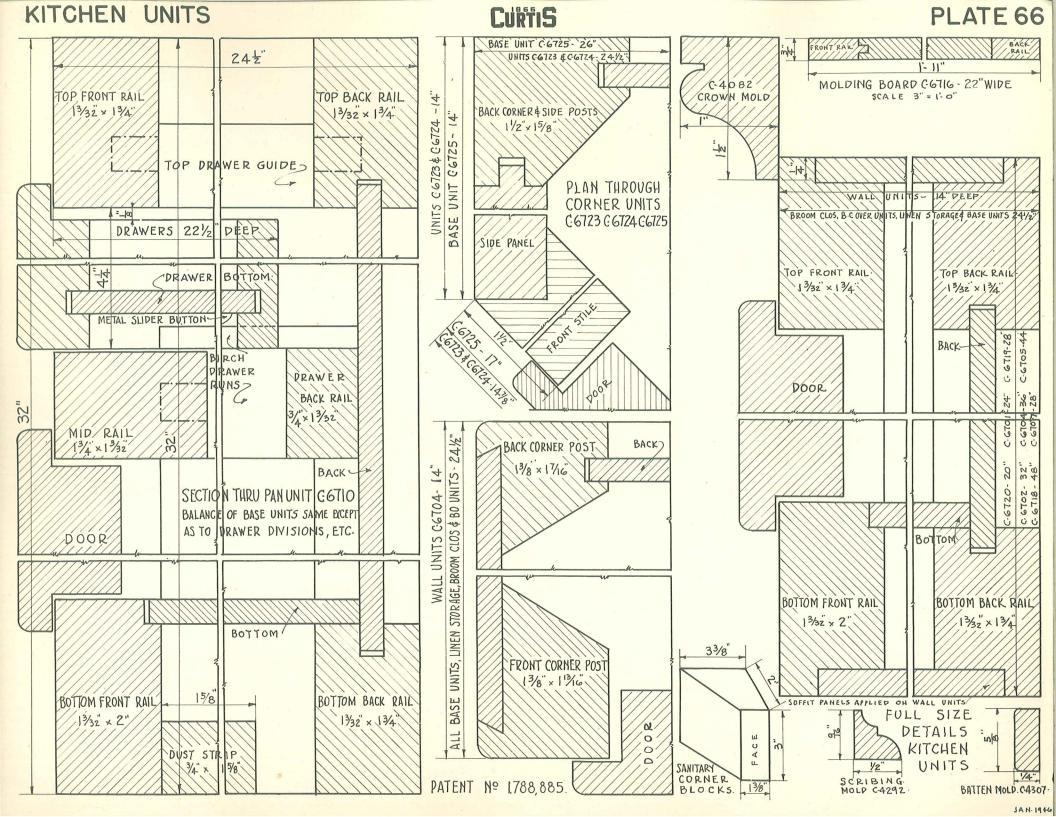

Sink


Clamp

Sink

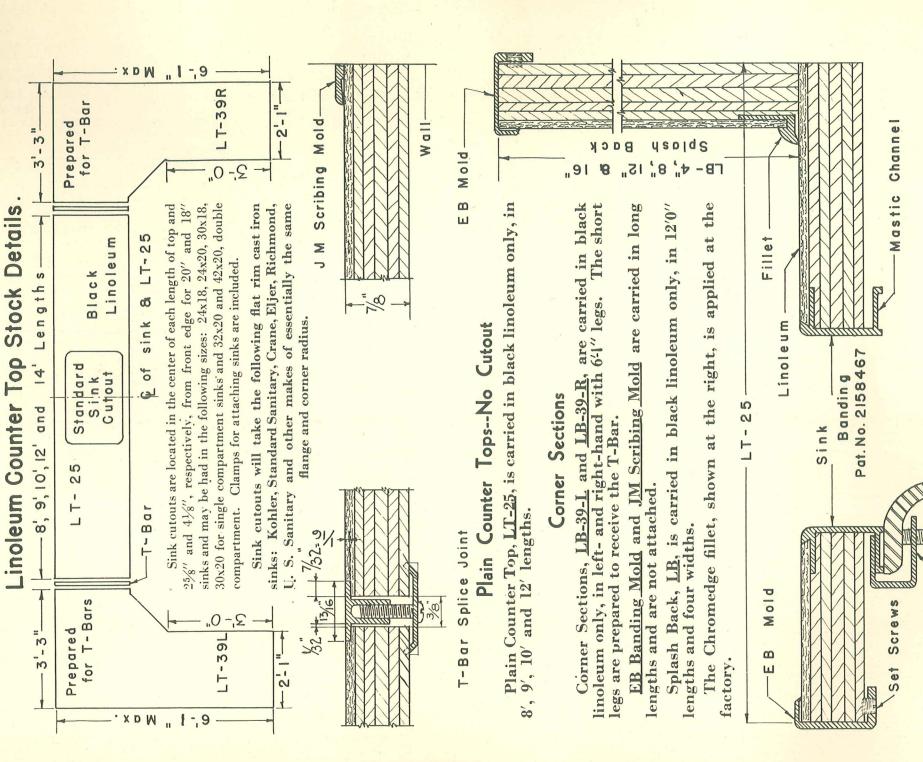

A N. 194

## KITCHEN UNITS

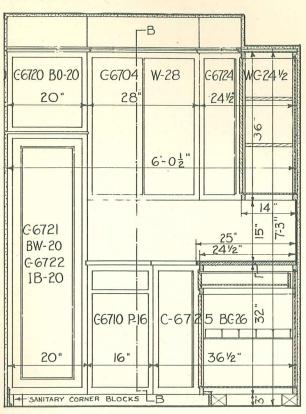


ELEVATION & SECTION THRU "A-A"


## CuRTIS


PLATE 68


241/2"

JAN. 1946

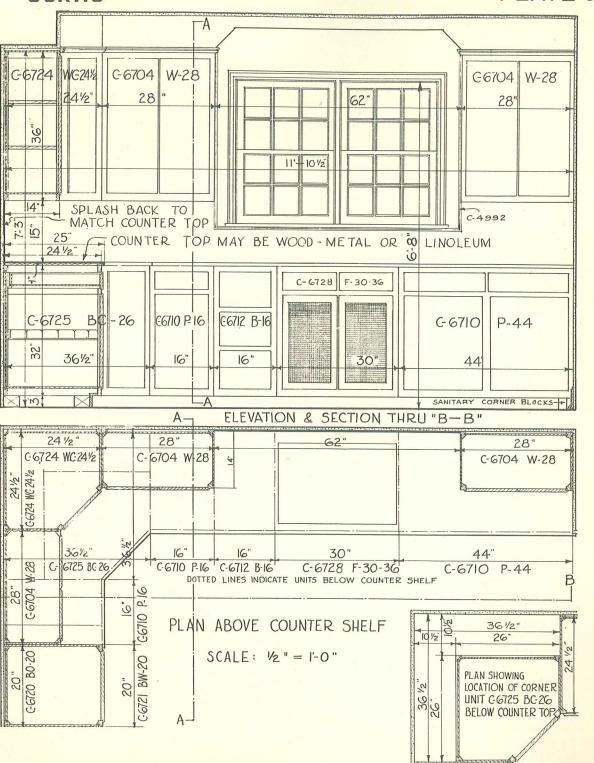

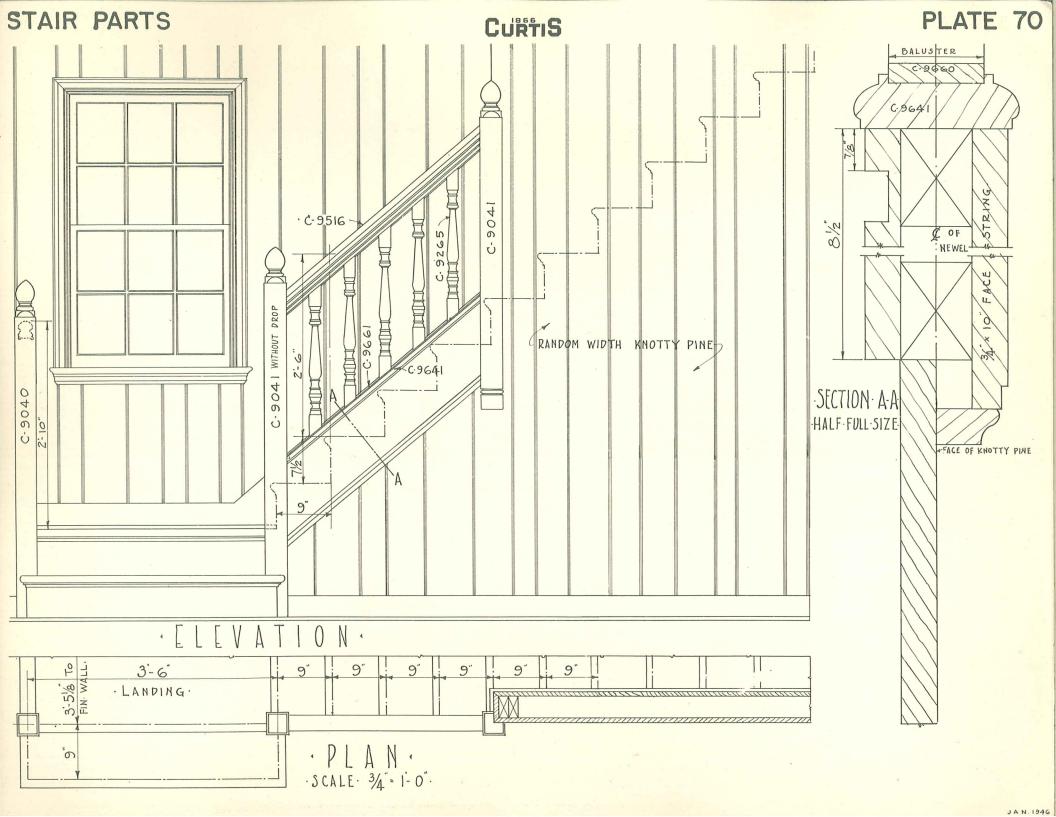

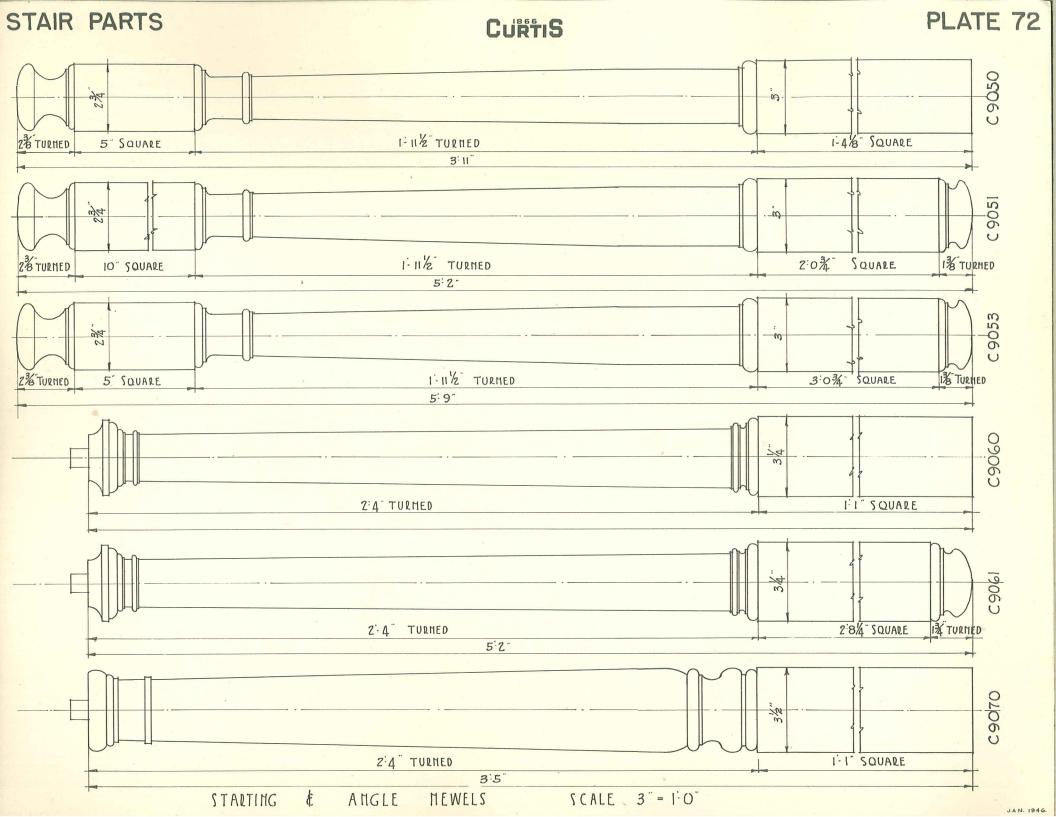


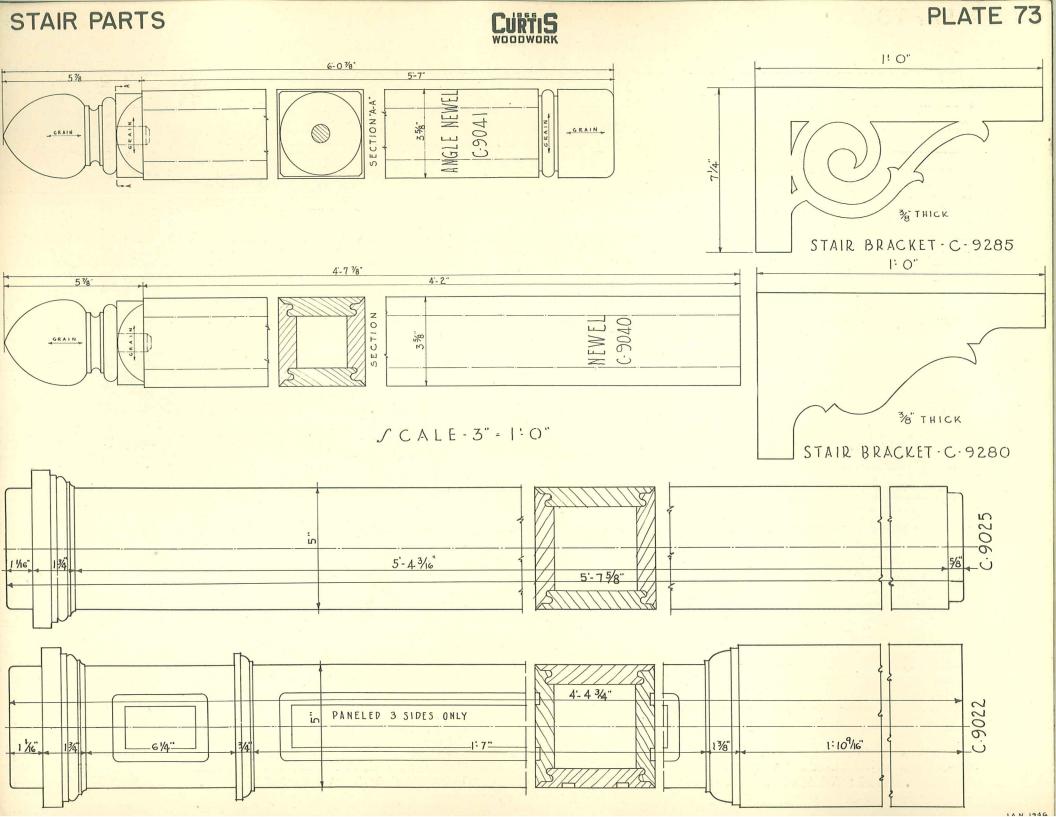



-19


CAL

JAN. 1946

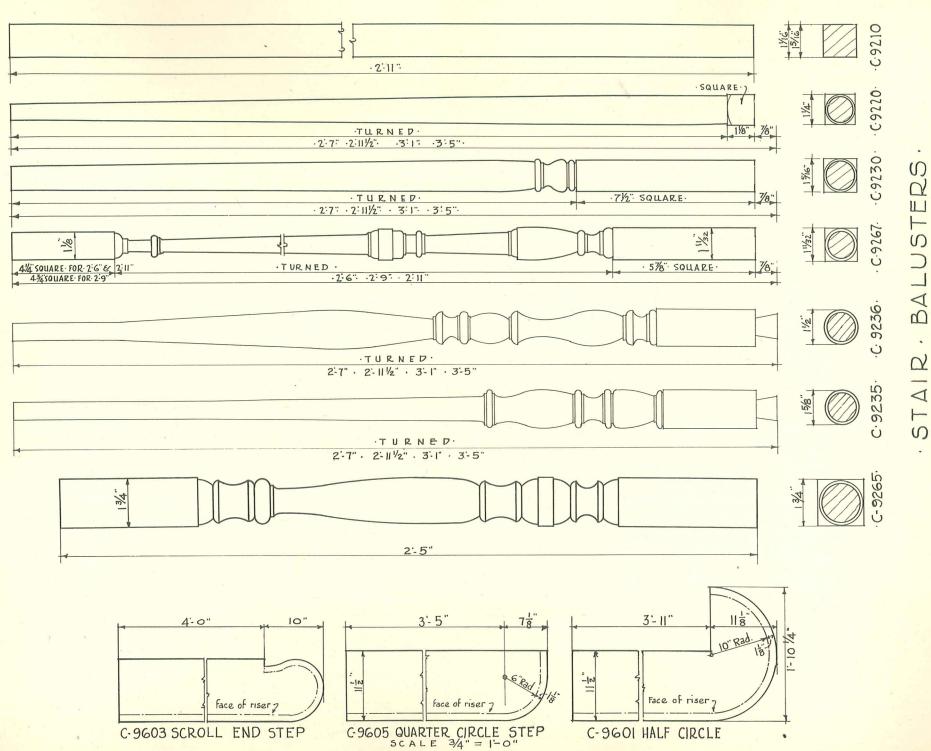


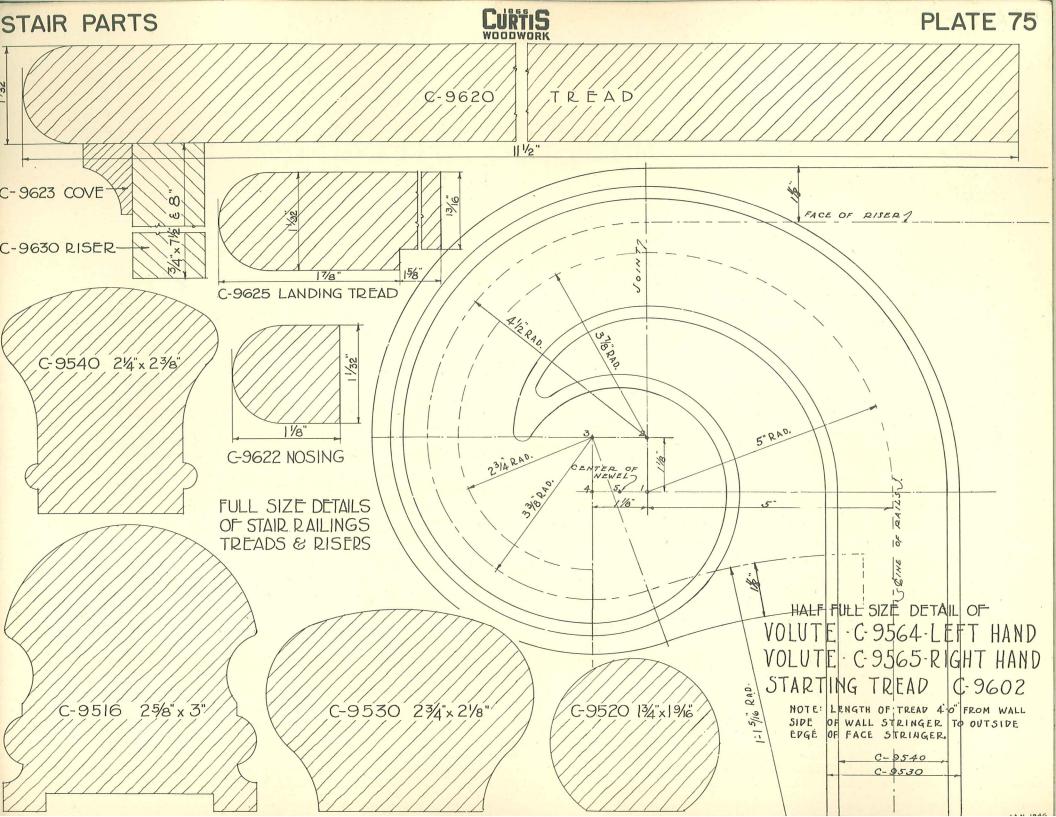


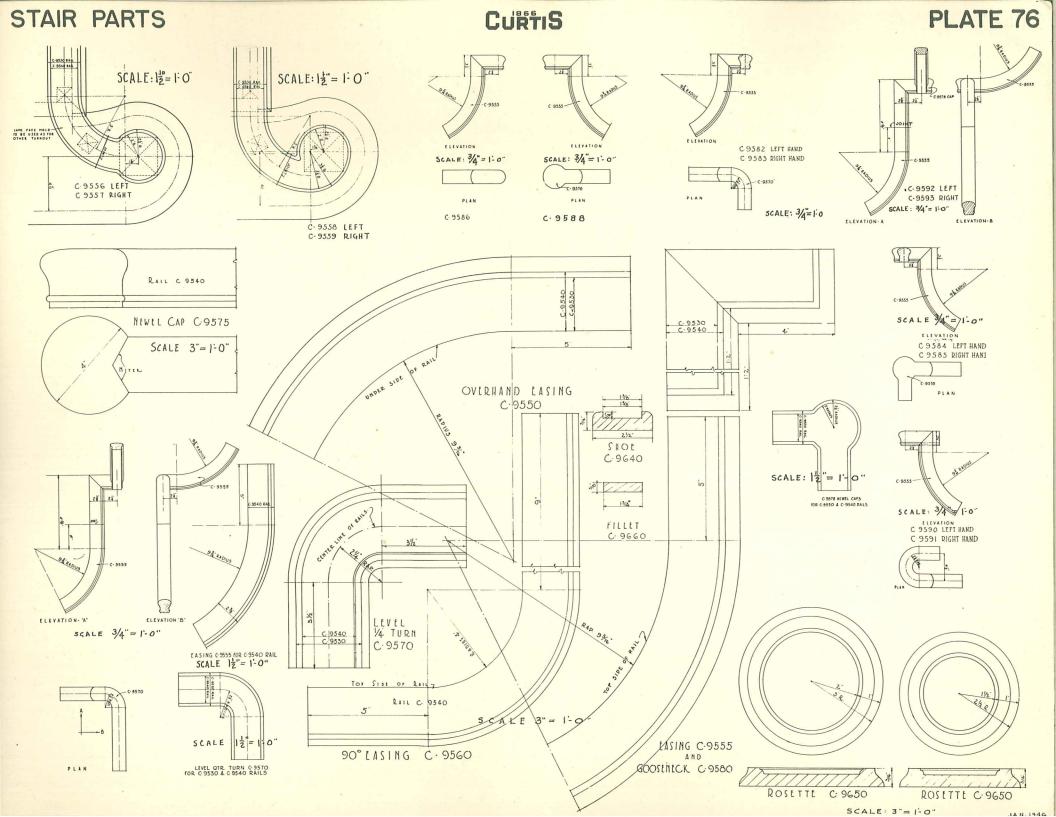


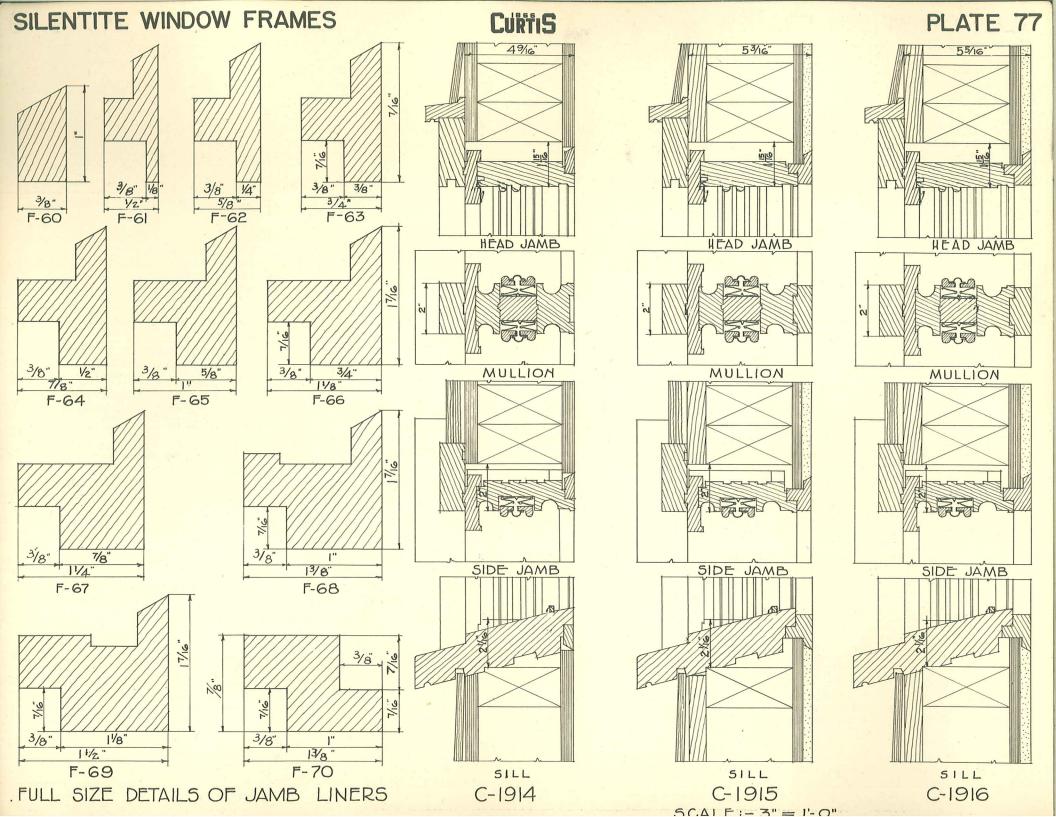




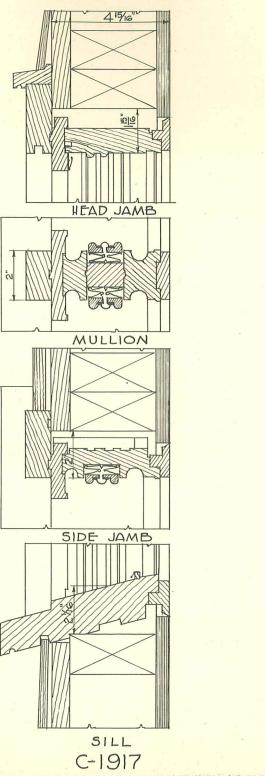


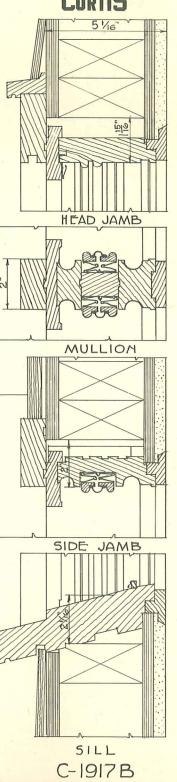

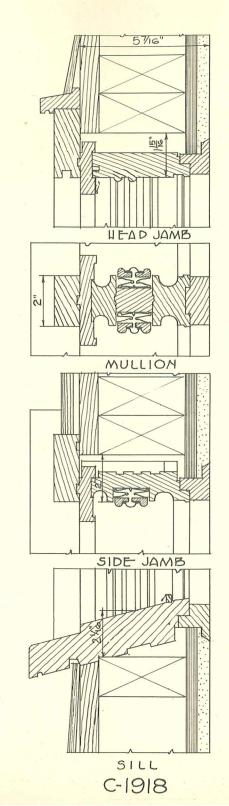




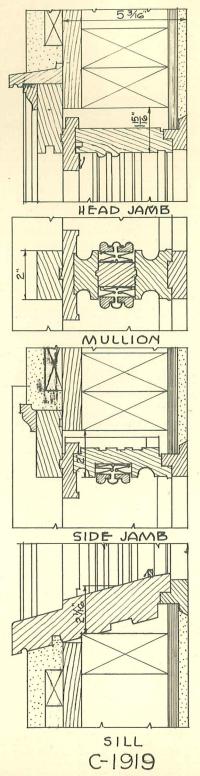


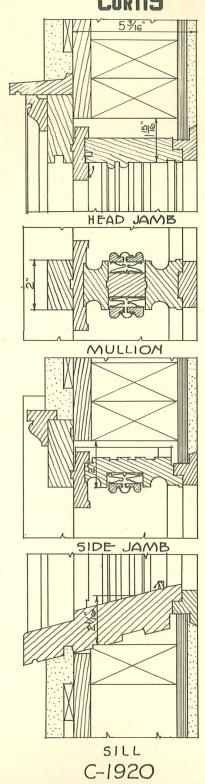

SCALE: 3" = 1'-0"

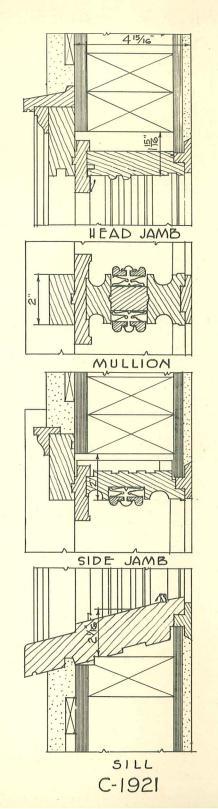





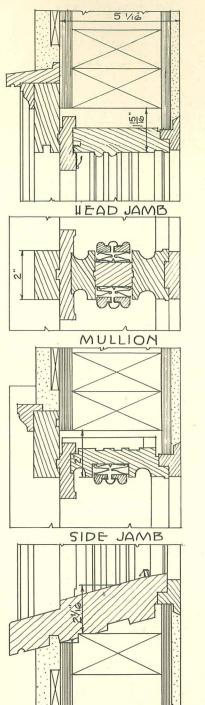



SILL

C-1921A

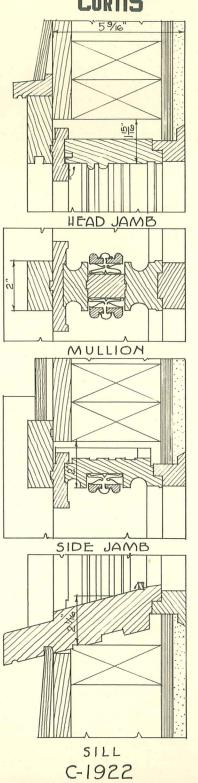

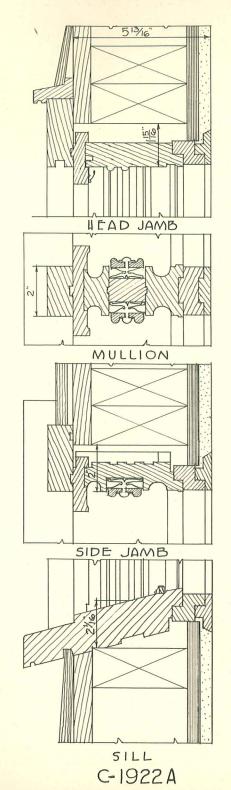

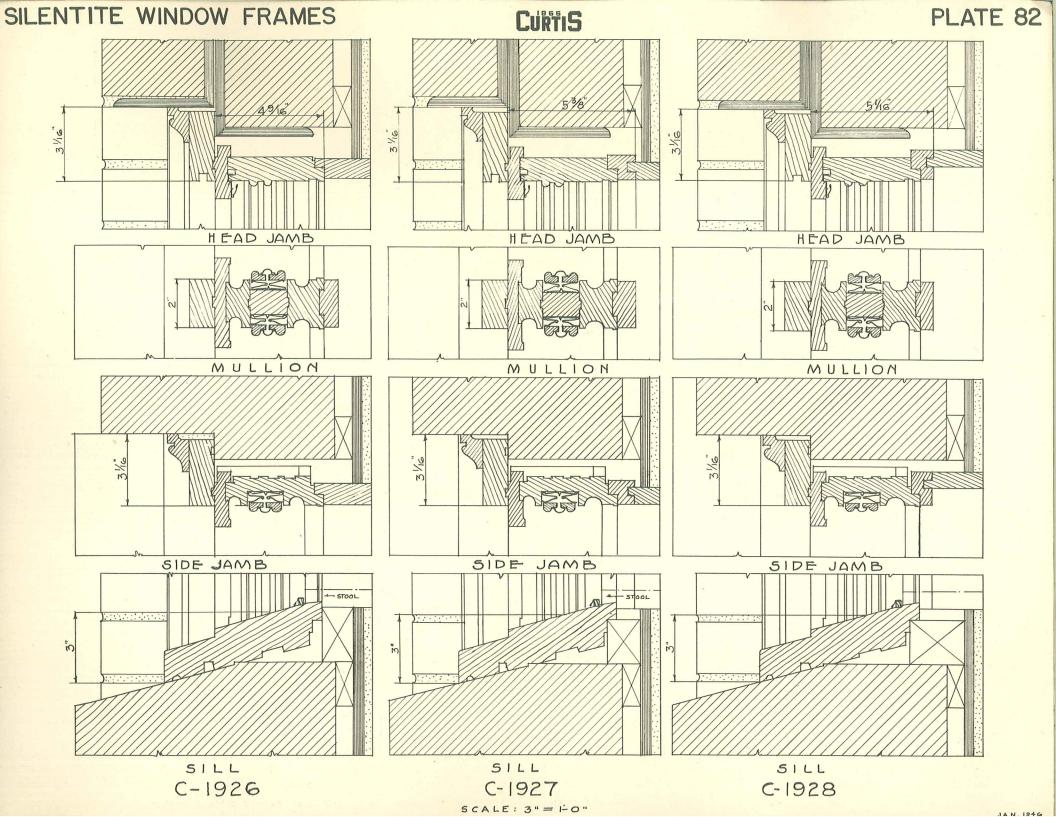

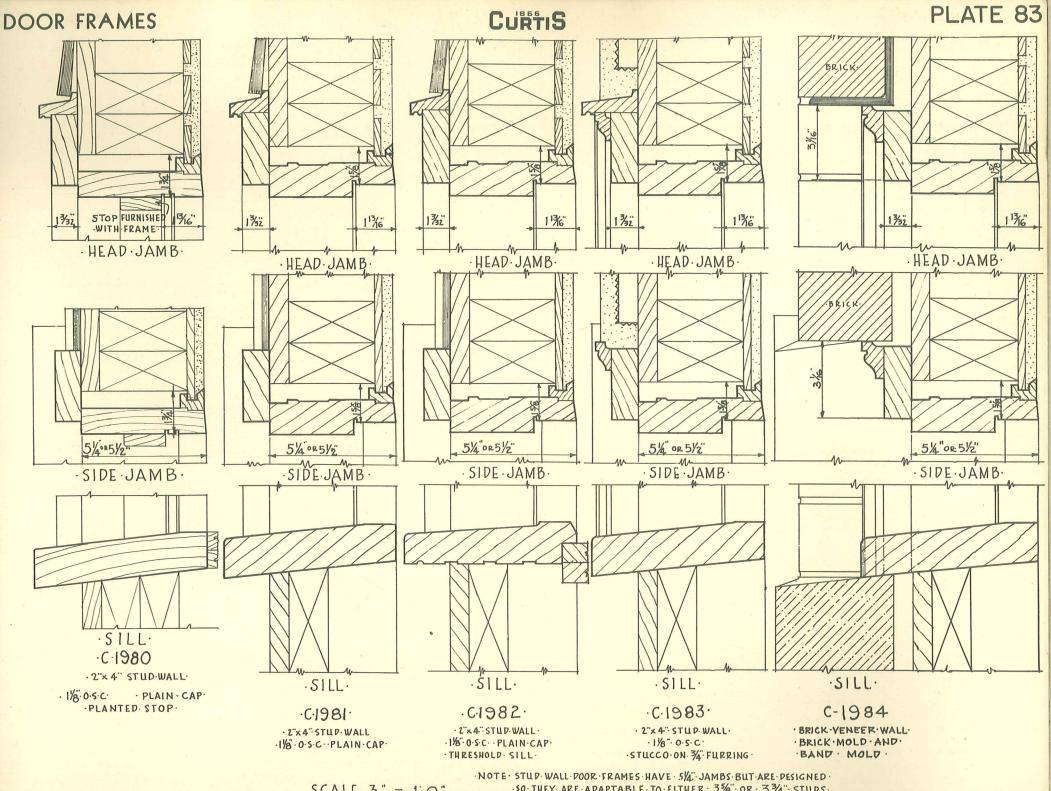

·NOTE·STUP·WALL POOR·FRAMES·HAVE·5¼". JAMBS·BUT·ARE·PESIGNED· ·SO·THEY·ARE·APAPTABLE·TO·EITHER· 3%". OR·る¾". STUPS· ·THESE·FRAMES·ALSO·RABBETED FOR·1%" POORS· SCALE. 3" = 1-0"

